


- NOTE:**
- Apply ExoAir Primer to all exposed gypsum core prior to application of membrane
  - Install reinforcing mesh with 50 wet mils of ExoAir230, completely covering reinforcing mesh.
  - Roofing system and detailing to be installed per roofing manufacturer's instructions

See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.*

The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters. The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.

 <p><b>USG CGC TREMCO</b> PERFORMANCE BUILT IN</p>	<p><b>United States Gypsum Company</b> 550 West Adams Street Chicago, IL 60661</p> <p>USG Technical &amp; Customer Support: 800.USG.4YOU (874-4968)</p>	<p><b>Tremco Commercial Sealants &amp; Waterproofing</b> 3735 Green Road Beachwood, OH 44122</p> <p>Tremco Technical Support: 866.209.2404</p>	<p><b>Roof Parapet to Wall</b></p>	<p>Rev. No.    Rev. Date</p>
	<p>Scale: 3" = 1'-0"</p>			<p><b>12785</b></p>

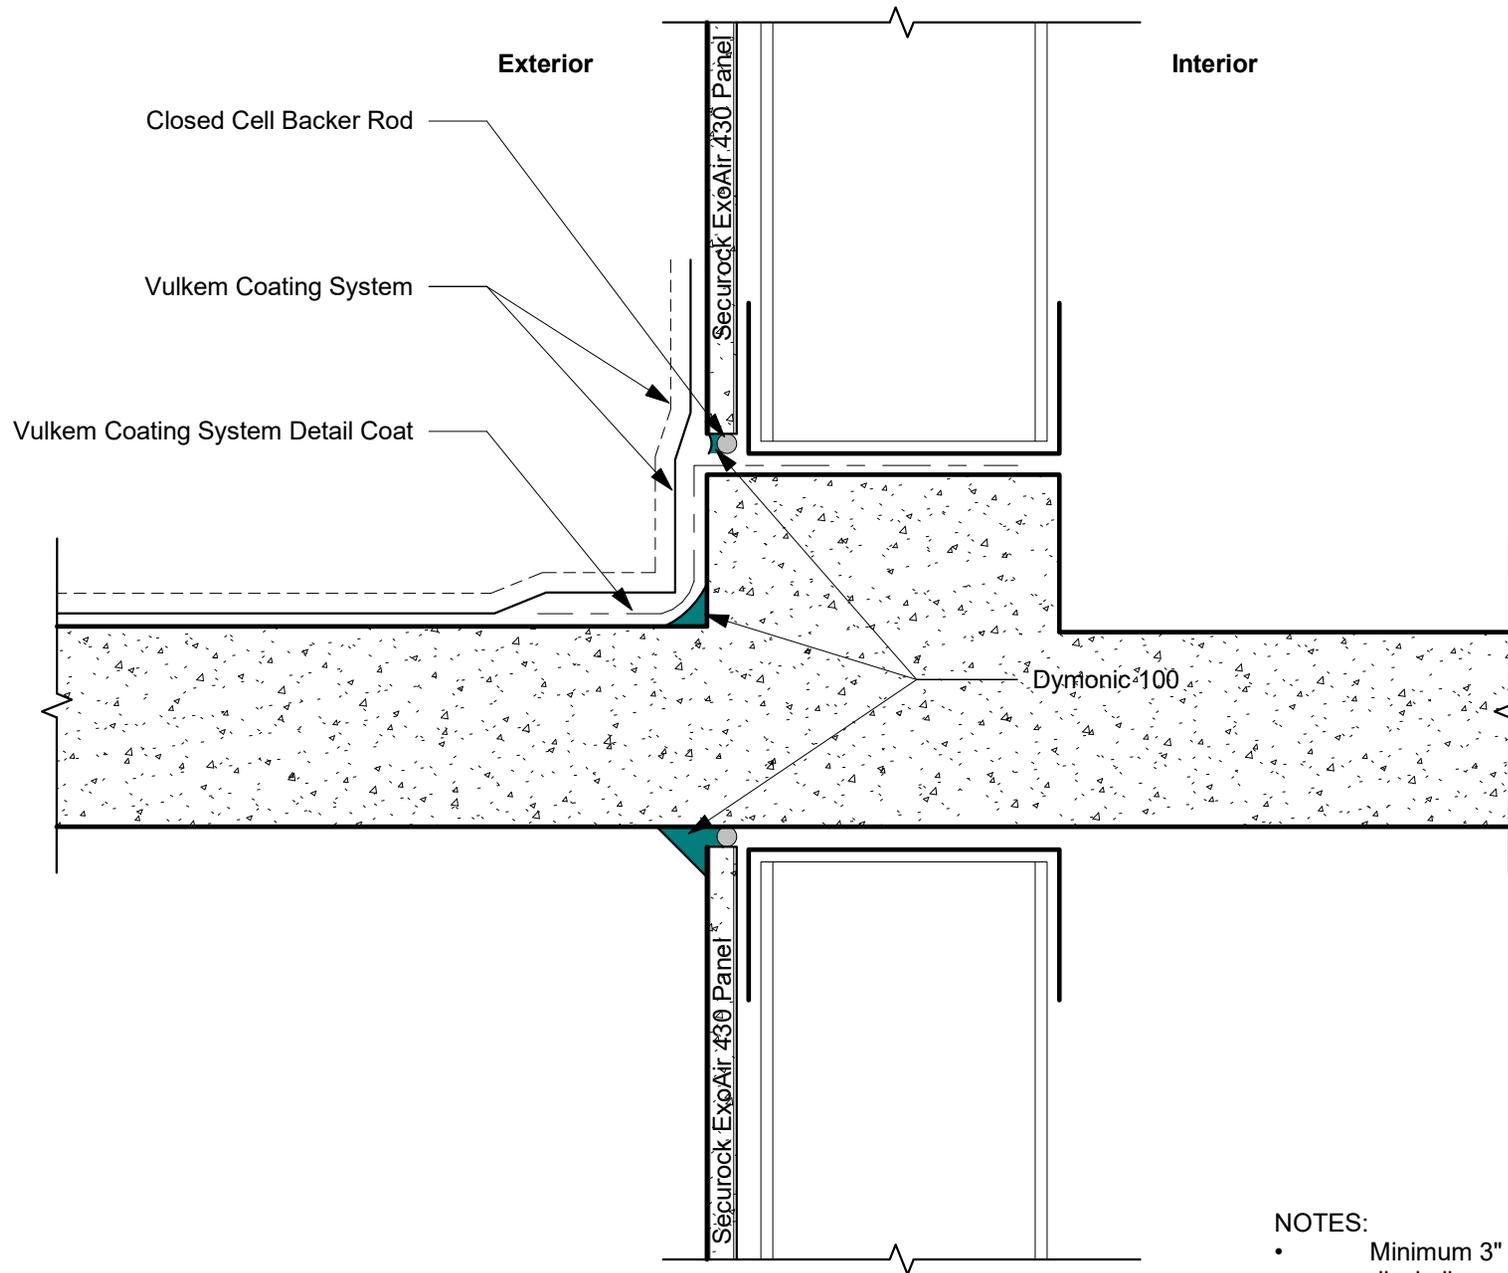

**NOTES:**

- Minimum 3" overlap required for all dissimilar materials and/or change in plane

See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.*

*The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.*

*The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.*



**United States Gypsum Company**  
550 West Adams Street  
Chicago, IL 60661

USG Technical & Customer Support:  
800.USG.4YOU (874-4968)

**Tremco Commercial Sealants & Waterproofing**  
3735 Green Road  
Beachwood, OH 44122


Tremco Technical Support:  
866.209.2404

Wall to Balcony

Scale: 3" = 1'-0"

Rev. No. Rev. Date

12786

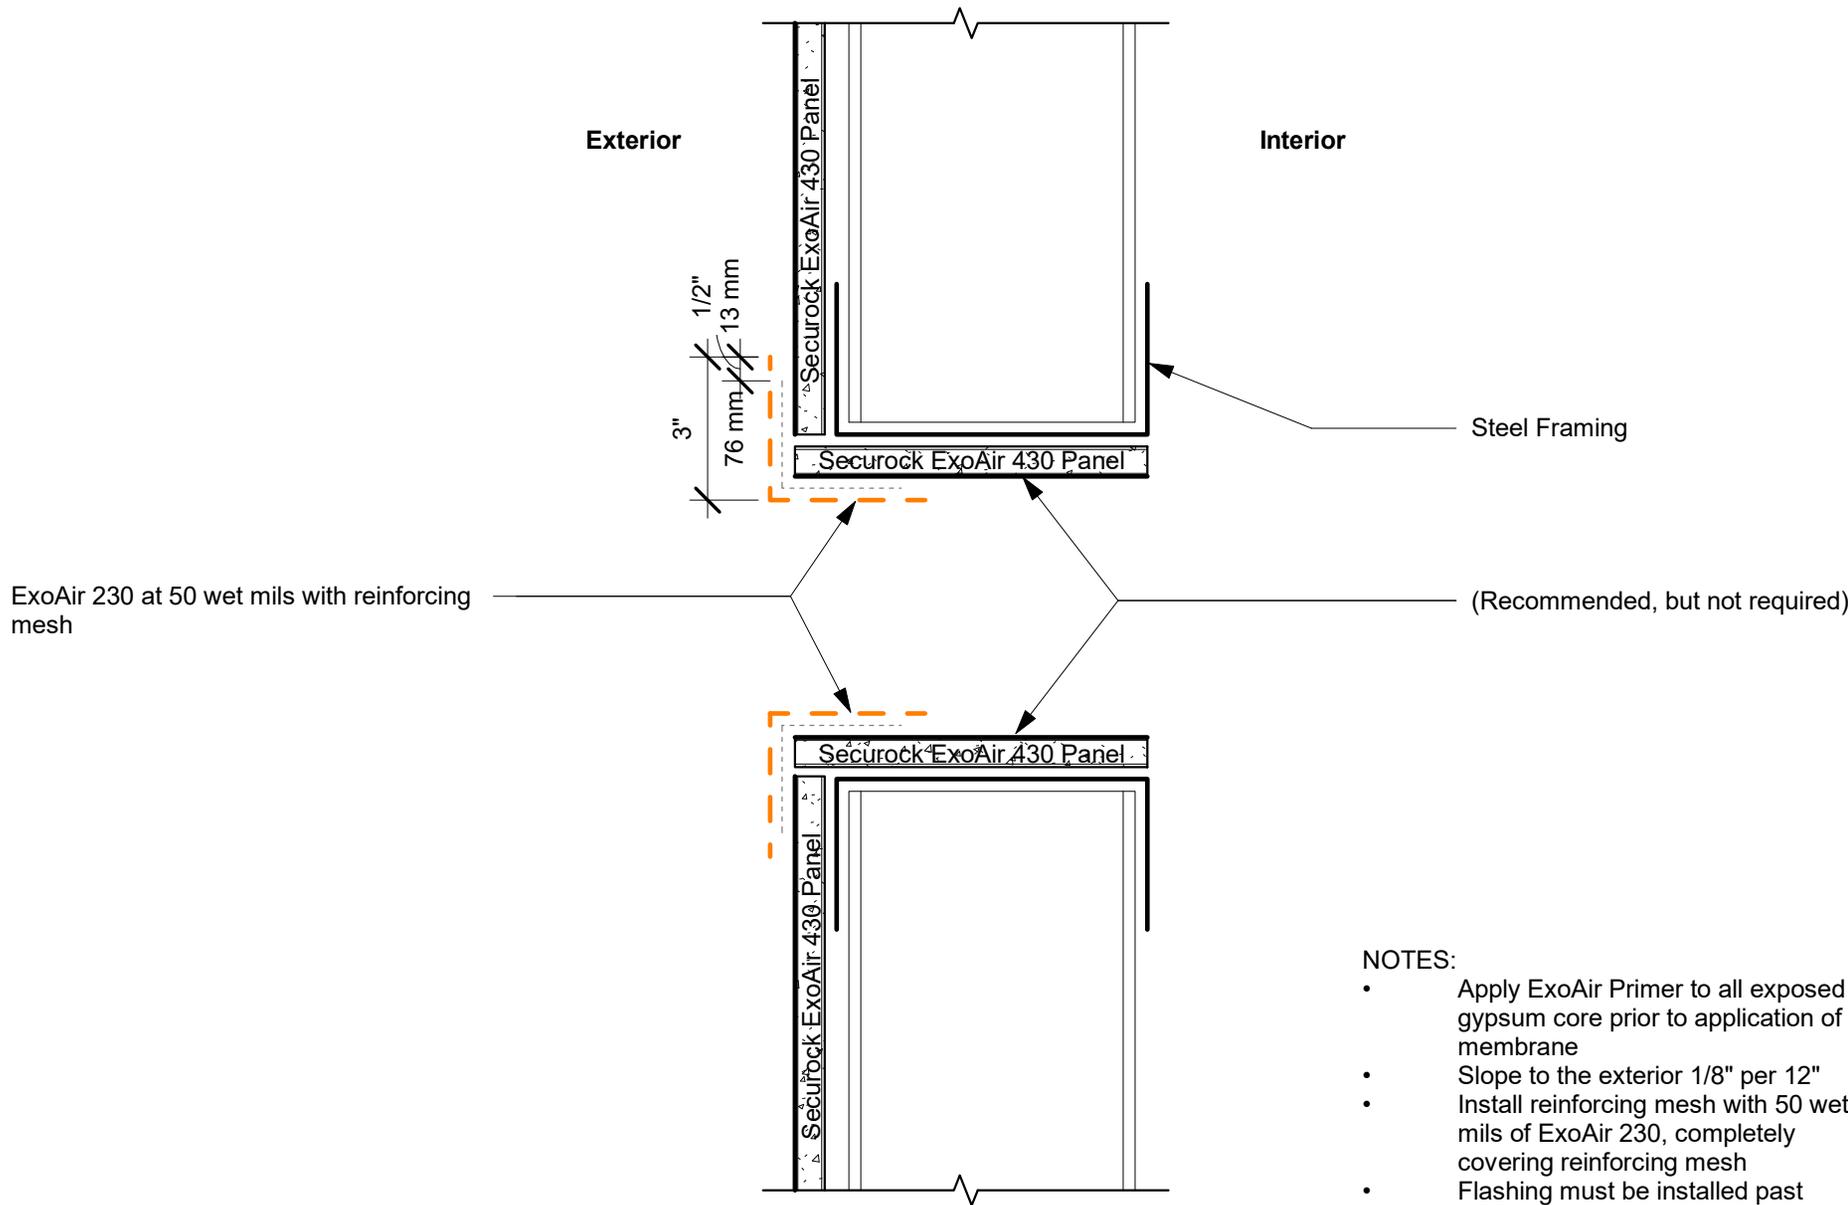


See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.*

The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.

The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.

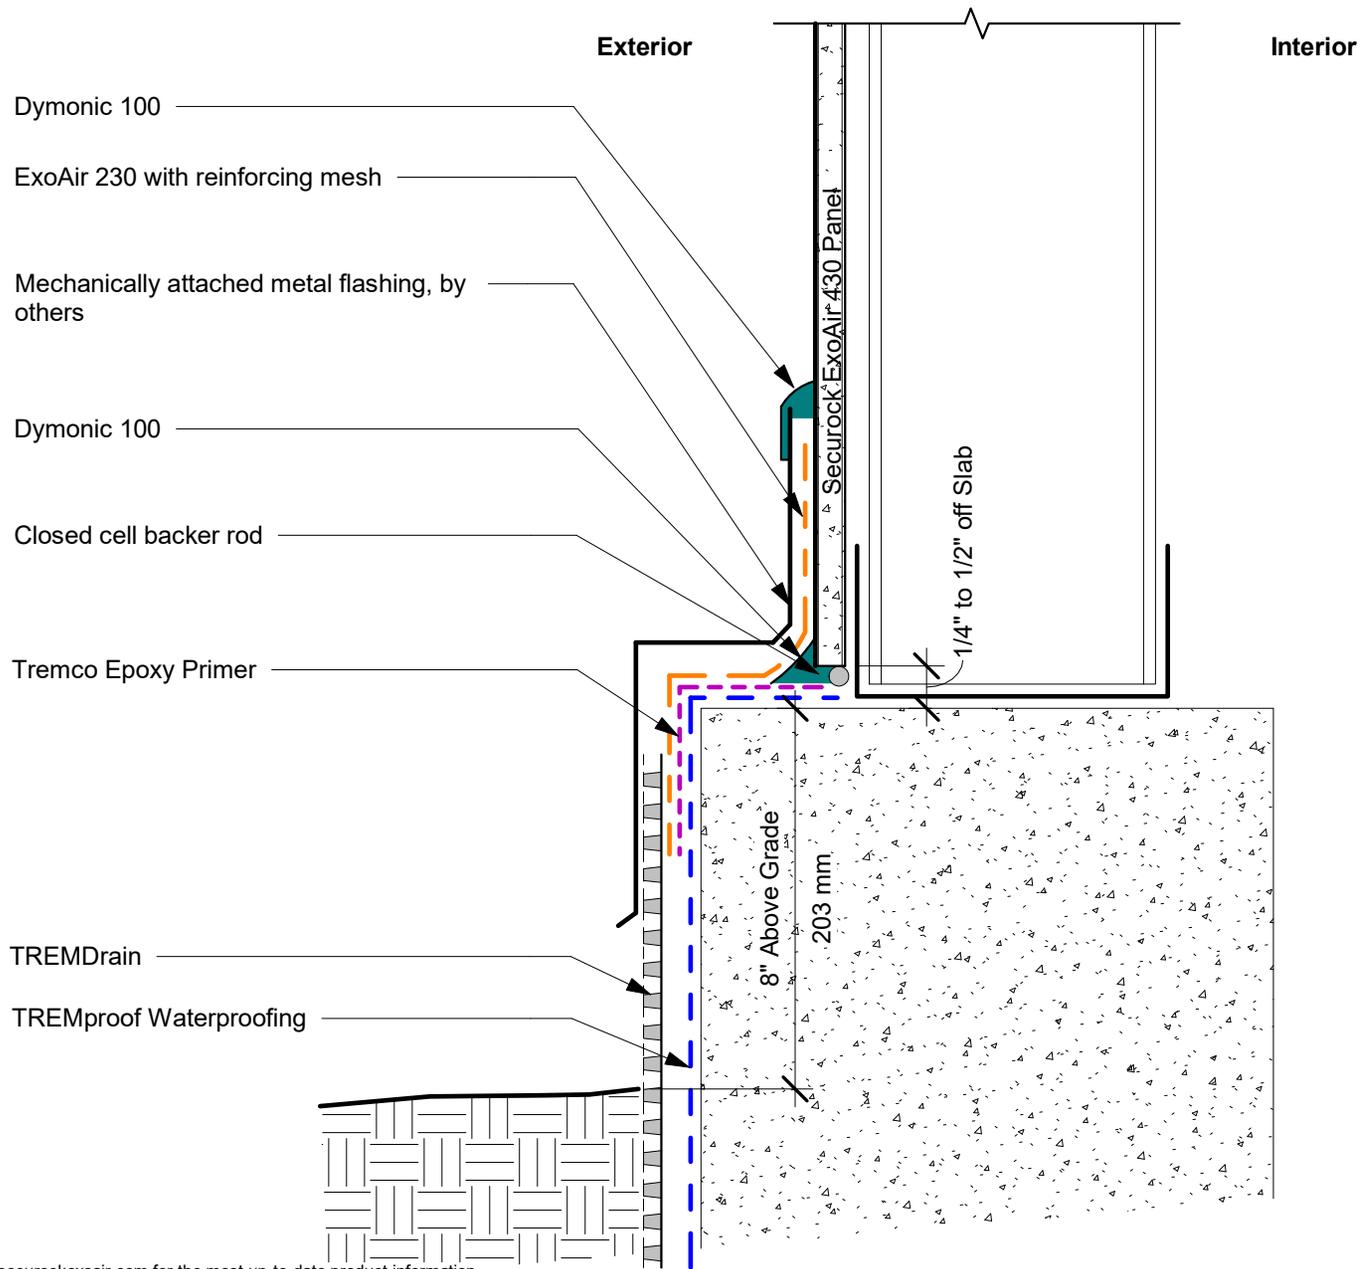

**NOTES:**


- Minimum 3" overlap required for all dissimilar materials and/or change in plane
- Install reinforcing mesh with 70 wet mils of ExoAir 230, completely covering reinforcing mesh

See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.*

The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.

The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.

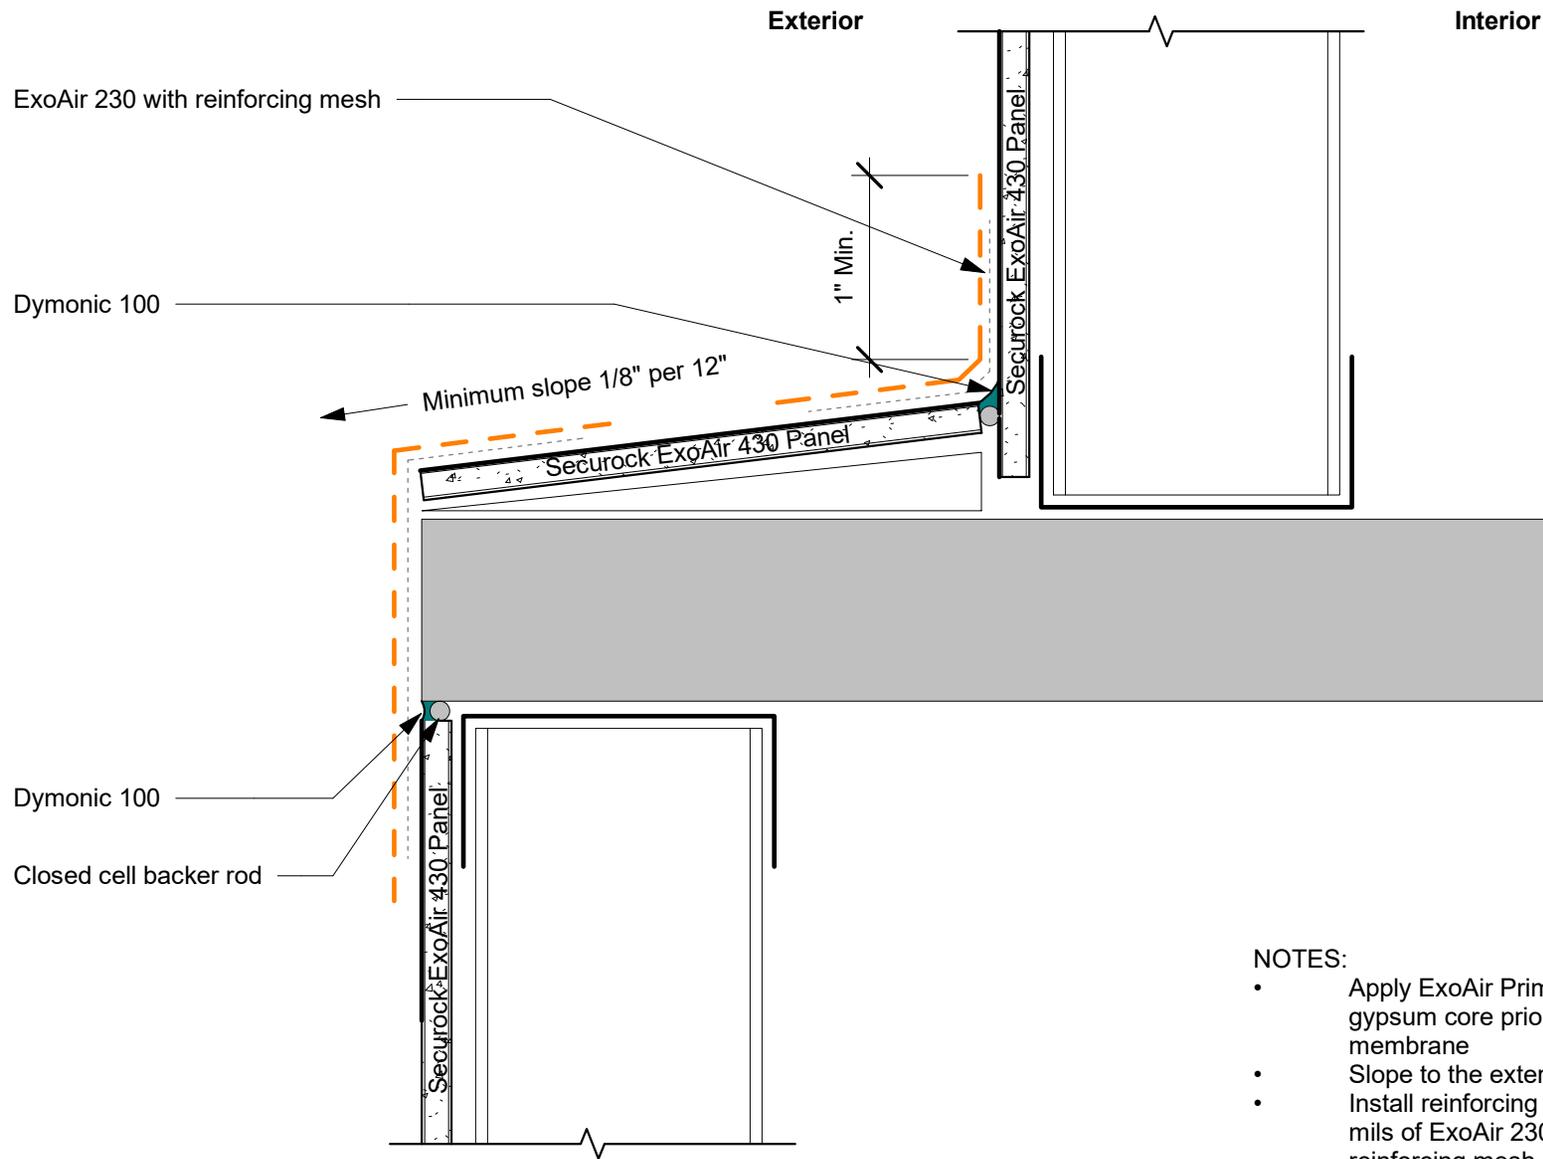

**NOTES:**

- Apply ExoAir Primer to all exposed gypsum core prior to application of membrane
- Slope to the exterior 1/8" per 12"
- Install reinforcing mesh with 70 wet mils of ExoAir 230, completely covering reinforcing mesh

See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.*

*The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.*

*The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.*



**United States Gypsum Company**  
550 West Adams Street  
Chicago, IL 60661

USG Technical & Customer Support:  
800.USG.4YOU (874-4968)

**Tremco Commercial Sealants & Waterproofing**  
3735 Green Road  
Beachwood, OH 44122


Tremco Technical Support:  
866.209.2404

Offset Application

Scale: 3" = 1'-0"

Rev. No.	Rev. Date
1	03.07.2018

12789

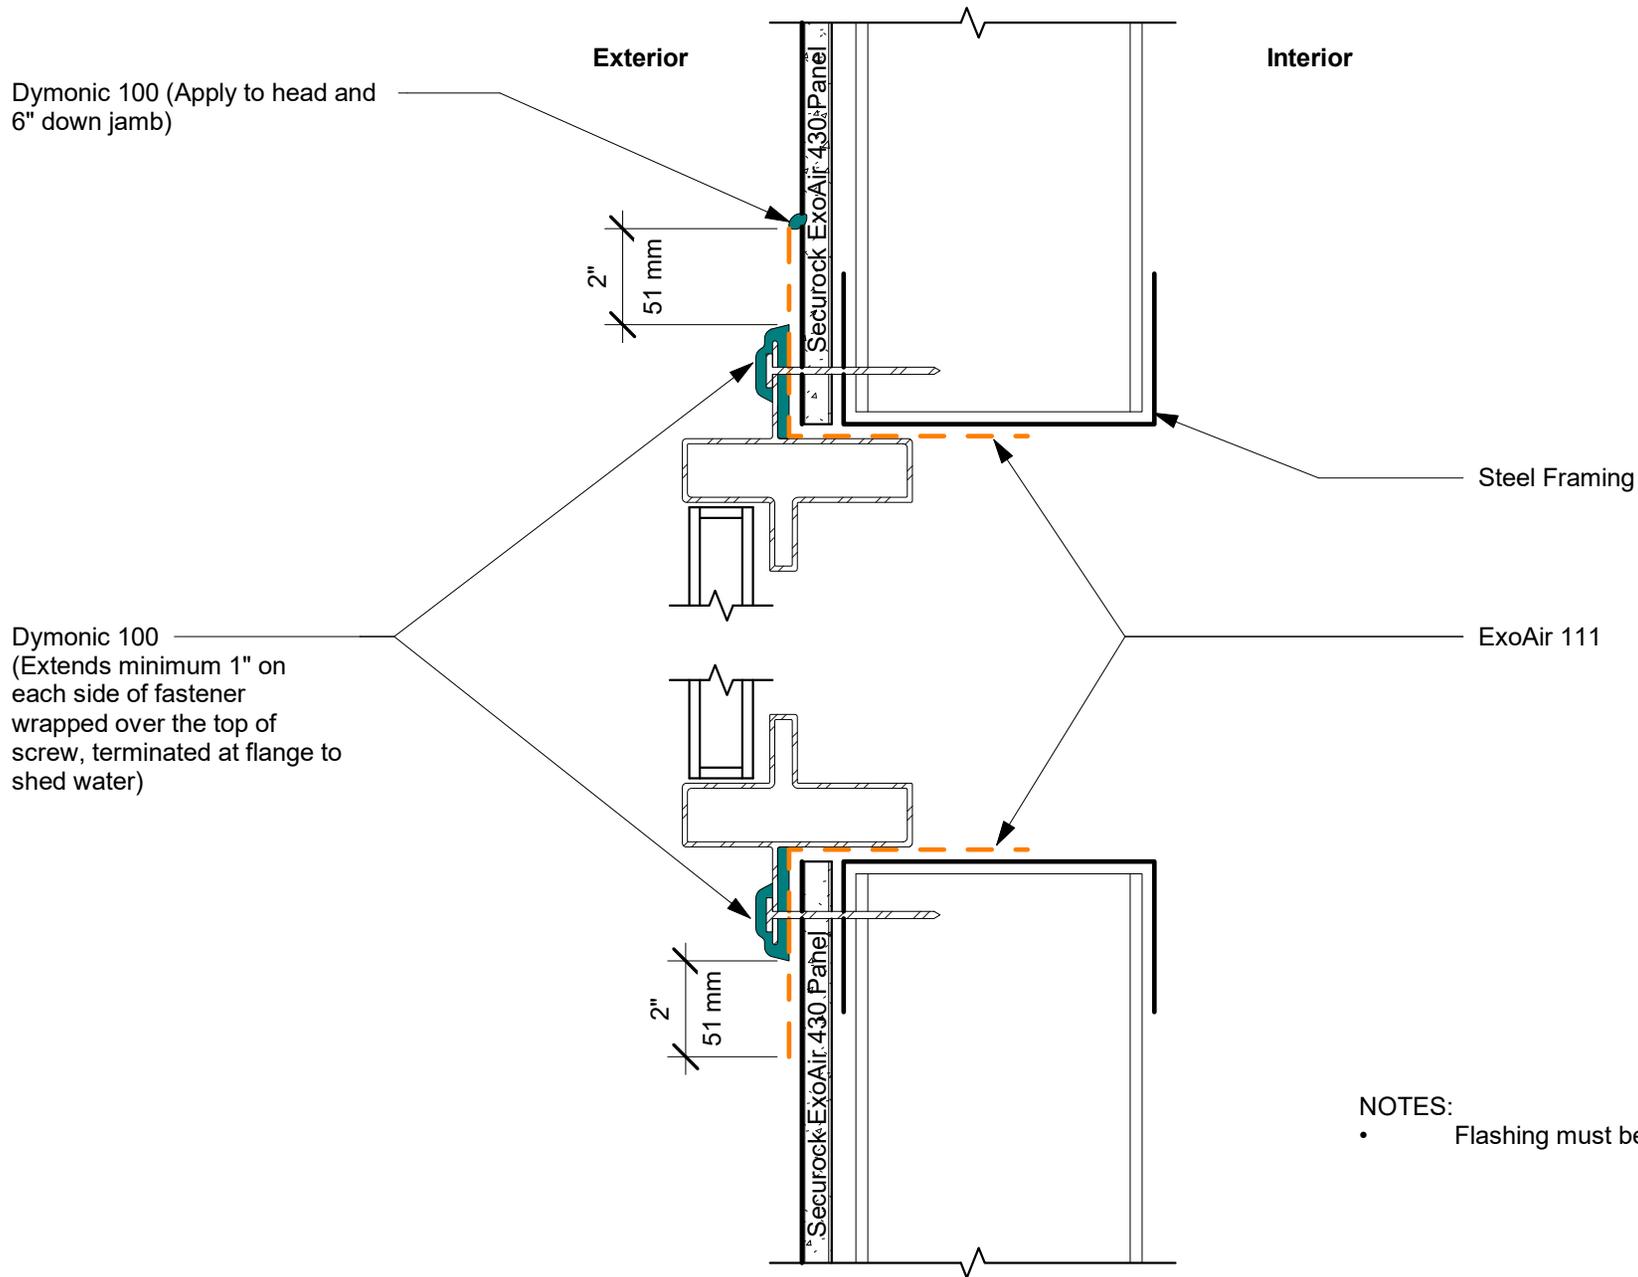

NOTES:


- Flashing must be installed past thermal break

See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.

This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.

The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.

The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.

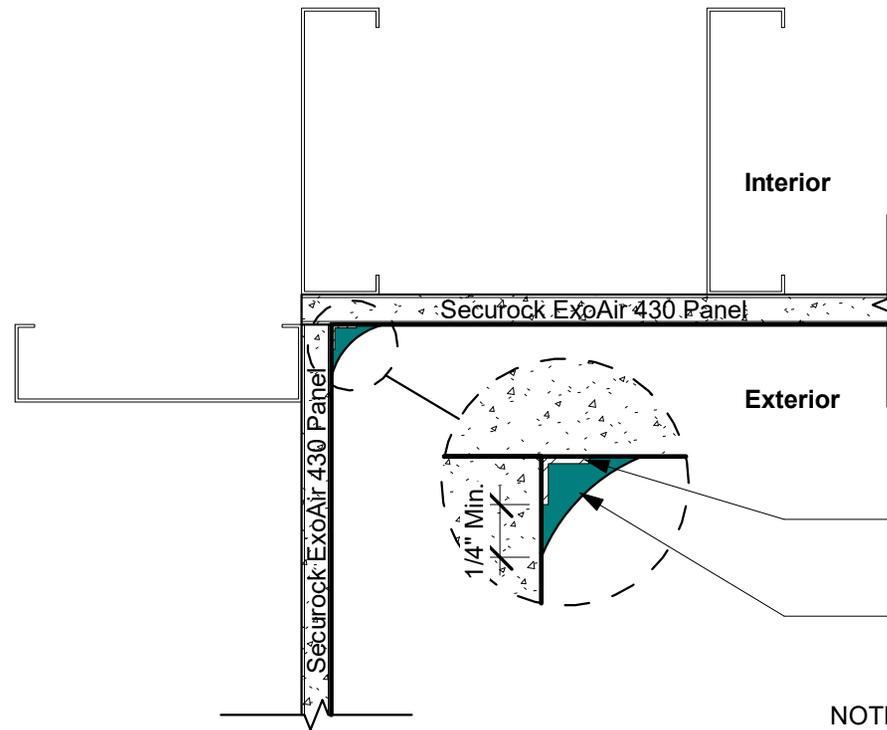

Minimum 1/2" wide bond breaker tape (e.g. polyethylene tape) centered on joint

Dymonic 100

**NOTES:**

- Spectrem 1 is an alternative to Dymonic 100, but cannot be used with an adhesively applied facade

See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.


*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.*

The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.

The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.

 <p><b>USG CGC TREMCO</b></p> <p>PERFORMANCE BUILT IN</p>	<p><b>United States Gypsum Company</b> 550 West Adams Street Chicago, IL 60661</p> <p>USG Technical &amp; Customer Support: 800.USG.4YOU (874-4968)</p>	<p><b>Tremco Commercial Sealants &amp; Waterproofing</b> 3735 Green Road Beachwood, OH 44122</p> <p>Tremco Technical Support: 866.209.2404</p>	<p>Inside Corner</p>	<p>Rev. No.    Rev. Date</p>
	<p>Scale: 3" = 1'-0"</p>			<p>12885</p>

ExoAir 230 at 50 wet mils with reinforcing mesh

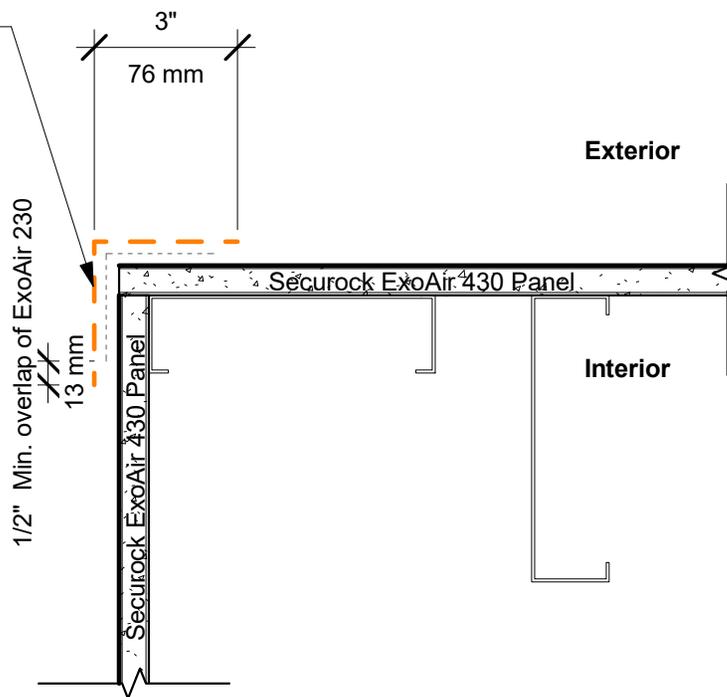

**NOTES:**

- Minimum 3 1/2" overlap required for all dissimilar materials and/or change in plane
- Install reinforcing mesh with 50 wet mils of ExoAir 230, completely covering reinforcing mesh

See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.*

*The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.*

*The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.*



**United States Gypsum Company**  
550 West Adams Street  
Chicago, IL 60661

USG Technical & Customer Support:  
800.USG.4YOU (874-4968)

**Tremco Commercial Sealants & Waterproofing**  
3735 Green Road  
Beachwood, OH 44122

Tremco Technical Support:  
866.209.2404


Outside Corner - Fluid-Applied Flashing

Scale: 3" = 1'-0"

Rev. No. Rev. Date

12886

Dymonic 100, minimum 1/4" contact on surface of pipe and face of panel

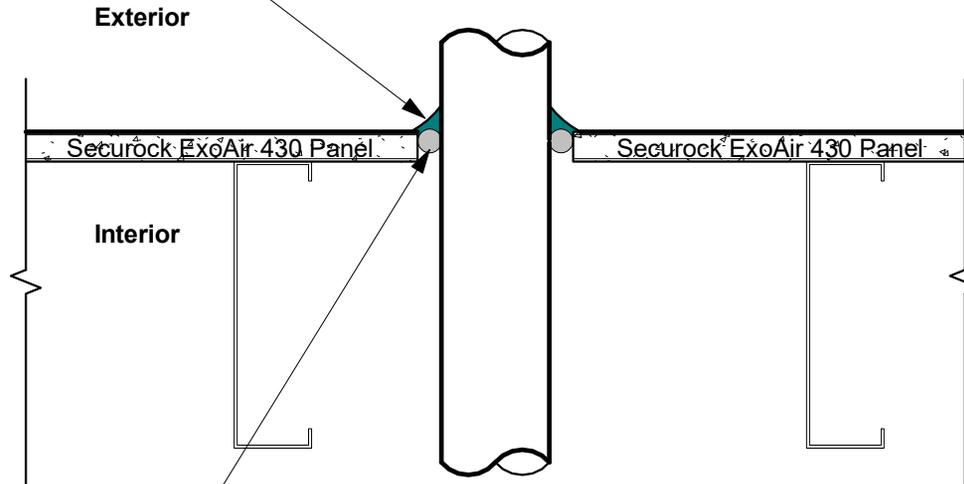

ExoAir LEF or closed cell backer rod

**NOTES:**

- Spectrem 1 is an alternate to Dymonic 100, but cannot be used with an adhesively applied cladding
- No backing required at conditions with 0-1/4" of annular space

See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.*

*The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.*

*The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.*



**United States Gypsum Company**  
550 West Adams Street  
Chicago, IL 60661

USG Technical & Customer Support:  
800.USG.4YOU (874-4968)

**Tremco Commercial Sealants & Waterproofing**  
3735 Green Road  
Beachwood, OH 44122


Tremco Technical Support:  
866.209.2404

Non-Rated Wall Penetration

Scale: 3" = 1'-0"

Rev. No. Rev. Date

12887

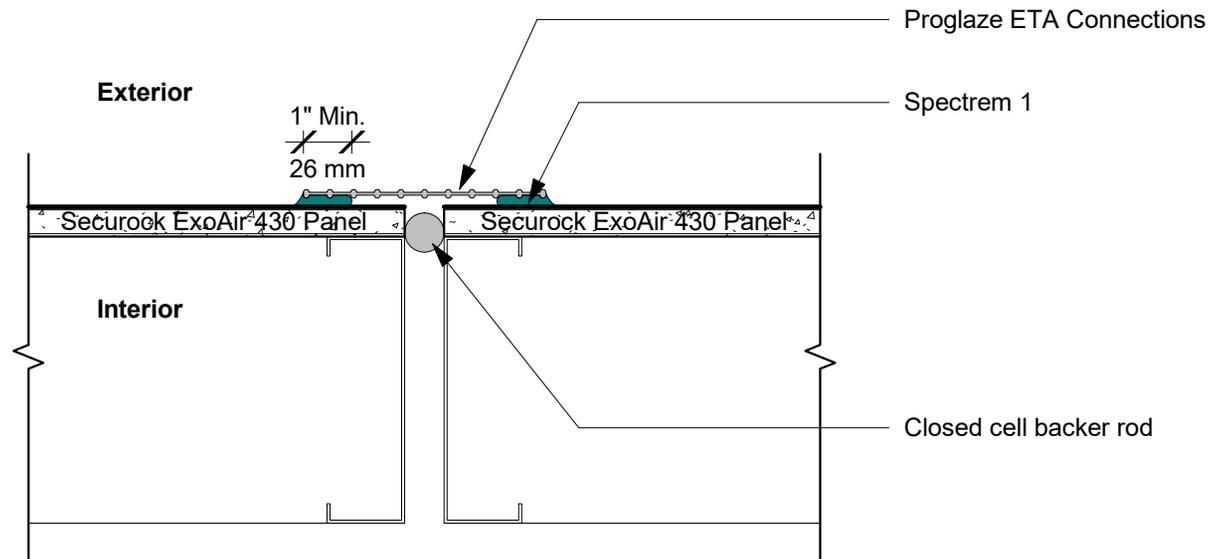

**NOTES:**


- Each edge of the Proglaze ETA Connections set in 1" minimum bead of Spectrem 1 silicone sealant - refer to application instructions for more detail on installation
- Width of Proglaze ETA Connections determined by width of joint/gap and anticipated movement
- 3" Overlap sealed with Spectrem 1 for Proglaze ETA Connections splicing, applied in proper shingle effect
- Should not be used with adhesively attached cladding

See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.*

The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.

The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.

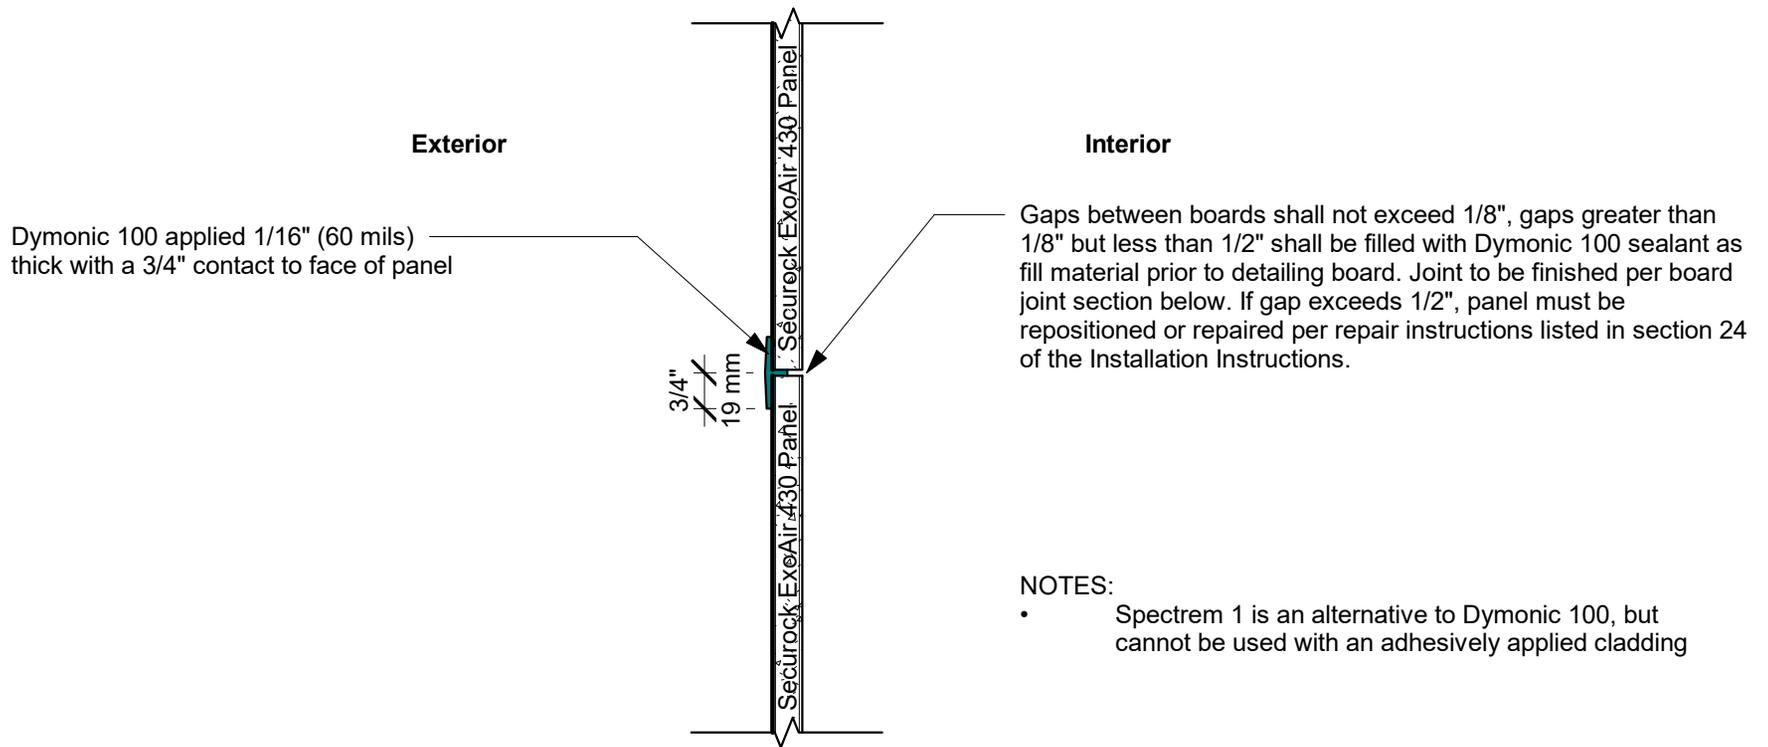

Dymonic 100 applied 1/16" (60 mils) thick with a 3/4" contact to face of panel

Gaps between boards shall not exceed 1/8", gaps greater than 1/8" but less than 1/2" shall be filled with Dymonic 100 sealant as fill material prior to detailing board. Joint to be finished per board joint section below. If gap exceeds 1/2", panel must be repositioned or repaired per repair instructions listed in section 24 of the Installation Instructions.


- NOTES:
- Spectrem 1 is an alternative to Dymonic 100, but cannot be used with an adhesively applied cladding

See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.

This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.

The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters. The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.

 <p><b>USG CGC TREMCO</b></p> <p>PERFORMANCE BUILT IN</p>	<p><b>United States Gypsum Company</b> 550 West Adams Street Chicago, IL 60661</p> <p>USG Technical &amp; Customer Support: 800.USG.4YOU (874-4968)</p>	<p><b>Tremco Commercial Sealants &amp; Waterproofing</b> 3735 Green Road Beachwood, OH 44122</p> <p>Tremco Technical Support: 866.209.2404</p>	<p><b>Board Joint</b></p>	<p>Rev. No.    Rev. Date</p>
	<p>Scale: 3" = 1'-0"</p>			<p><b>12969</b></p>

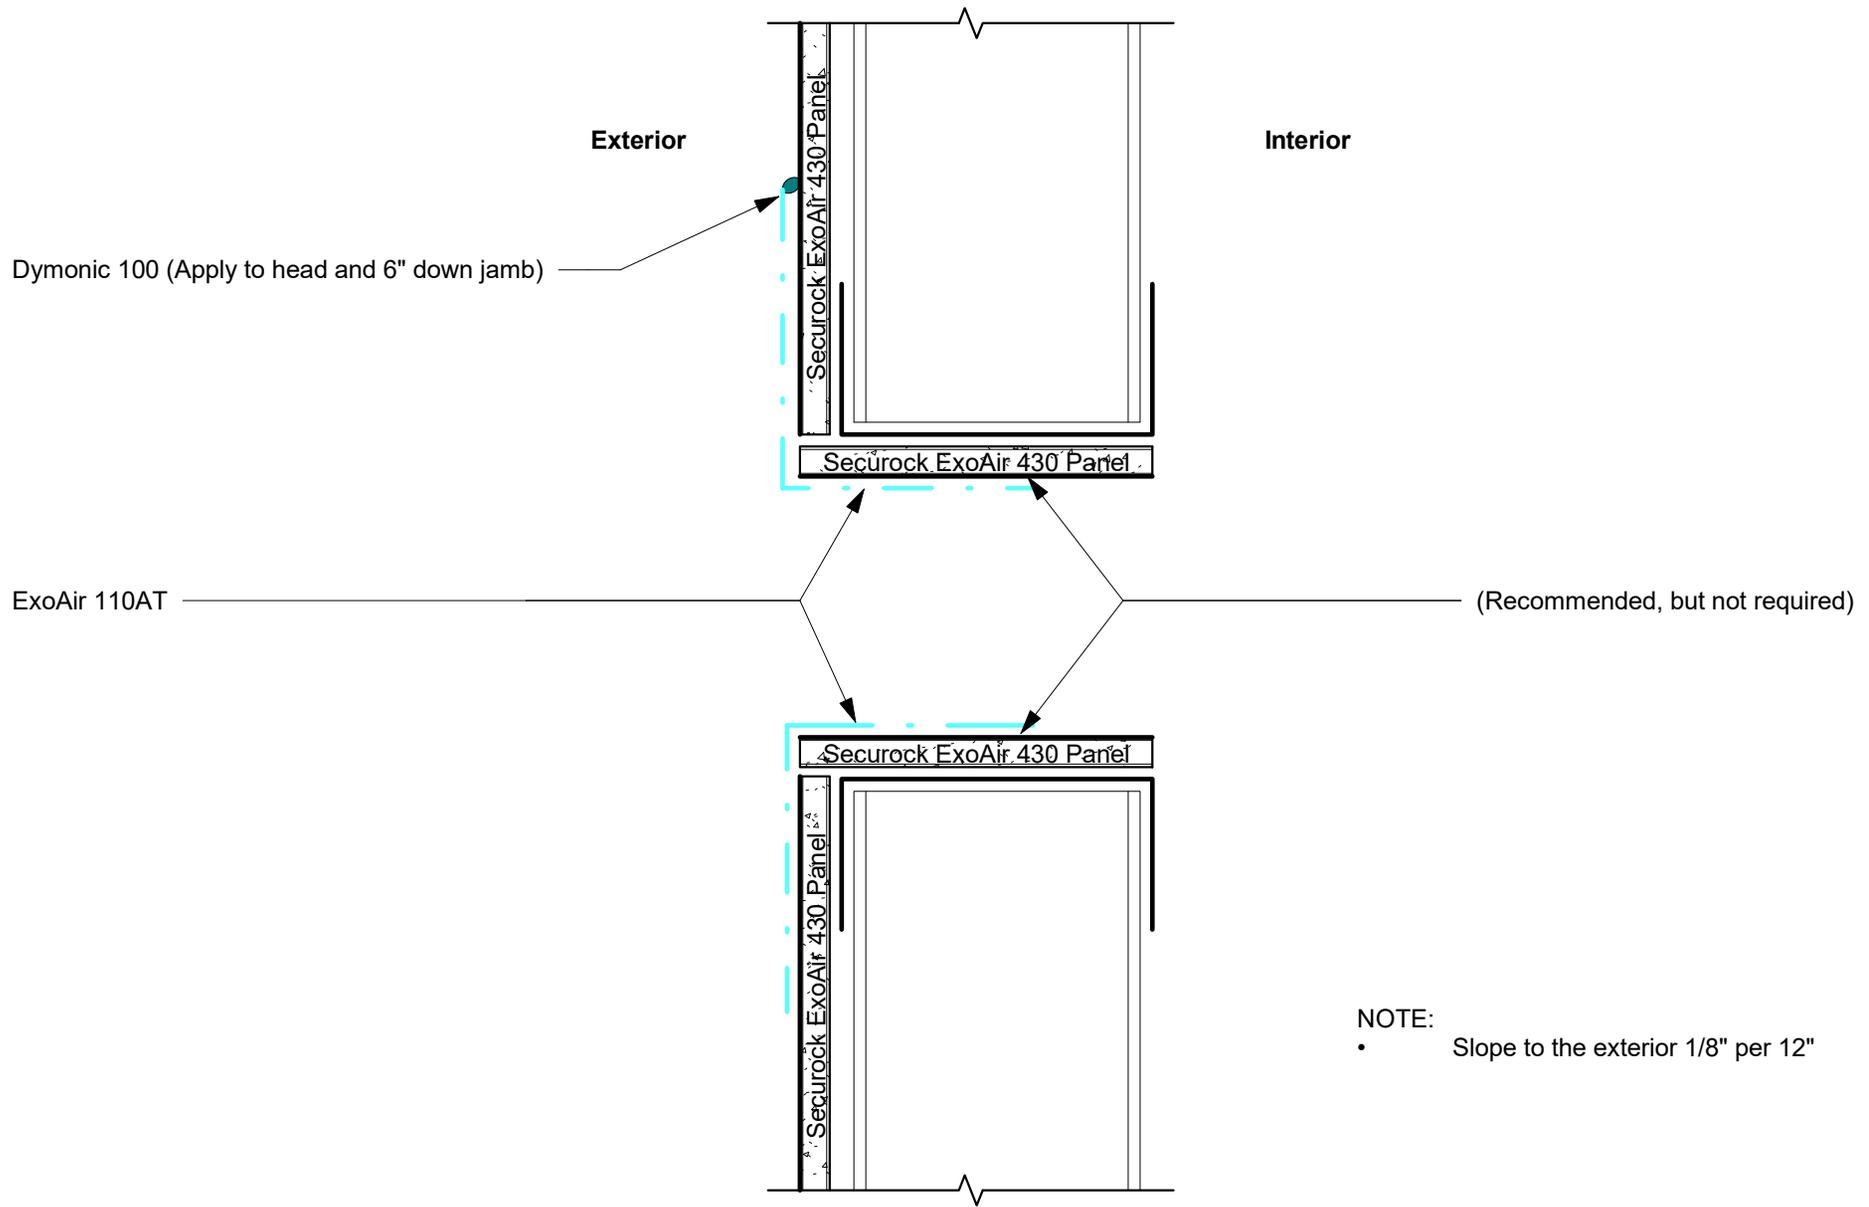

**NOTE:**

- Slope to the exterior 1/8" per 12"


See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.*

*The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.*

*The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.*

 <p><b>PERFORMANCE BUILT IN</b></p>	<p><b>United States Gypsum Company</b> 550 West Adams Street Chicago, IL 60661</p> <p>USG Technical &amp; Customer Support: 800.USG.4YOU (874-4968)</p>	<p><b>Tremco Commercial Sealants &amp; Waterproofing</b> 3735 Green Road Beachwood, OH 44122</p> <p>Tremco Technical Support: 866.209.2404</p>	<p>Rough Opening - ExoAir 110AT - Panel</p>	<p>Rev. No.    Rev. Date</p>
	<p>Scale: 3" = 1'-0"</p>			<p><b>13010</b></p>

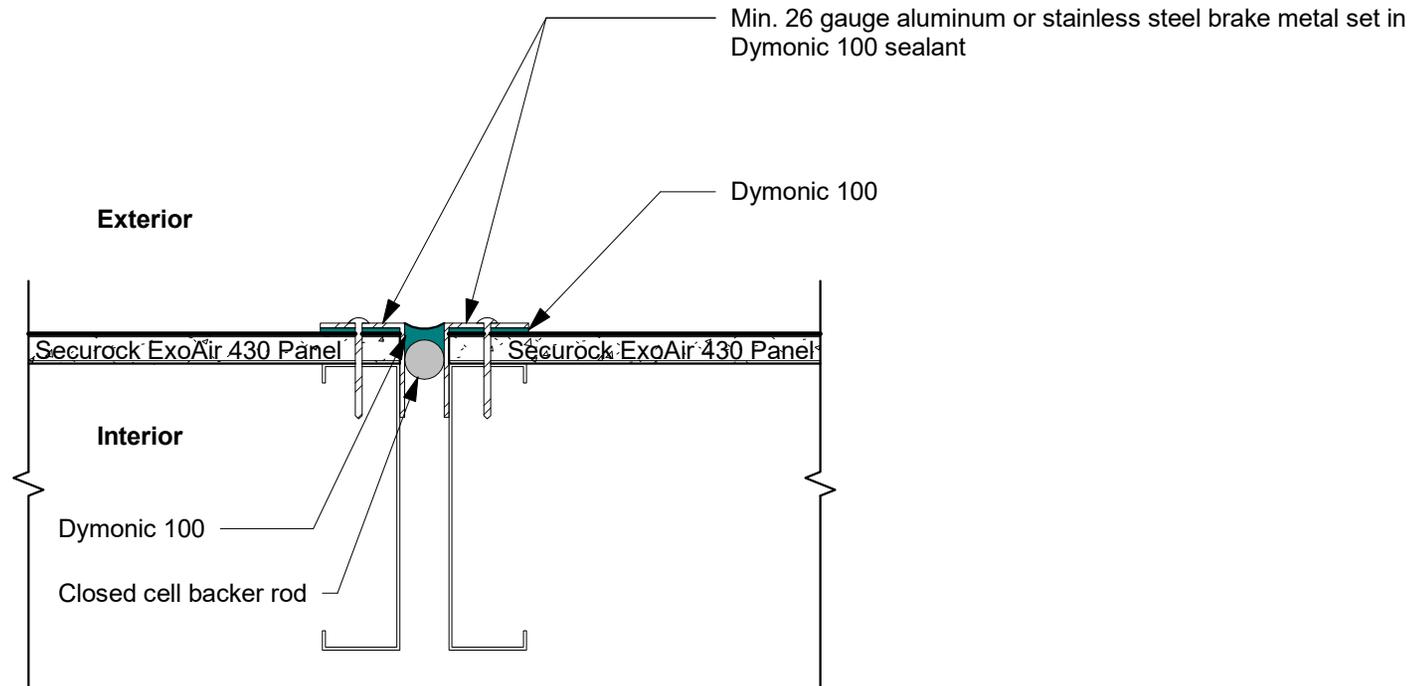

**NOTES:**

- For joints wider than 1" contact your Tremco Technical Sales Representative
- Brake metal to be 1"x1" on each substrate, standard flashing gauge
- When lapping brake metal, sections must overlap 3" in shingle fashion

See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.*

*The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.*

*The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.*



**United States Gypsum Company**  
550 West Adams Street  
Chicago, IL 60661

USG Technical & Customer Support:  
800.USG.4YOU (874-4968)

**Tremco Commercial Sealants & Waterproofing**  
3735 Green Road  
Beachwood, OH 44122


Tremco Technical Support:  
866.209.2404

Expansion Control Joint - Brake Metal

Scale: 3" = 1'-0"

Rev. No. Rev. Date

13127

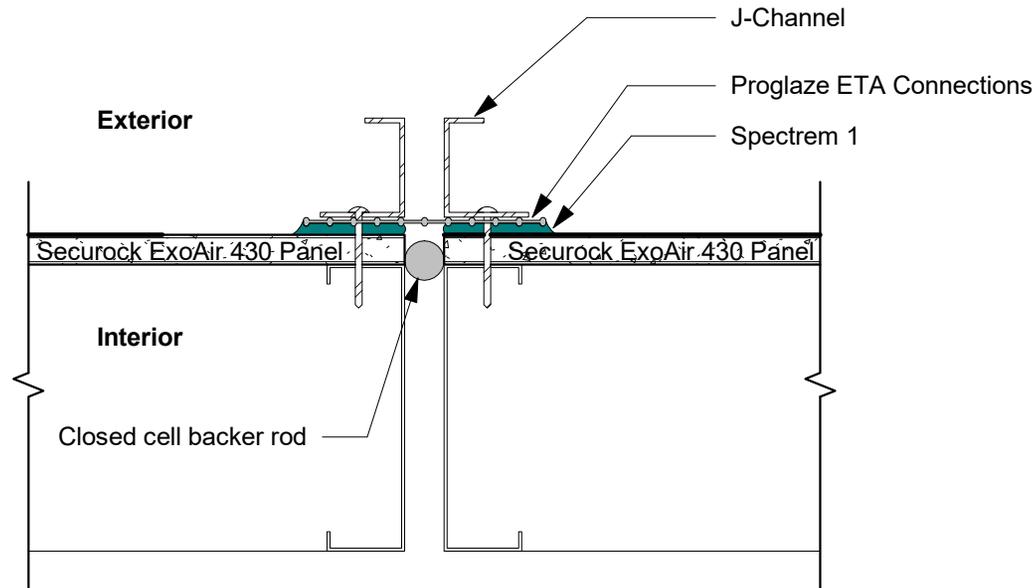

**NOTES:**

- Proglaze ETA Connections completely set in bed of Spectrem 1 silicone sealant - refer to application instructions for more detail on installation
- Width of Proglaze ETA Connections determined by width of joint/gap and anticipated movement
- 3" Overlap sealed with Spectrem 1 for Proglaze ETA Connections splicing, applied in proper shingle effect
- Should not be used with adhesively attached cladding


See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.*

*The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.*

*The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.*

 <p><b>USG CGC TREMCO</b> PERFORMANCE BUILT IN</p>	<p><b>United States Gypsum Company</b> 550 West Adams Street Chicago, IL 60661</p> <p>USG Technical &amp; Customer Support: 800.USG.4YOU (874-4968)</p>	<p><b>Tremco Commercial Sealants &amp; Waterproofing</b> 3735 Green Road Beachwood, OH 44122</p> <p>Tremco Technical Support: 866.209.2404</p>	<p>Expansion Control Joint - Mechanically Fastened Trim</p>	<p>Rev. No.    Rev. Date</p>
	<p>Scale: 3" = 1'-0"</p>			<p><b>13128</b></p>

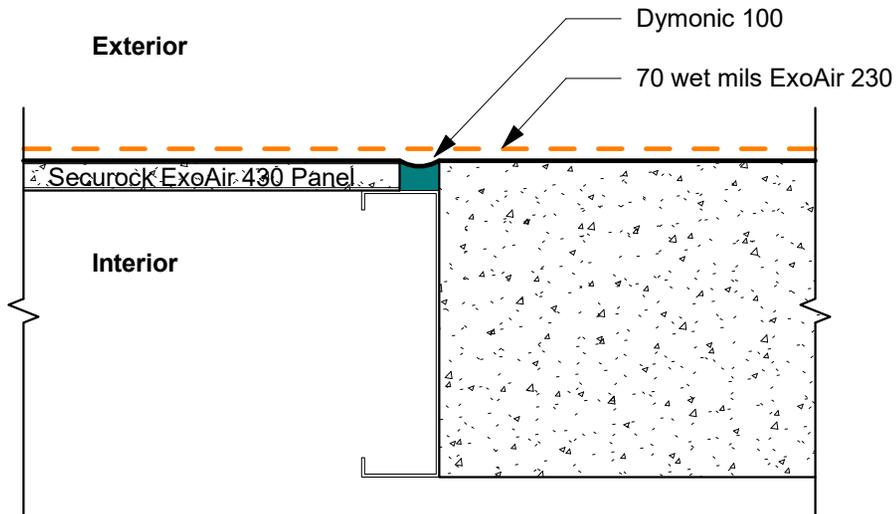

**NOTES:**

- Minimum 3" overlap required for all dissimilar materials and/or change in plane
- For joints wider than 1" contact your Tremco Technical Services Representative


See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.*

*The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.*

*The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.*

 <p><b>PERFORMANCE BUILT IN</b></p>	<p><b>United States Gypsum Company</b> 550 West Adams Street Chicago, IL 60661</p> <p>USG Technical &amp; Customer Support: 800.USG.4YOU (874-4968)</p>	<p><b>Tremco Commercial Sealants &amp; Waterproofing</b> 3735 Green Road Beachwood, OH 44122</p> <p>Tremco Technical Support: 866.209.2404</p>	<p>Adjacent Substrates</p>	<p>Rev. No.    Rev. Date</p>
	<p>Scale: 3" = 1'-0"</p>			<p><b>13577</b></p>

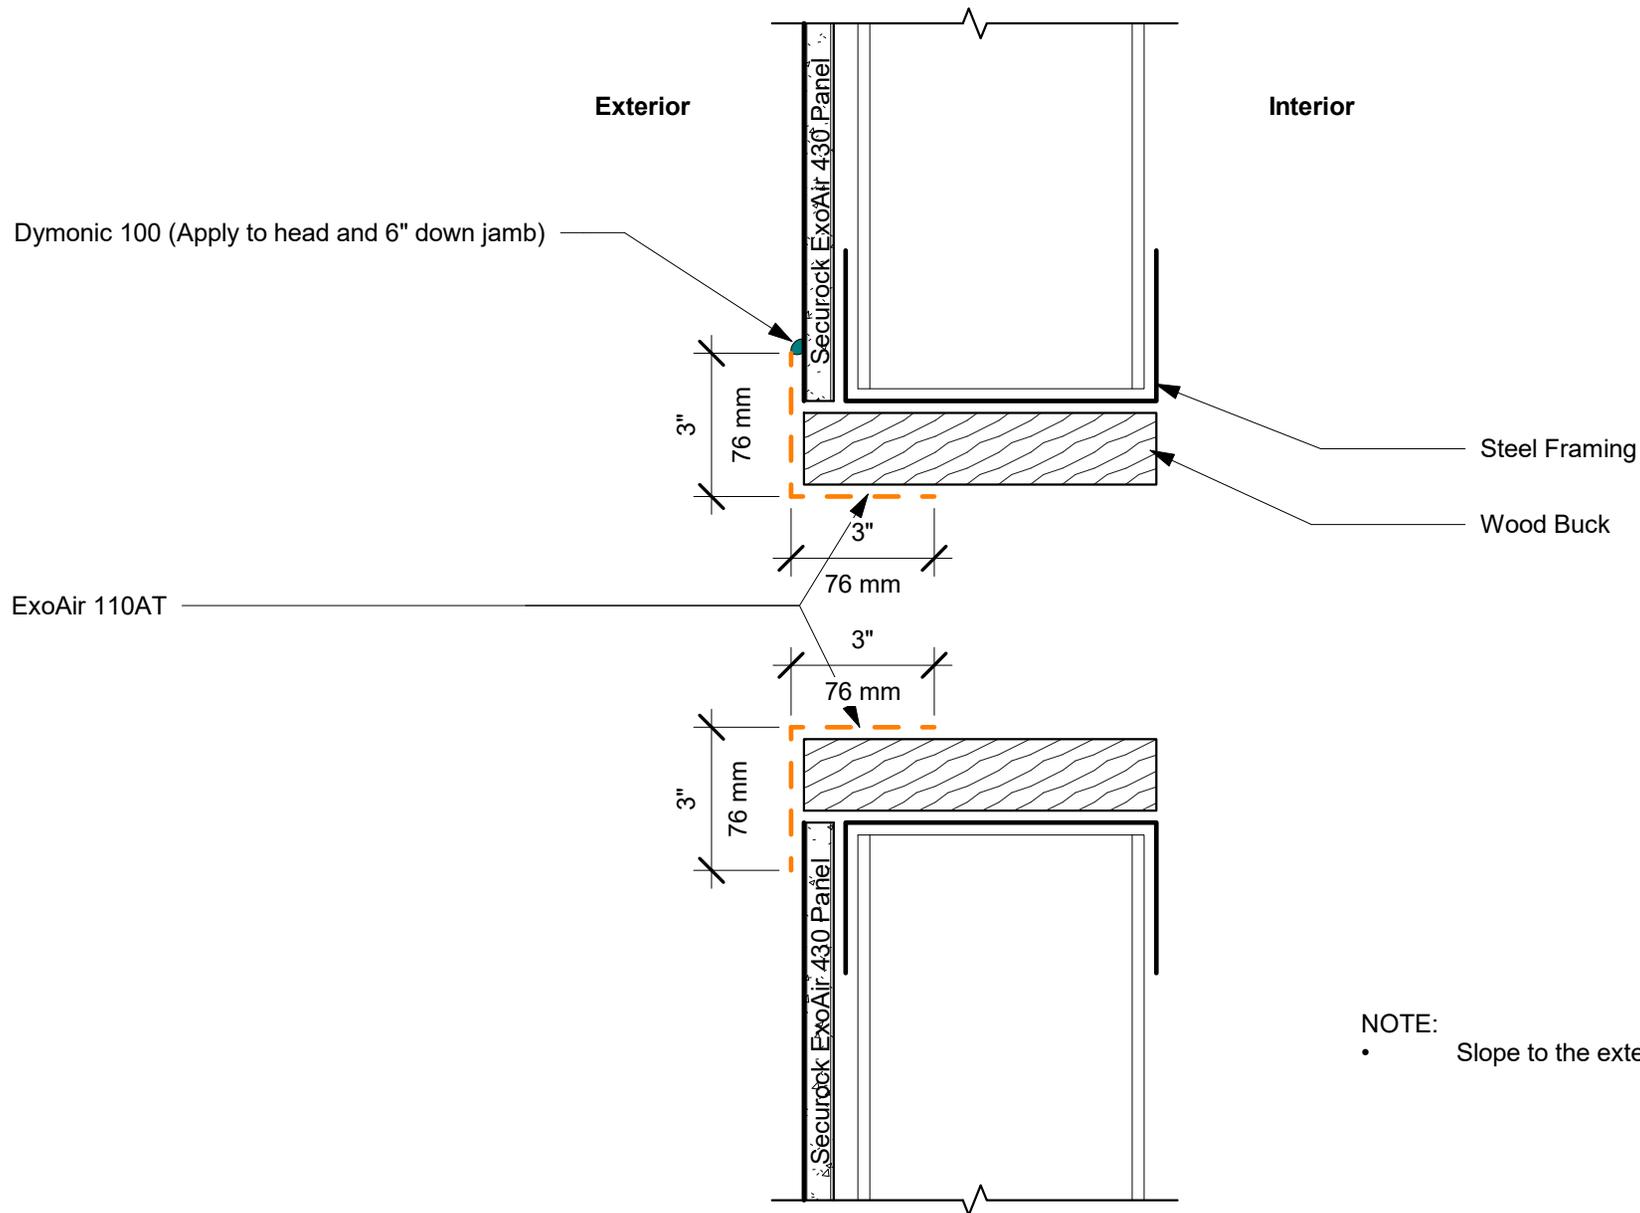

NOTE:  
 • Slope to the exterior 1/8" per 12"

See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.*

The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.  
 The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.



**United States Gypsum Company**  
 550 West Adams Street  
 Chicago, IL 60661  
 USG Technical & Customer Support:  
 800.USG.4YOU (874-4968)


**Tremco Commercial Sealants & Waterproofing**  
 3735 Green Road  
 Beachwood, OH 44122  
 Tremco Technical Support:  
 866.209.2404

Rough Opening - ExoAir 110AT - Wood Buck

Scale: 3" = 1'-0"

Rev. No. Rev. Date

13683

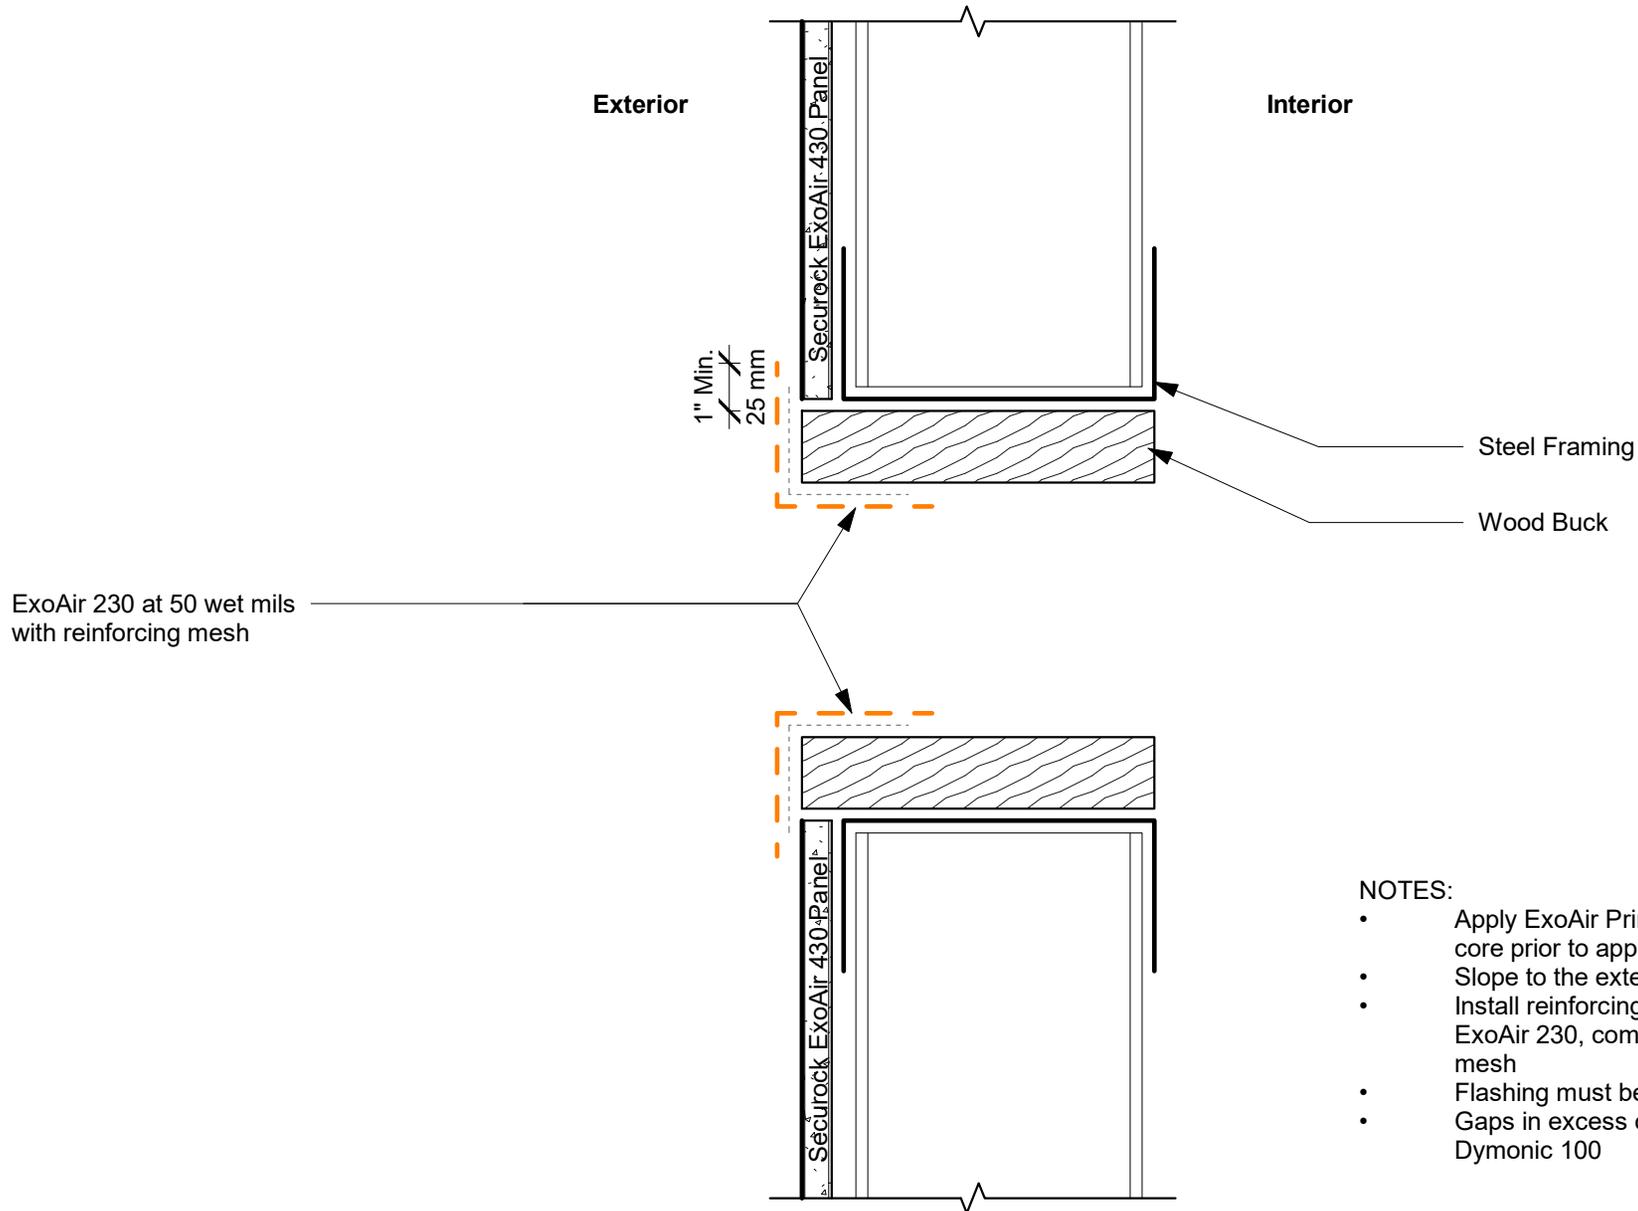

ExoAir 230 at 50 wet mils with reinforcing mesh

**NOTES:**


- Apply ExoAir Primer to all exposed gypsum core prior to application of membrane
- Slope to the exterior 1/8" per 12"
- Install reinforcing mesh with 50 wet mils of ExoAir 230, completely covering reinforcing mesh
- Flashing must be installed past thermal break
- Gaps in excess of 1/8" must be detailed with Dymonic 100

See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.*

The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.

The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.

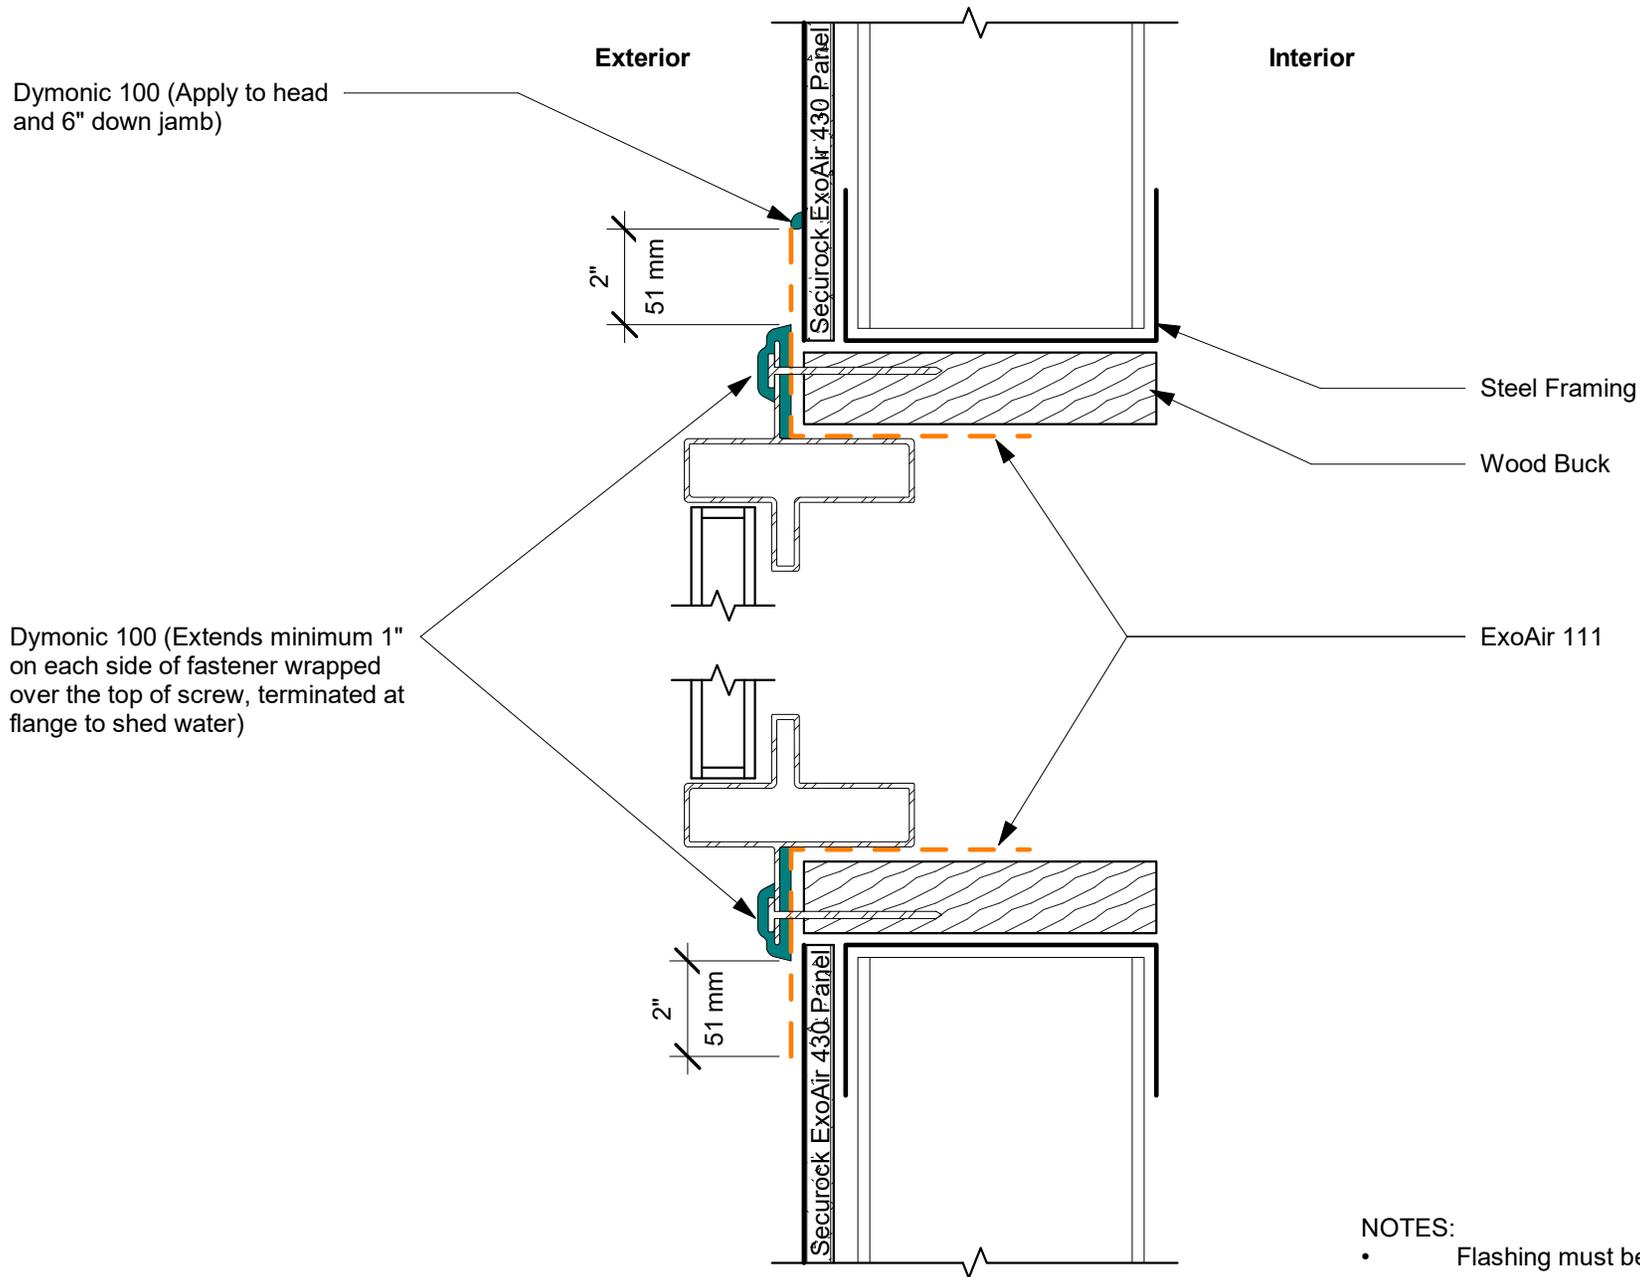


- NOTES:
- Flashing must be installed past thermal break

See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.*

The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.

The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.

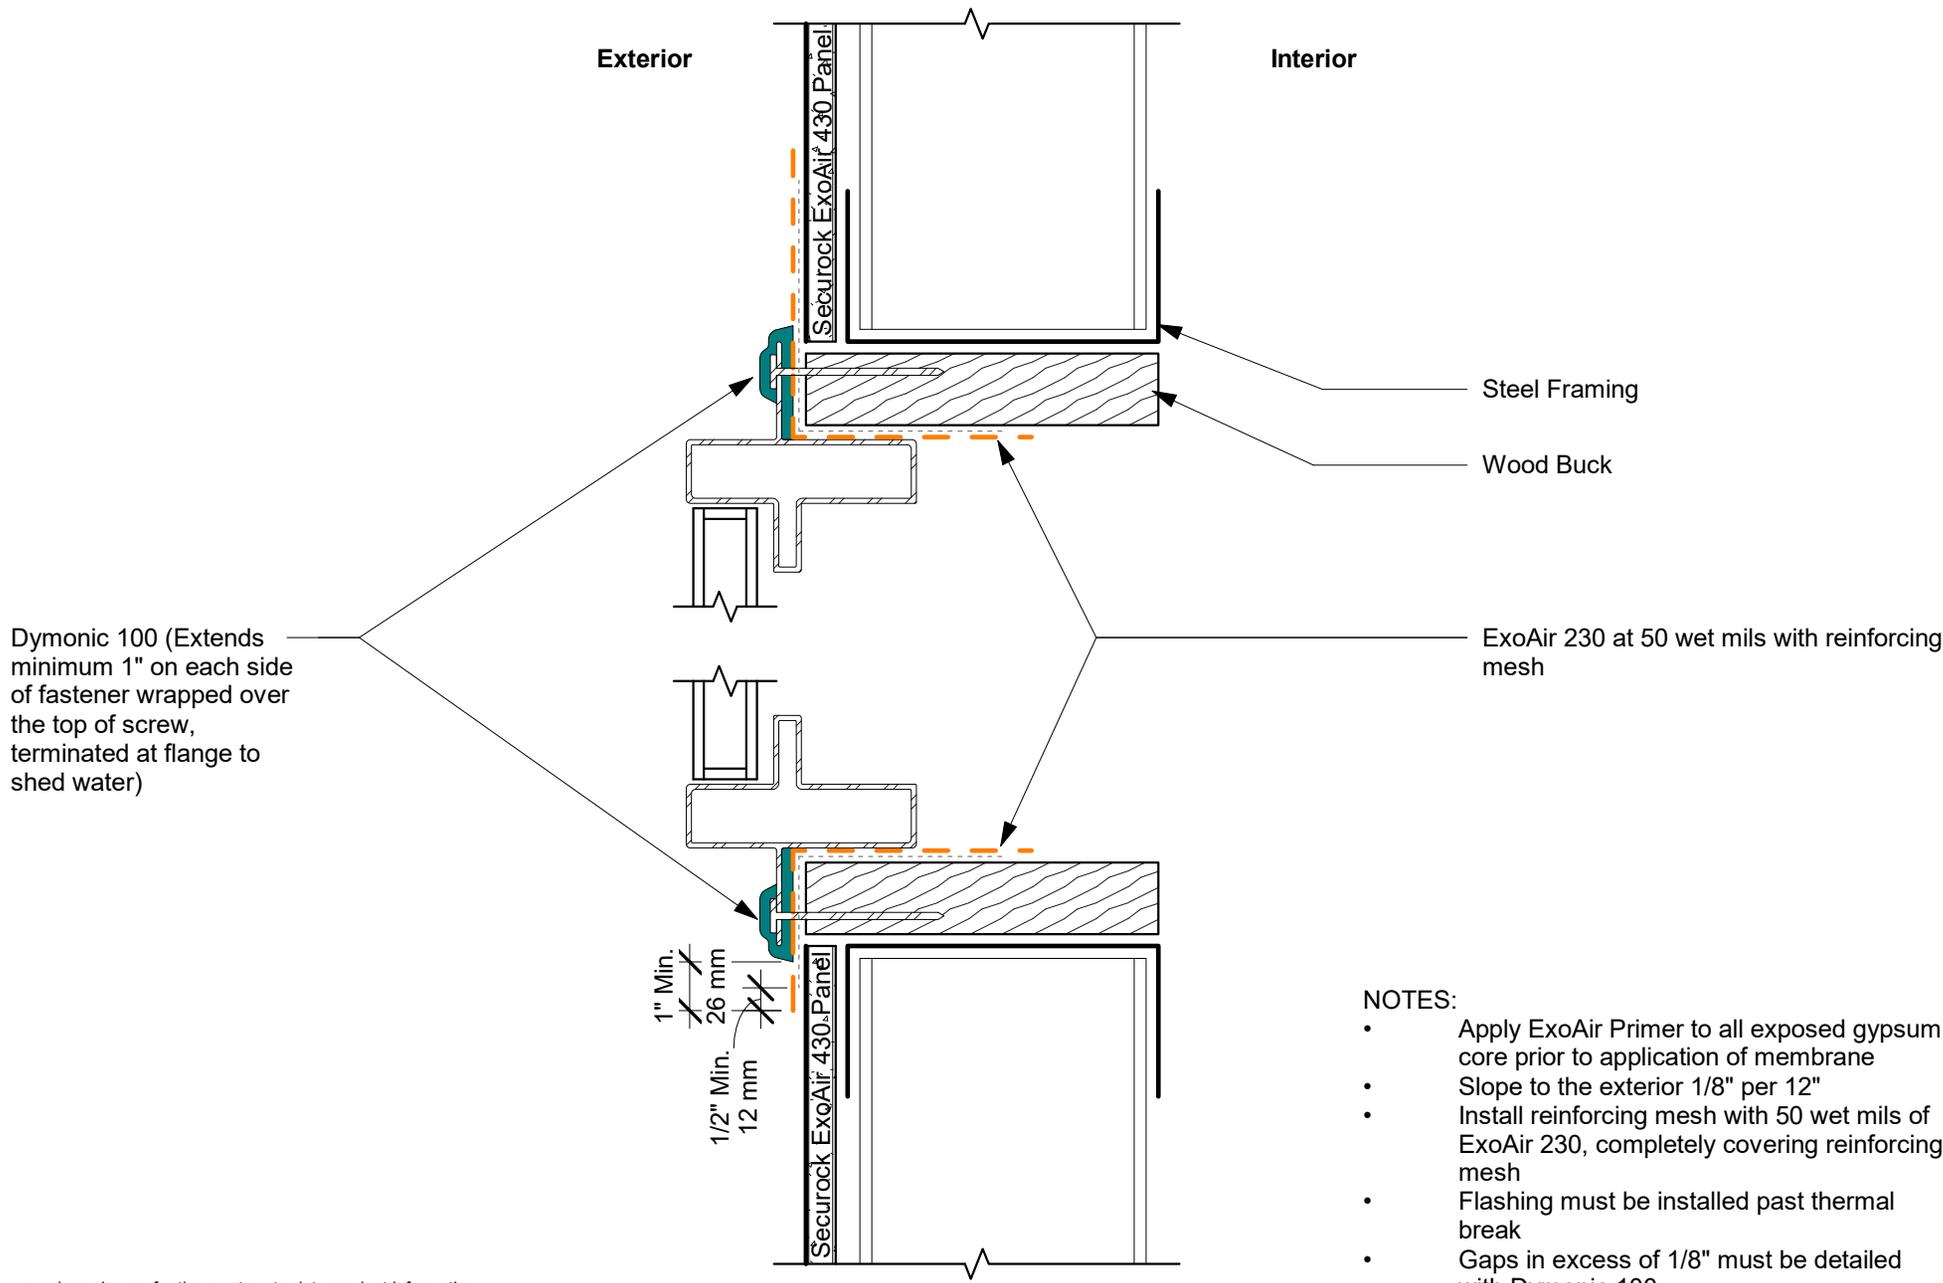

Dymonic 100 (Extends minimum 1" on each side of fastener wrapped over the top of screw, terminated at flange to shed water)

Steel Framing

Wood Buck

ExoAir 230 at 50 wet mils with reinforcing mesh

1" Min.  
26 mm  
1/2" Min.  
12 mm

- NOTES:**
- Apply ExoAir Primer to all exposed gypsum core prior to application of membrane
  - Slope to the exterior 1/8" per 12"
  - Install reinforcing mesh with 50 wet mils of ExoAir 230, completely covering reinforcing mesh
  - Flashing must be installed past thermal break
  - Gaps in excess of 1/8" must be detailed with Dymonic 100

See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.*

The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.  
The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.




**United States Gypsum Company**  
550 West Adams Street  
Chicago, IL 60661  
  
USG Technical & Customer Support:  
800.USG.4YOU (874-4968)

**Tremco Commercial Sealants & Waterproofing**  
3735 Green Road  
Beachwood, OH 44122  
  
Tremco Technical Support:  
866.209.2404

Nail Flange - Fluid-Applied Flashing - Wood Buck  
  
Scale: 3" = 1'-0"

Rev. No.	Rev. Date
13686	

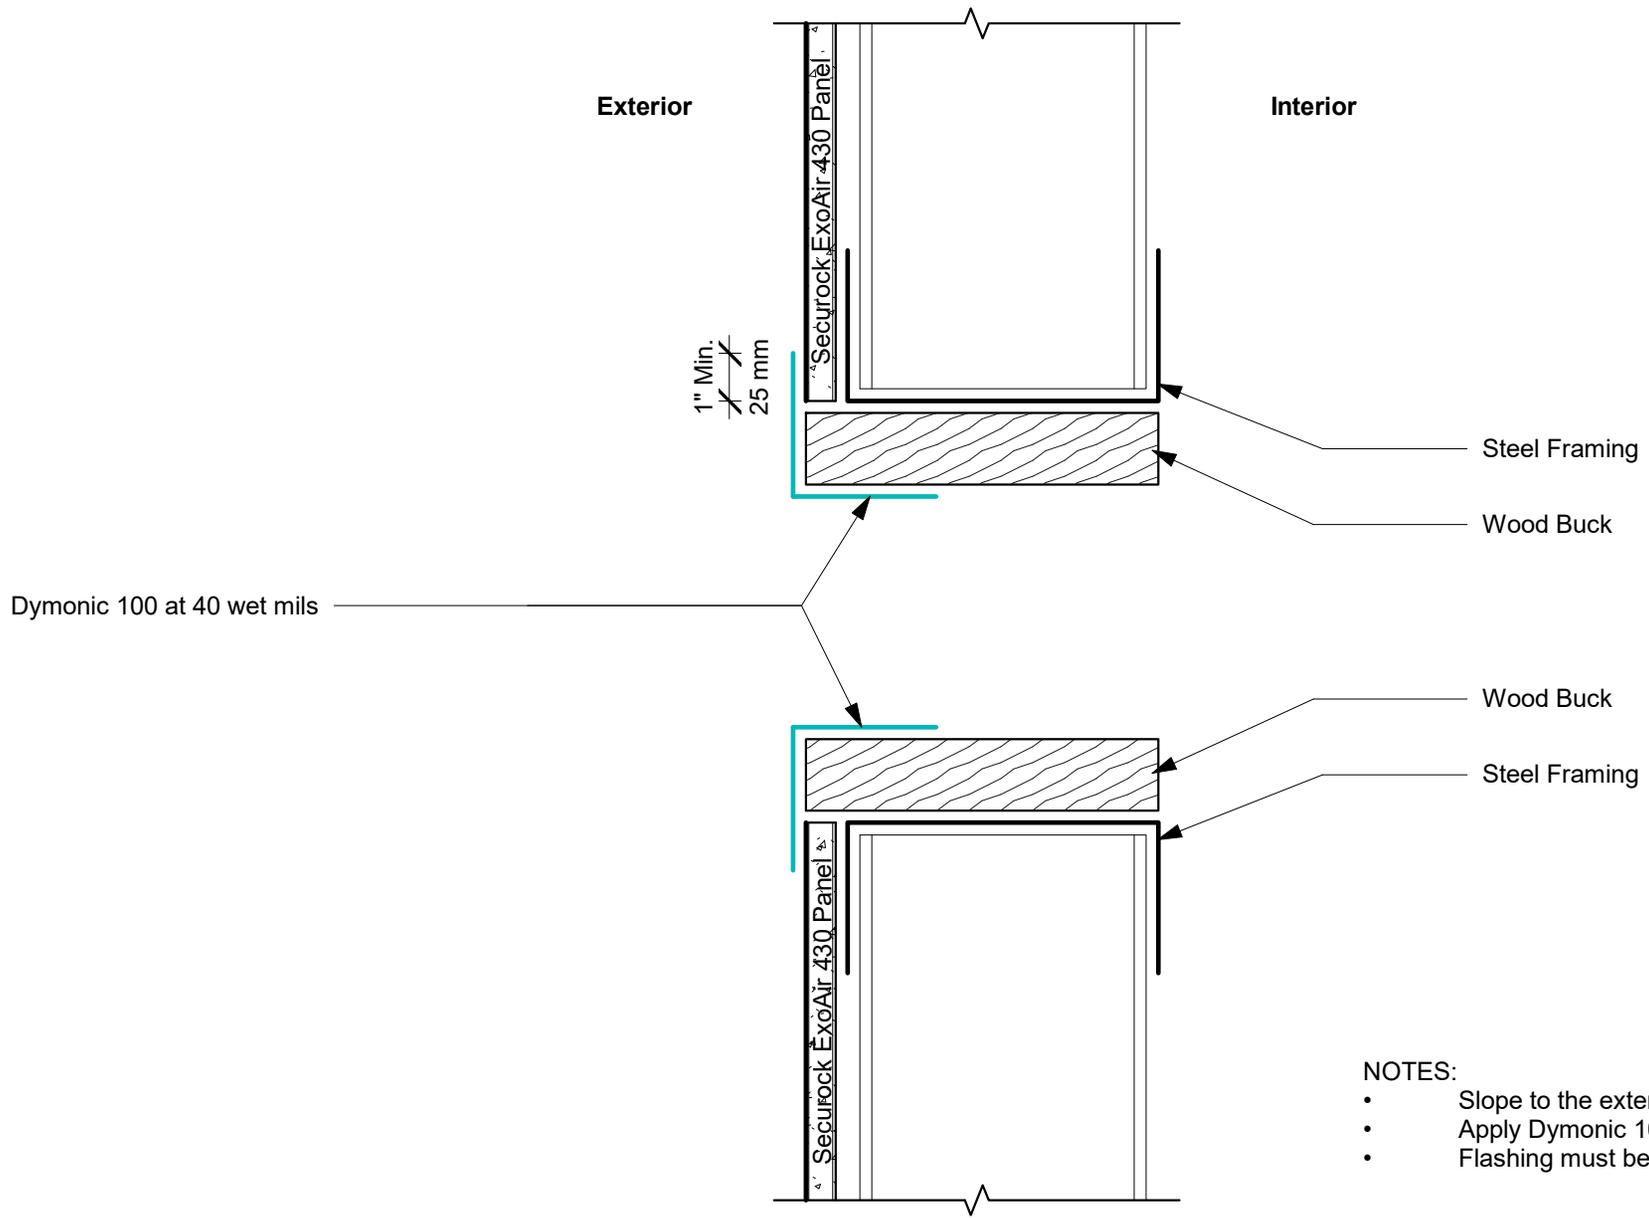

- NOTES:**
- Slope to the exterior 1/8" per 12"
  - Apply Dymonic 100 at 40 wet mils
  - Flashing must be installed past thermal break

See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.*

The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.  
 The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.



**United States Gypsum Company**  
 550 West Adams Street  
 Chicago, IL 60661  
 USG Technical & Customer Support:  
 800.USG.4YOU (874-4968)

**Tremco Commercial Sealants & Waterproofing**  
 3735 Green Road  
 Beachwood, OH 44122  
 Tremco Technical Support:  
 866.209.2404


Rough Opening - Dymonic 100 - Wood Buck  
 Scale: 3" = 1'-0"

Rev. No.	Rev. Date
14113	

Dymonic 100 (Extends minimum 1" on each side of fastener wrapped over the top of screw, terminated at flange to shed water)

1" Min.  
25 mm

1" Min.  
25 mm

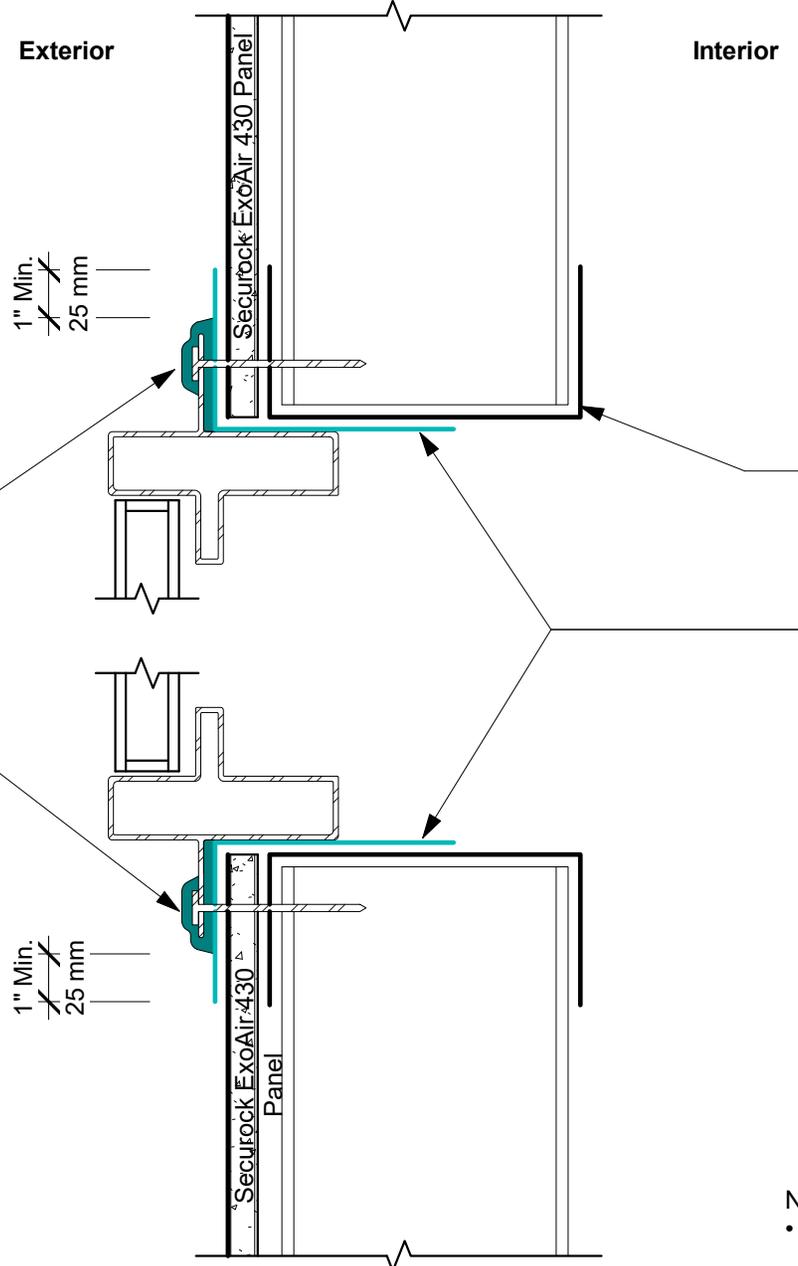

Steel Framing

Dymonic 100 at 40 wet mils

- NOTES:
- Flashing must be installed past thermal break

See [securorockexoair.com](http://securorockexoair.com) for the most up-to-date product information.

This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.

The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.  
 The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.




**United States Gypsum Company**  
 550 West Adams Street  
 Chicago, IL 60661  
 USG Technical & Customer Support:  
 800.USG.4YOU (874-4968)

**Tremco Commercial Sealants & Waterproofing**  
 3735 Green Road  
 Beachwood, OH 44122  
 Tremco Technical Support:  
 866.209.2404

**Nail Flange - Dymonic 100 - Framing**  
 Scale: 3" = 1'-0"

Rev. No.	Rev. Date
14114	

Dymonic 100 at 40 wet mils

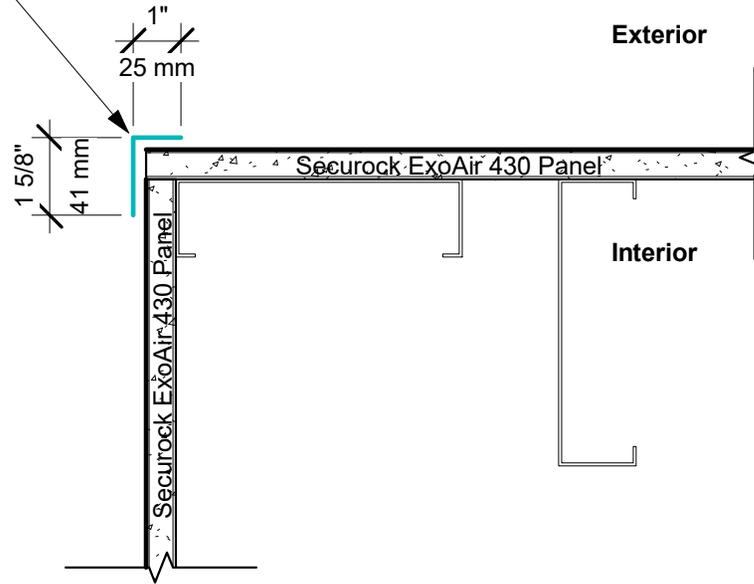

NOTES:

- Spectrem 1 is an alternative to Dymonic 100, but cannot be used with an adhesively applied cladding

See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.*

*The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.*

*The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.*



**United States Gypsum Company**  
550 West Adams Street  
Chicago, IL 60661

USG Technical & Customer Support:  
800.USG.4YOU (874-4968)

**Tremco Commercial Sealants & Waterproofing**  
3735 Green Road  
Beachwood, OH 44122

Tremco Technical Support:  
866.209.2404


Outside Corner - Dymonic 100

Scale: 3" = 1'-0"

Rev. No. Rev. Date

14115

Dymonic 100 (Extends minimum 1" on each side of fastener wrapped over the top of screw, terminated at flange to shed water)

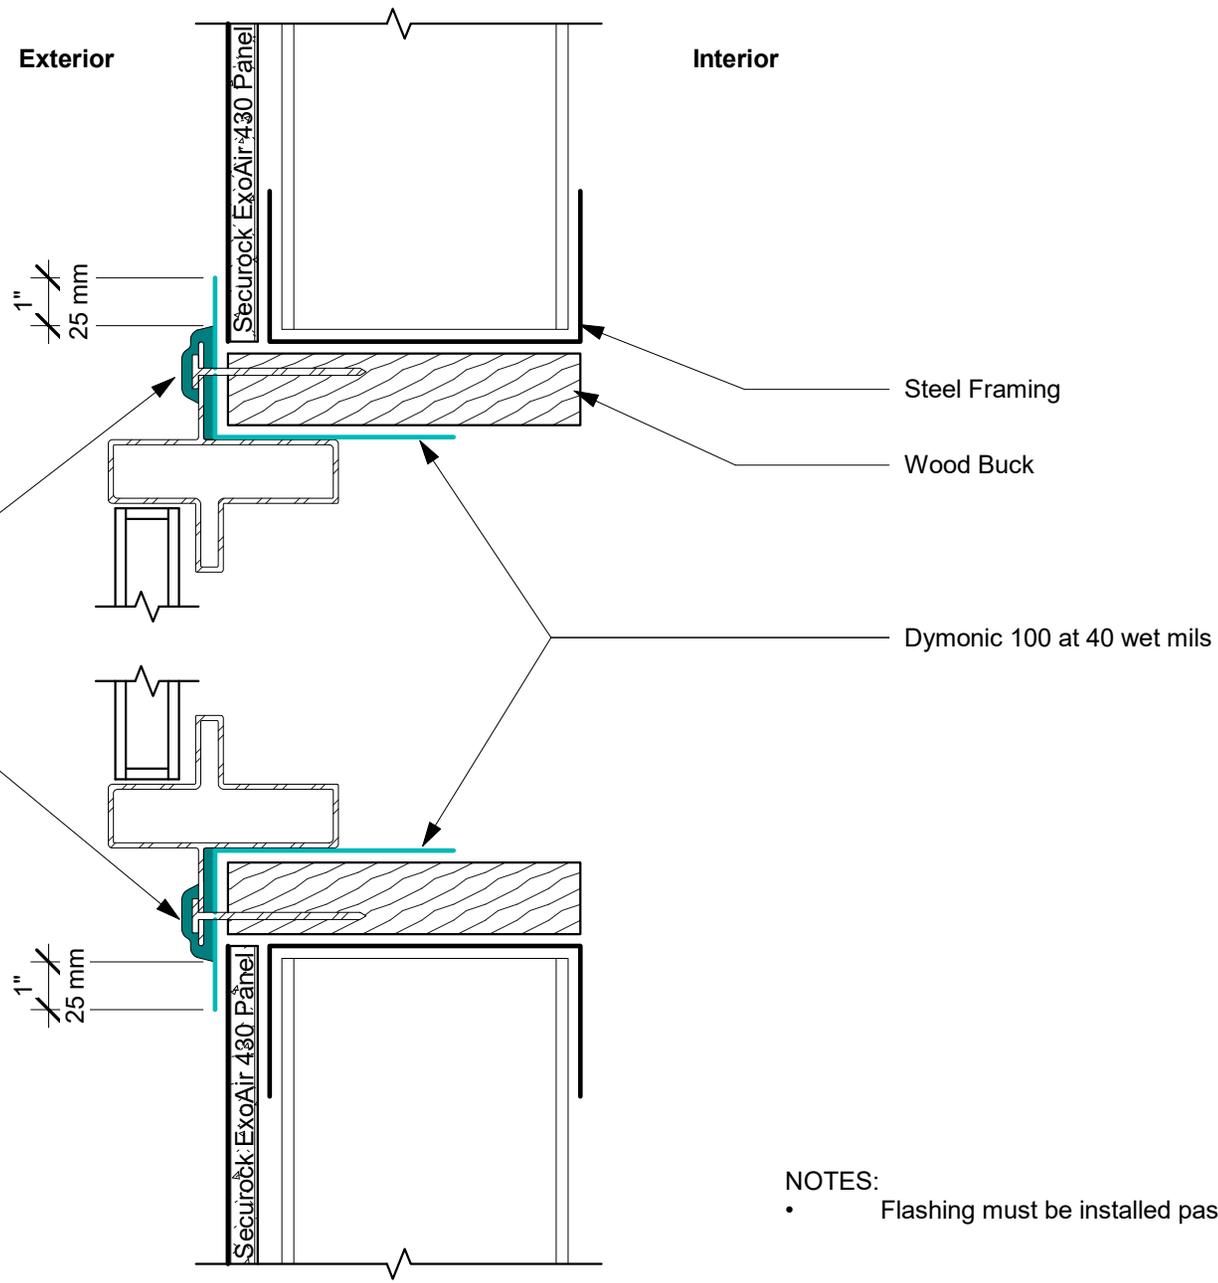


- NOTES:
- Flashing must be installed past thermal break

See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.

This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.

The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.  
 The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.

<p>PERFORMANCE BUILT IN</p>	<p><b>United States Gypsum Company</b>                  550 West Adams Street                  Chicago, IL 60661</p> <p>USG Technical &amp; Customer Support:                  800.USG.4YOU (874-4968)</p>	<p><b>Tremco Commercial Sealants &amp; Waterproofing</b>                  3735 Green Road                  Beachwood, OH 44122</p> <p>Tremco Technical Support:                  866.209.2404</p>	<p>Nail Flange - Dymonic 100 - Wood Buck</p>	<p>Rev. No.    Rev. Date</p>
	<p>Scale: 3" = 1'-0"</p>			<p>14133</p>

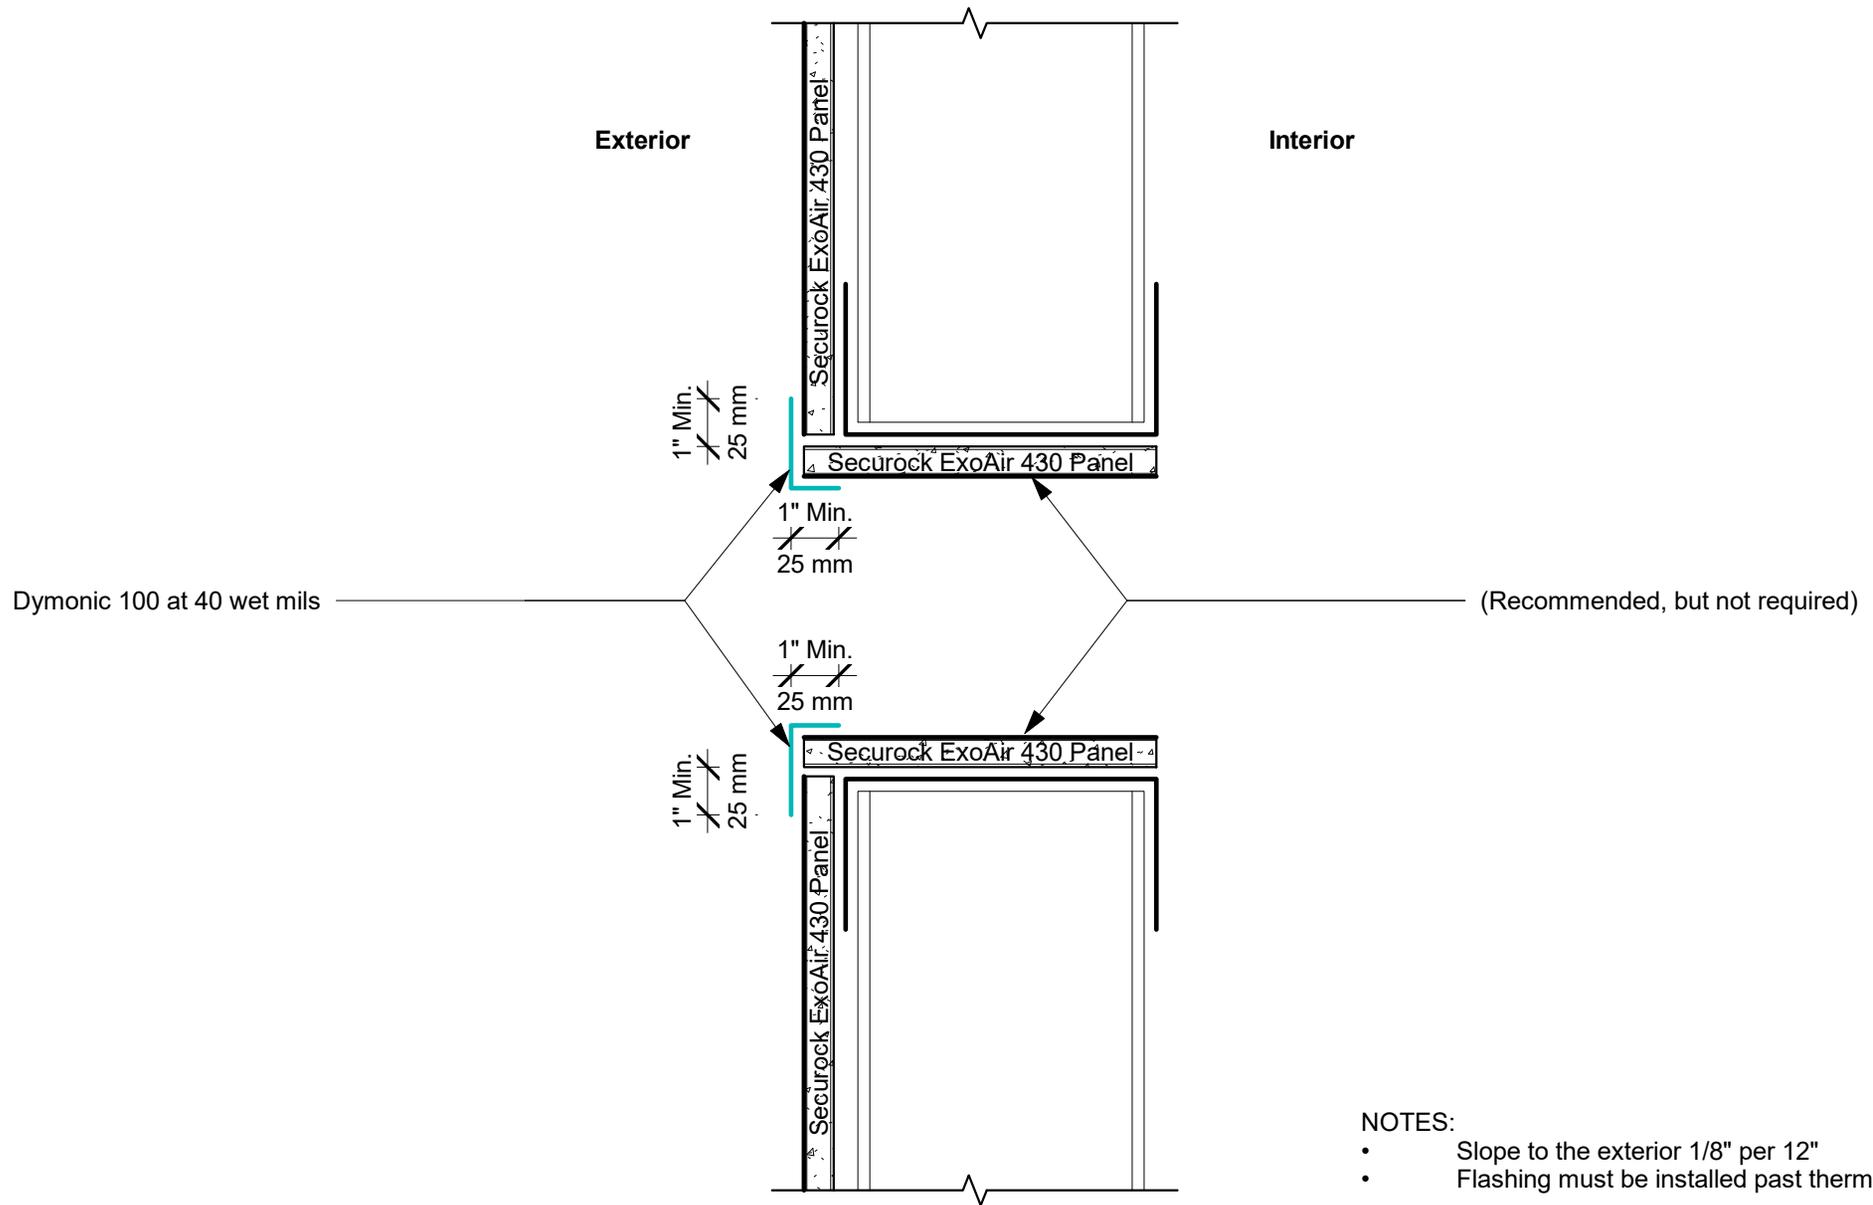

**NOTES:**


- Slope to the exterior 1/8" per 12"
- Flashing must be installed past thermal break

See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.*

The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.

The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.

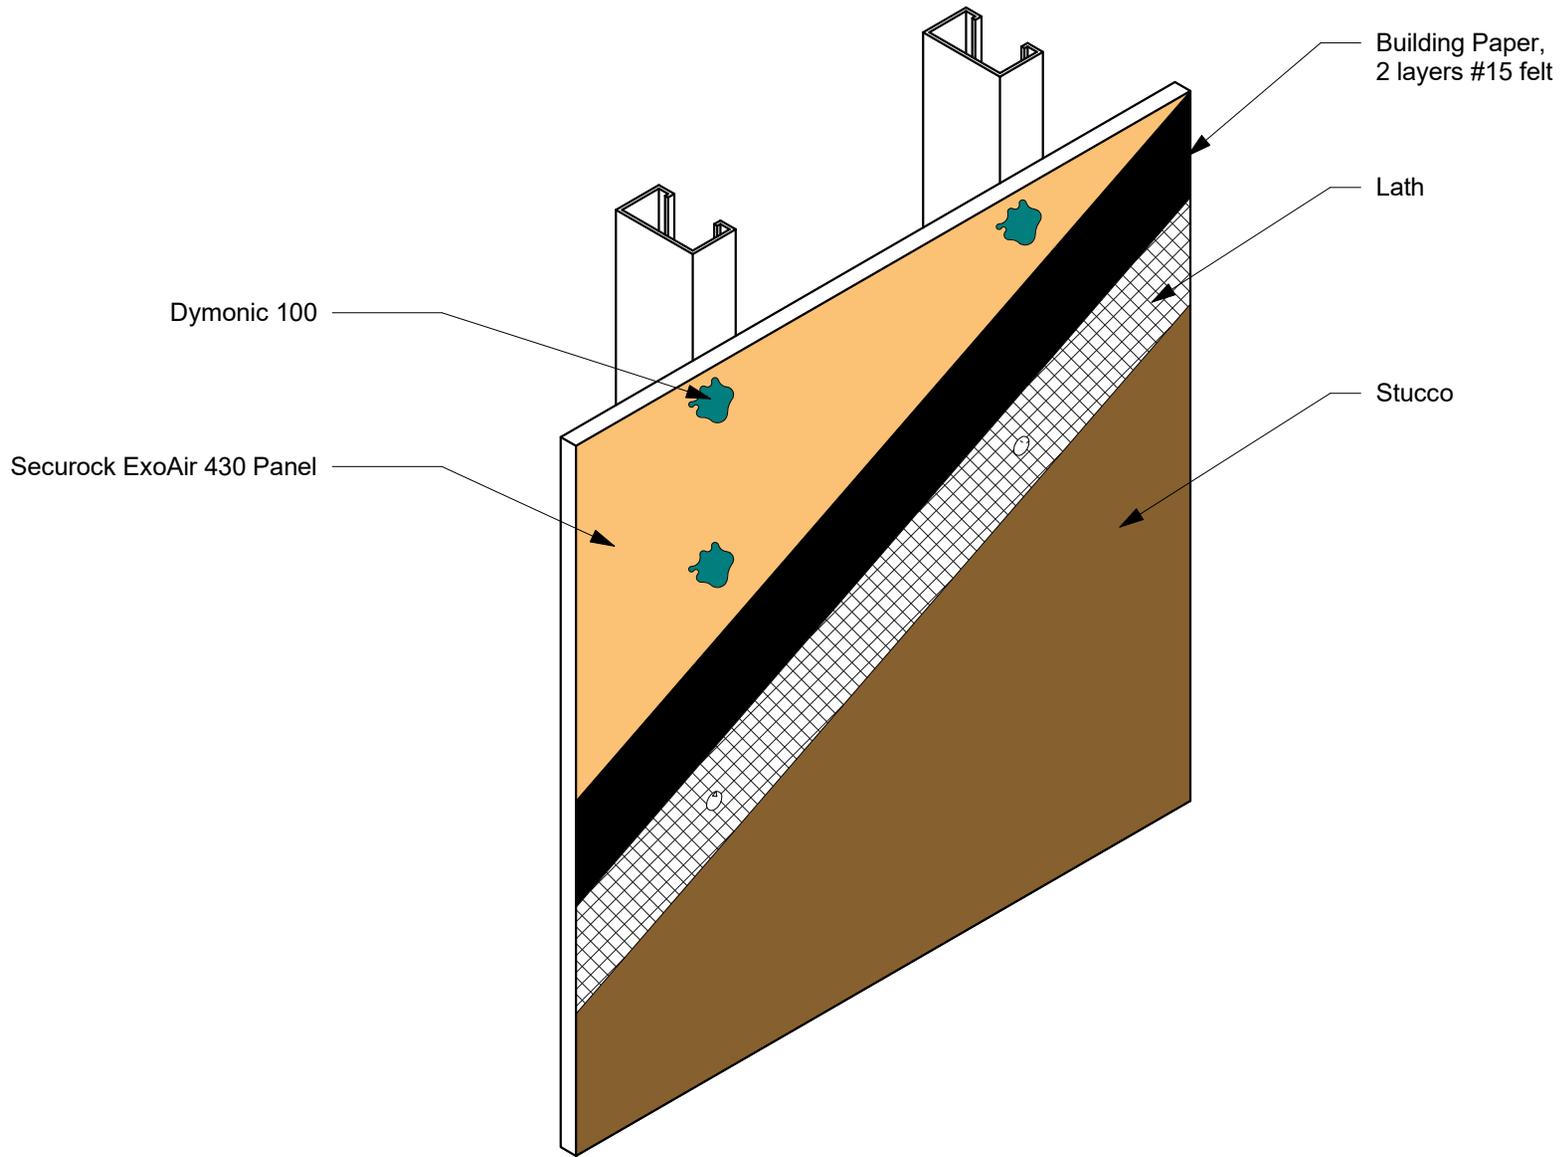

See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.*

The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.

The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.



**United States Gypsum Company**  
 550 West Adams Street  
 Chicago, IL 60661

USG Technical & Customer Support:  
 800.USG.4YOU (874-4968)

**Tremco Commercial Sealants & Waterproofing**  
 3735 Green Road  
 Beachwood, OH 44122


Tremco Technical Support:  
 866.209.2404

Stucco Applications

Scale: 3" = 1'-0"

Rev. No. Rev. Date

14177

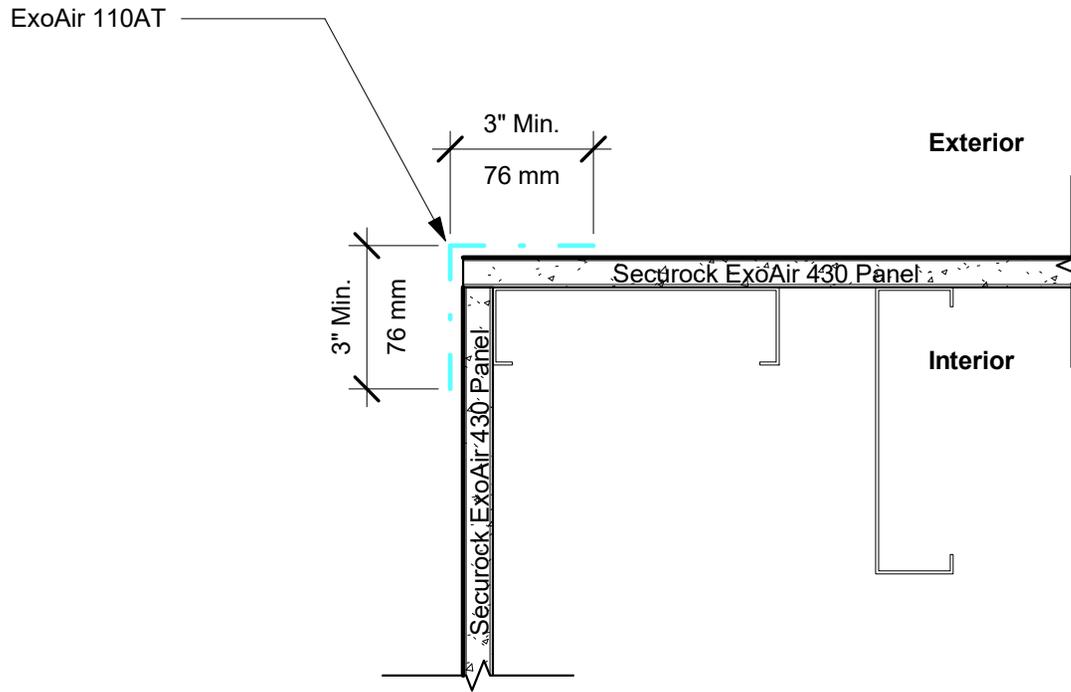

**NOTES:**

- Terminate with Dymonic 100 on any horizontal edge not oriented to shed water or at the end of that day's work

See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.*

*The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.*

*The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.*



**United States Gypsum Company**  
550 West Adams Street  
Chicago, IL 60661

USG Technical & Customer Support:  
800.USG.4YOU (874-4968)

**Tremco Commercial Sealants & Waterproofing**  
3735 Green Road  
Beachwood, OH 44122


Tremco Technical Support:  
866.209.2404

Outside Corner - ExoAir 110AT

Scale: 3" = 1'-0"

Rev. No. Rev. Date

15838

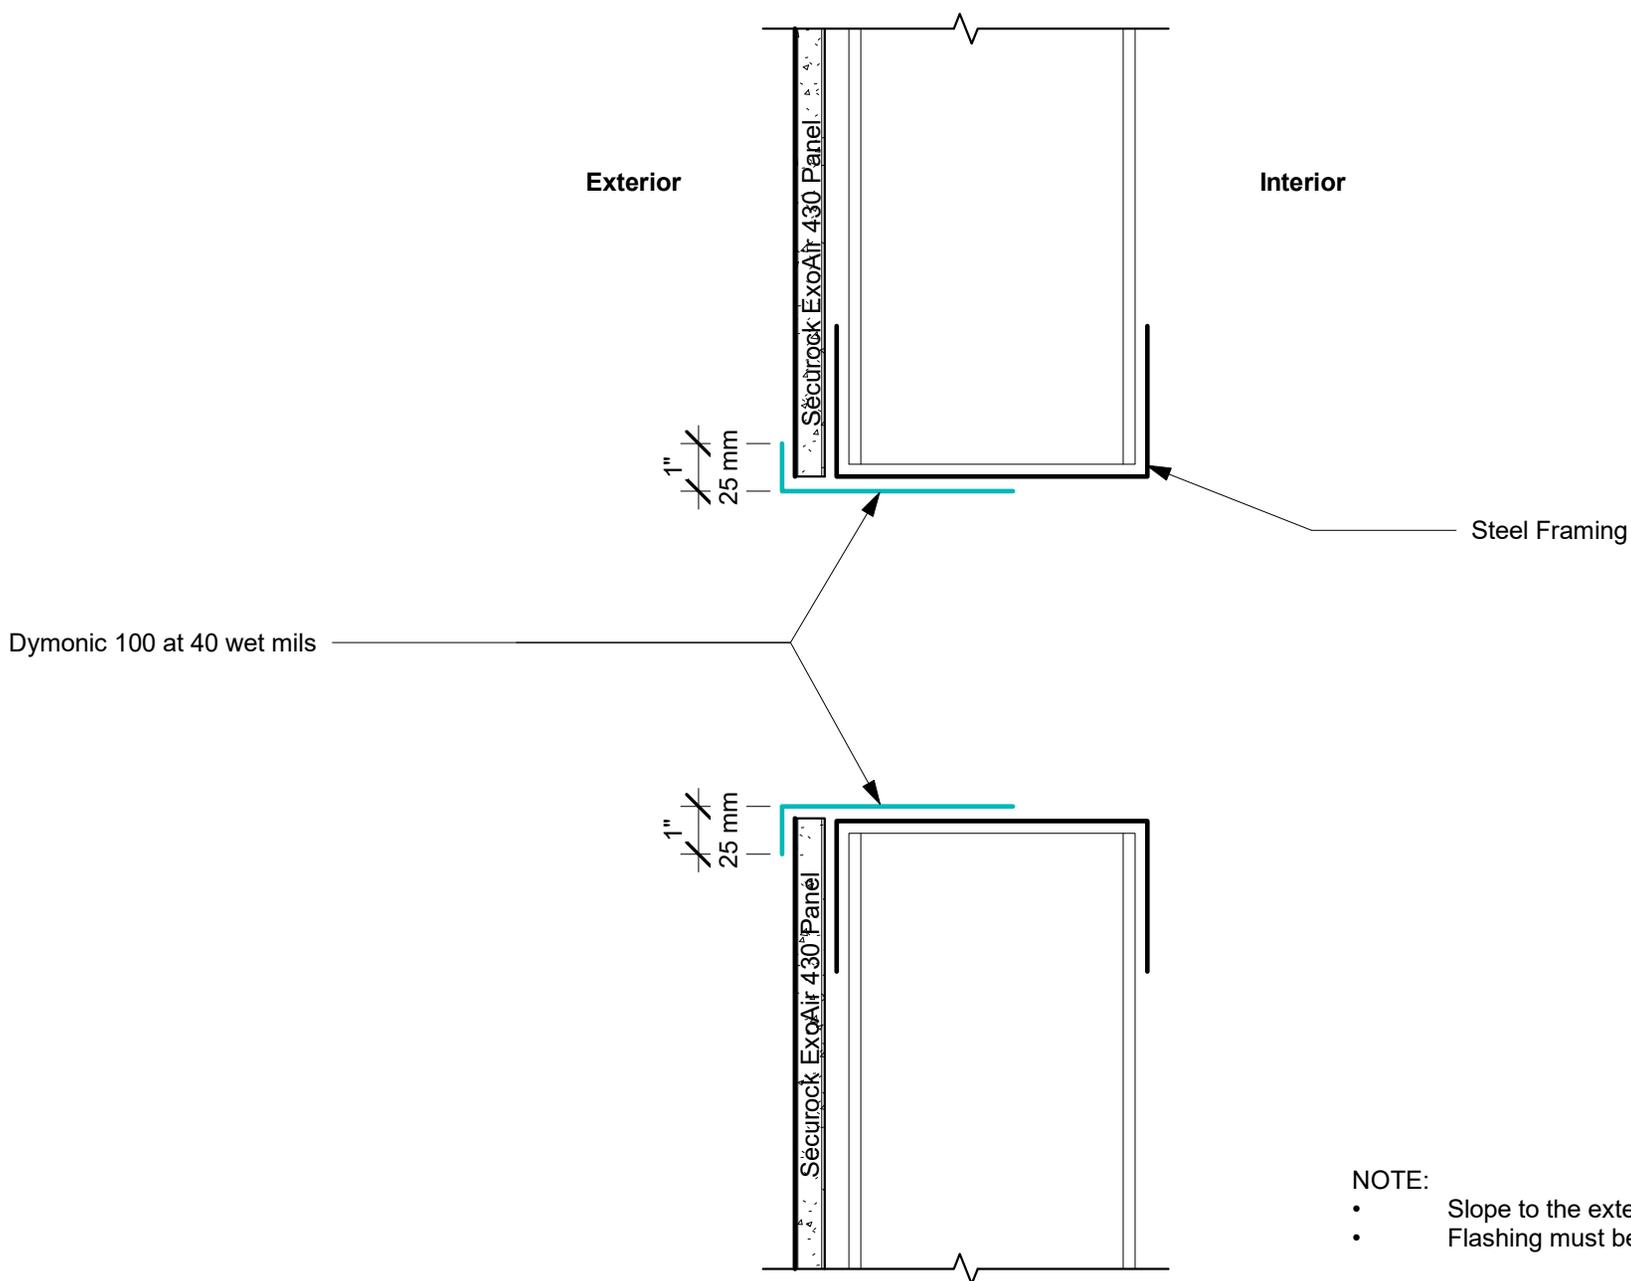


See securockexoair.com for the most up-to-date product information.

This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.

The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECURLOCK, USG, USG in stylized letters.

The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.

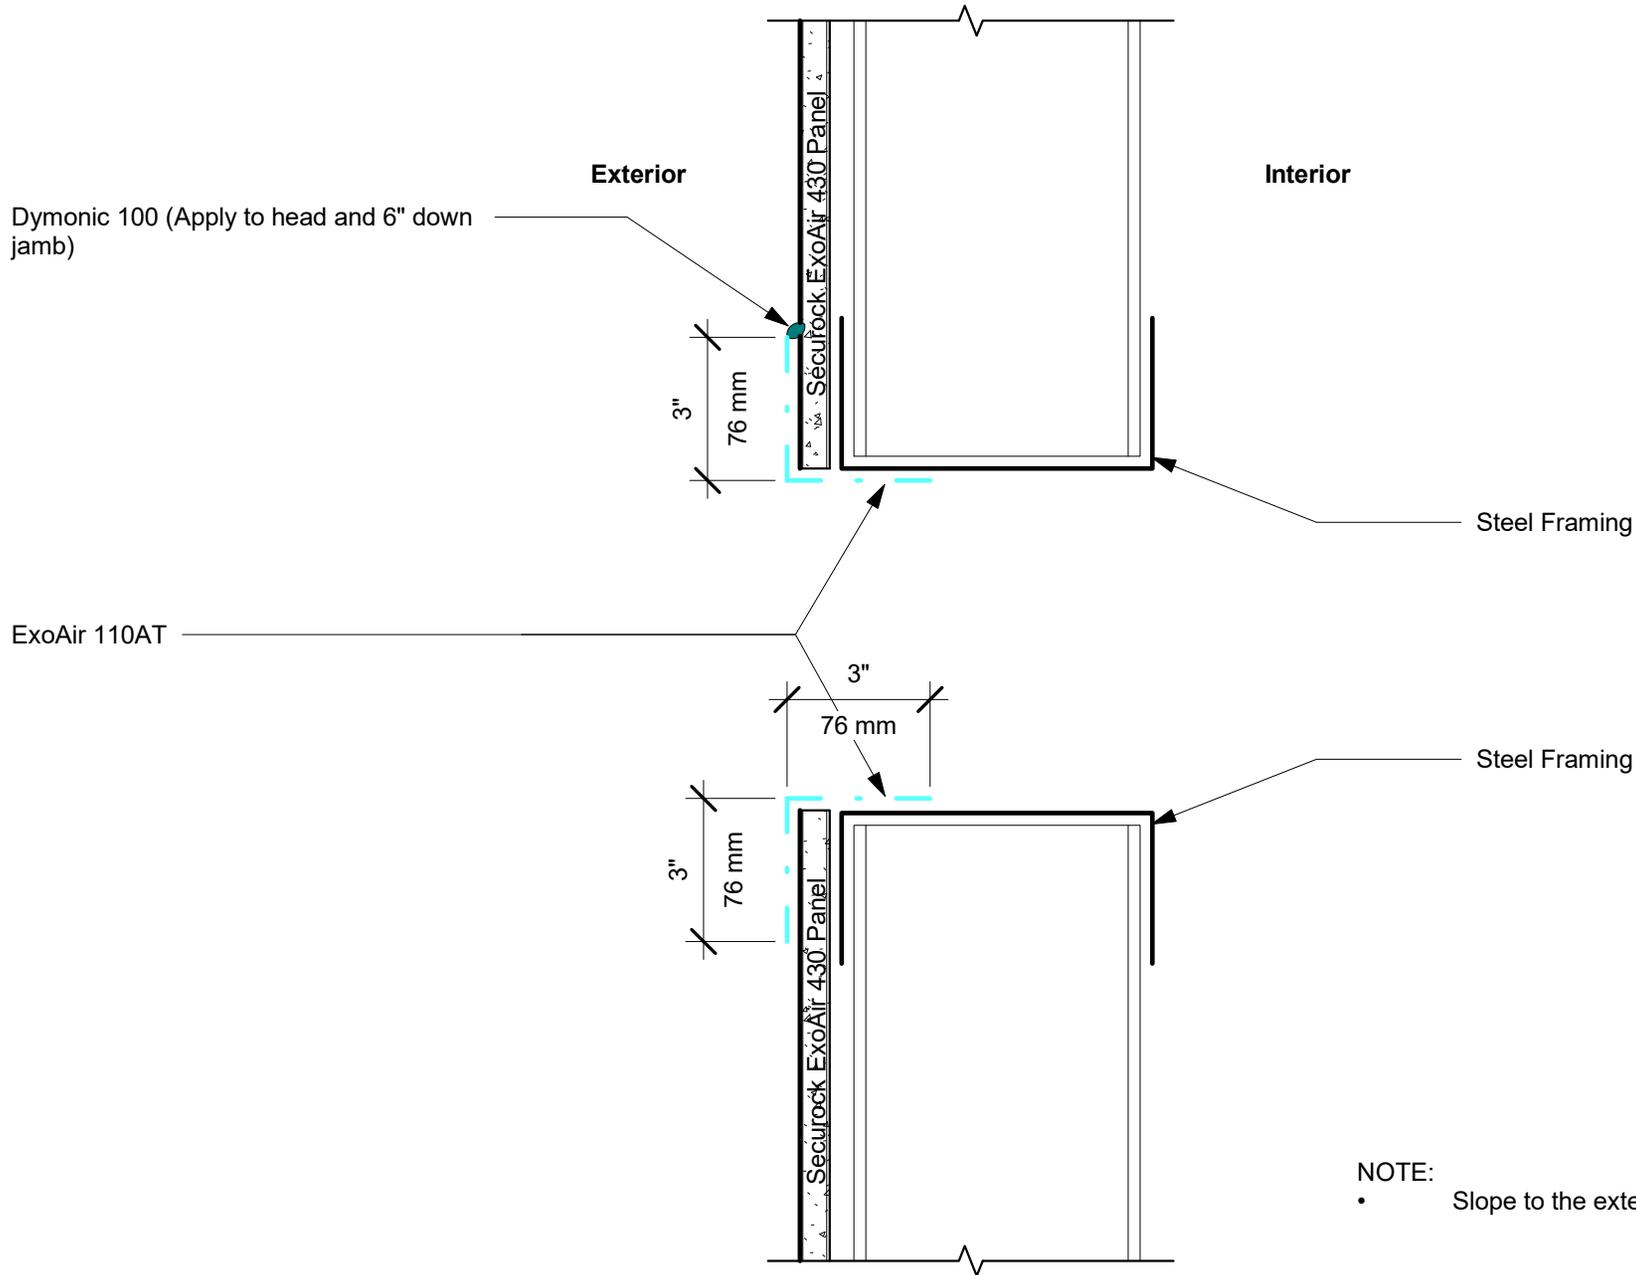


See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.*

The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.

The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.

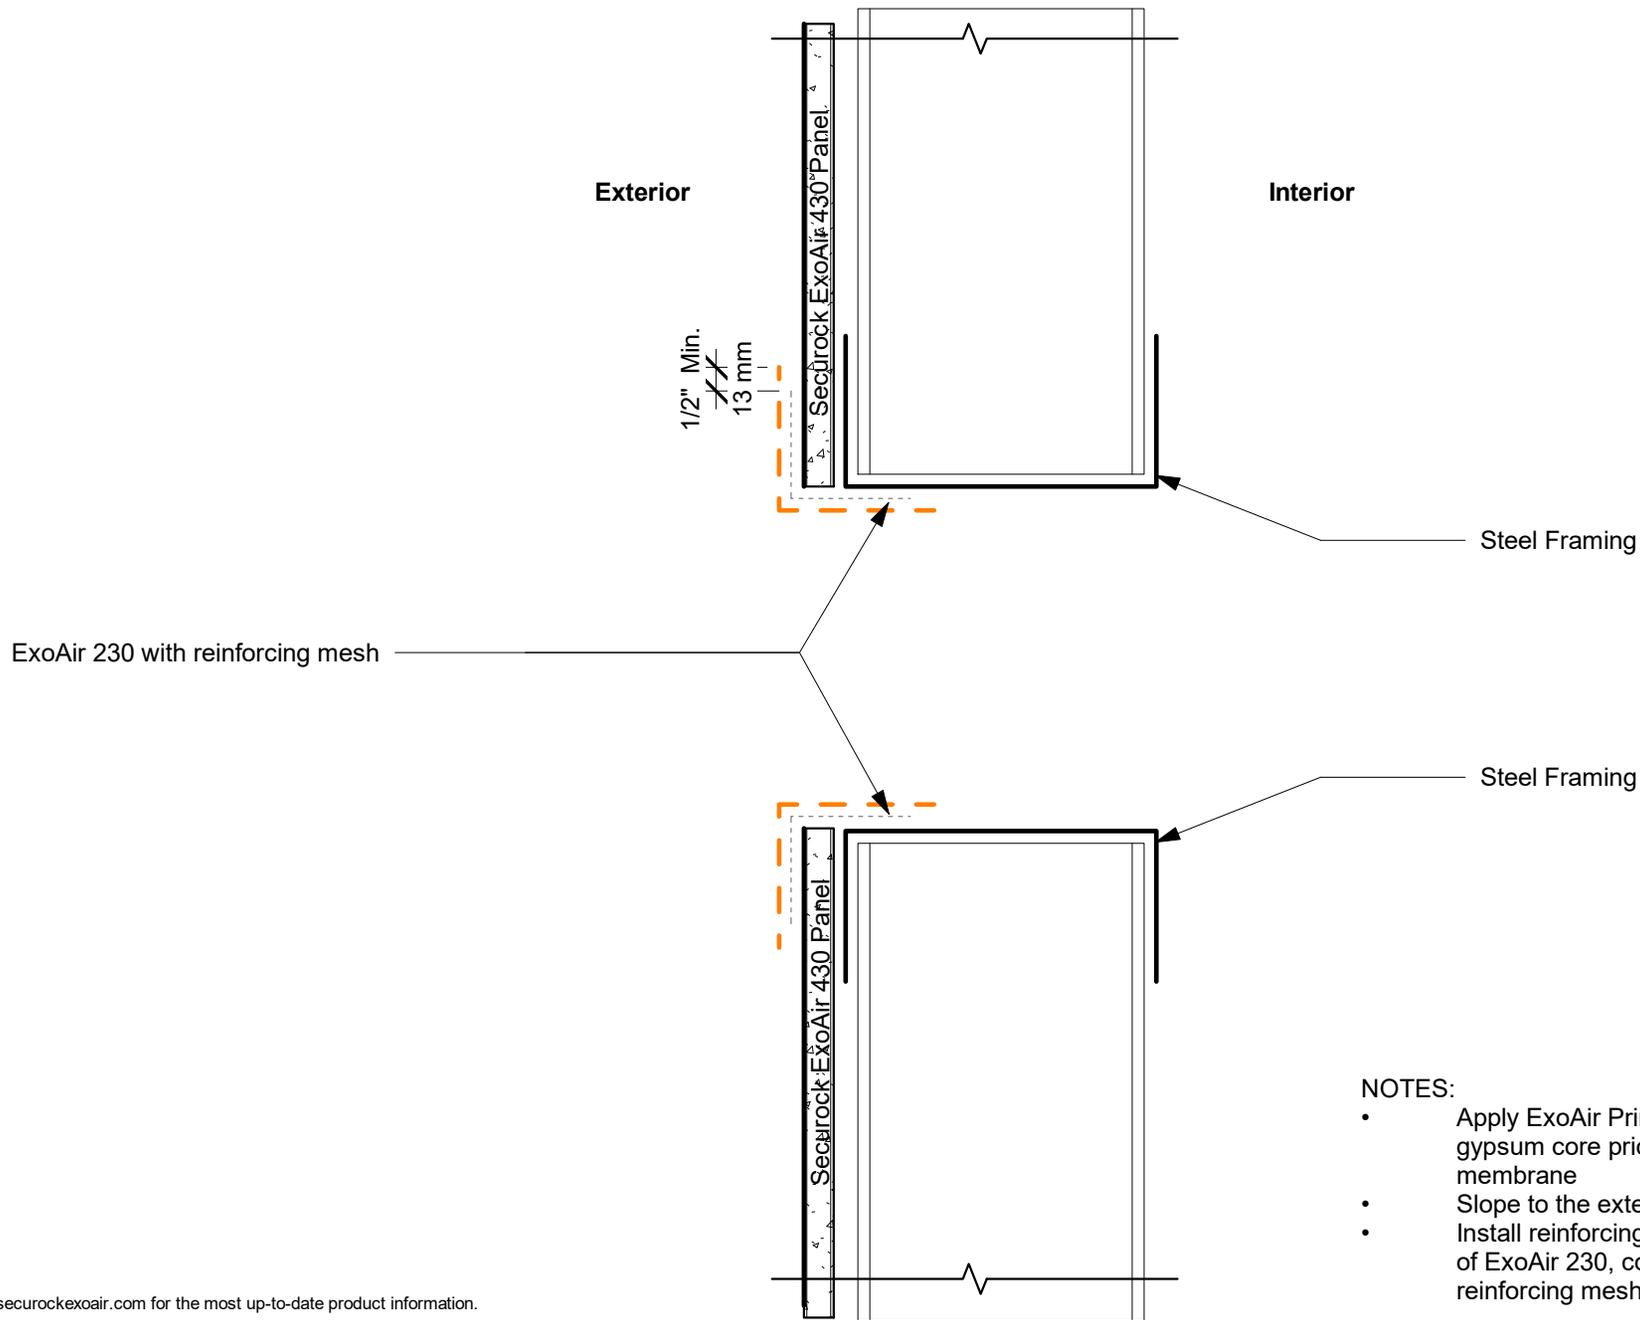

**NOTES:**


- Apply ExoAir Primer to all exposed gypsum core prior to application of membrane
- Slope to the exterior 1/8" per 12"
- Install reinforcing mesh with 50 wet mils of ExoAir 230, completely covering reinforcing mesh

See [securorckexoair.com](http://securorckexoair.com) for the most up-to-date product information.

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.*

The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.

The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.

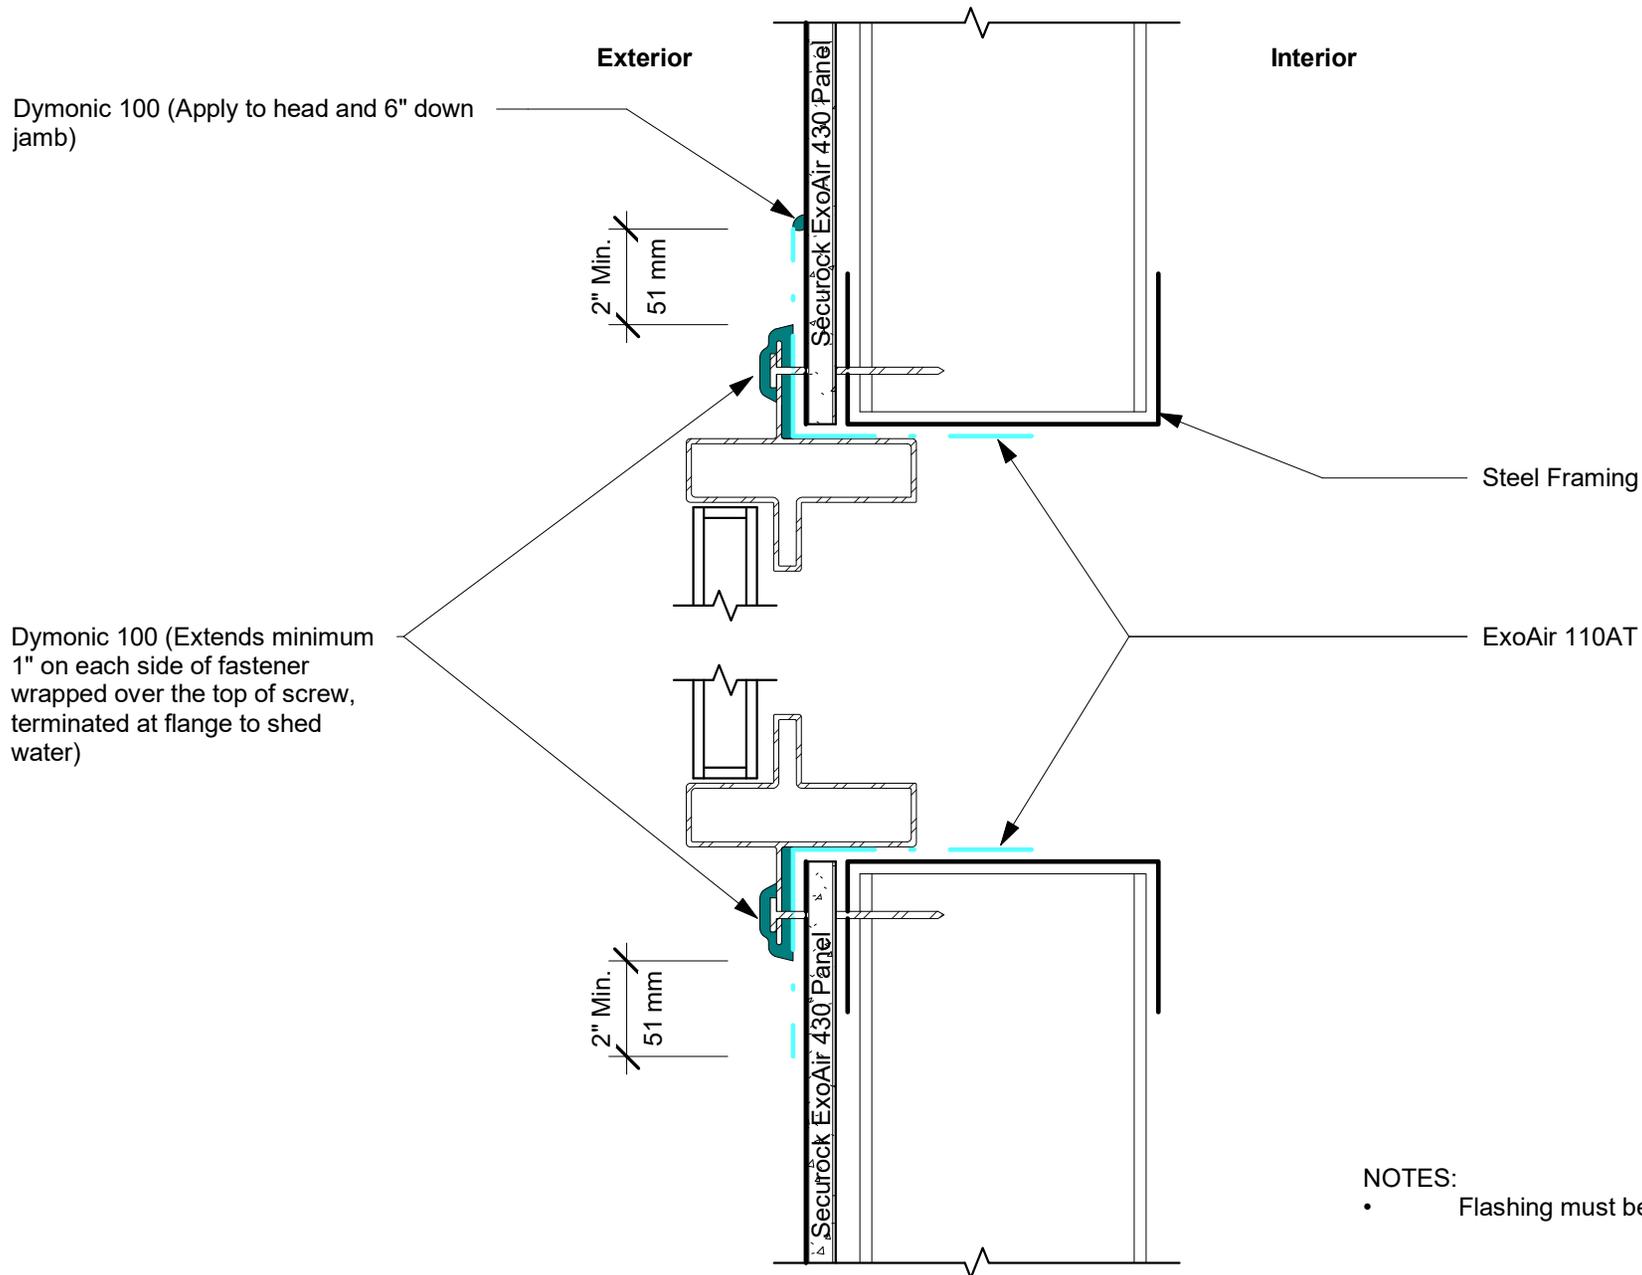


- NOTES:**
- Flashing must be installed past thermal break

See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.*

The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.

The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.

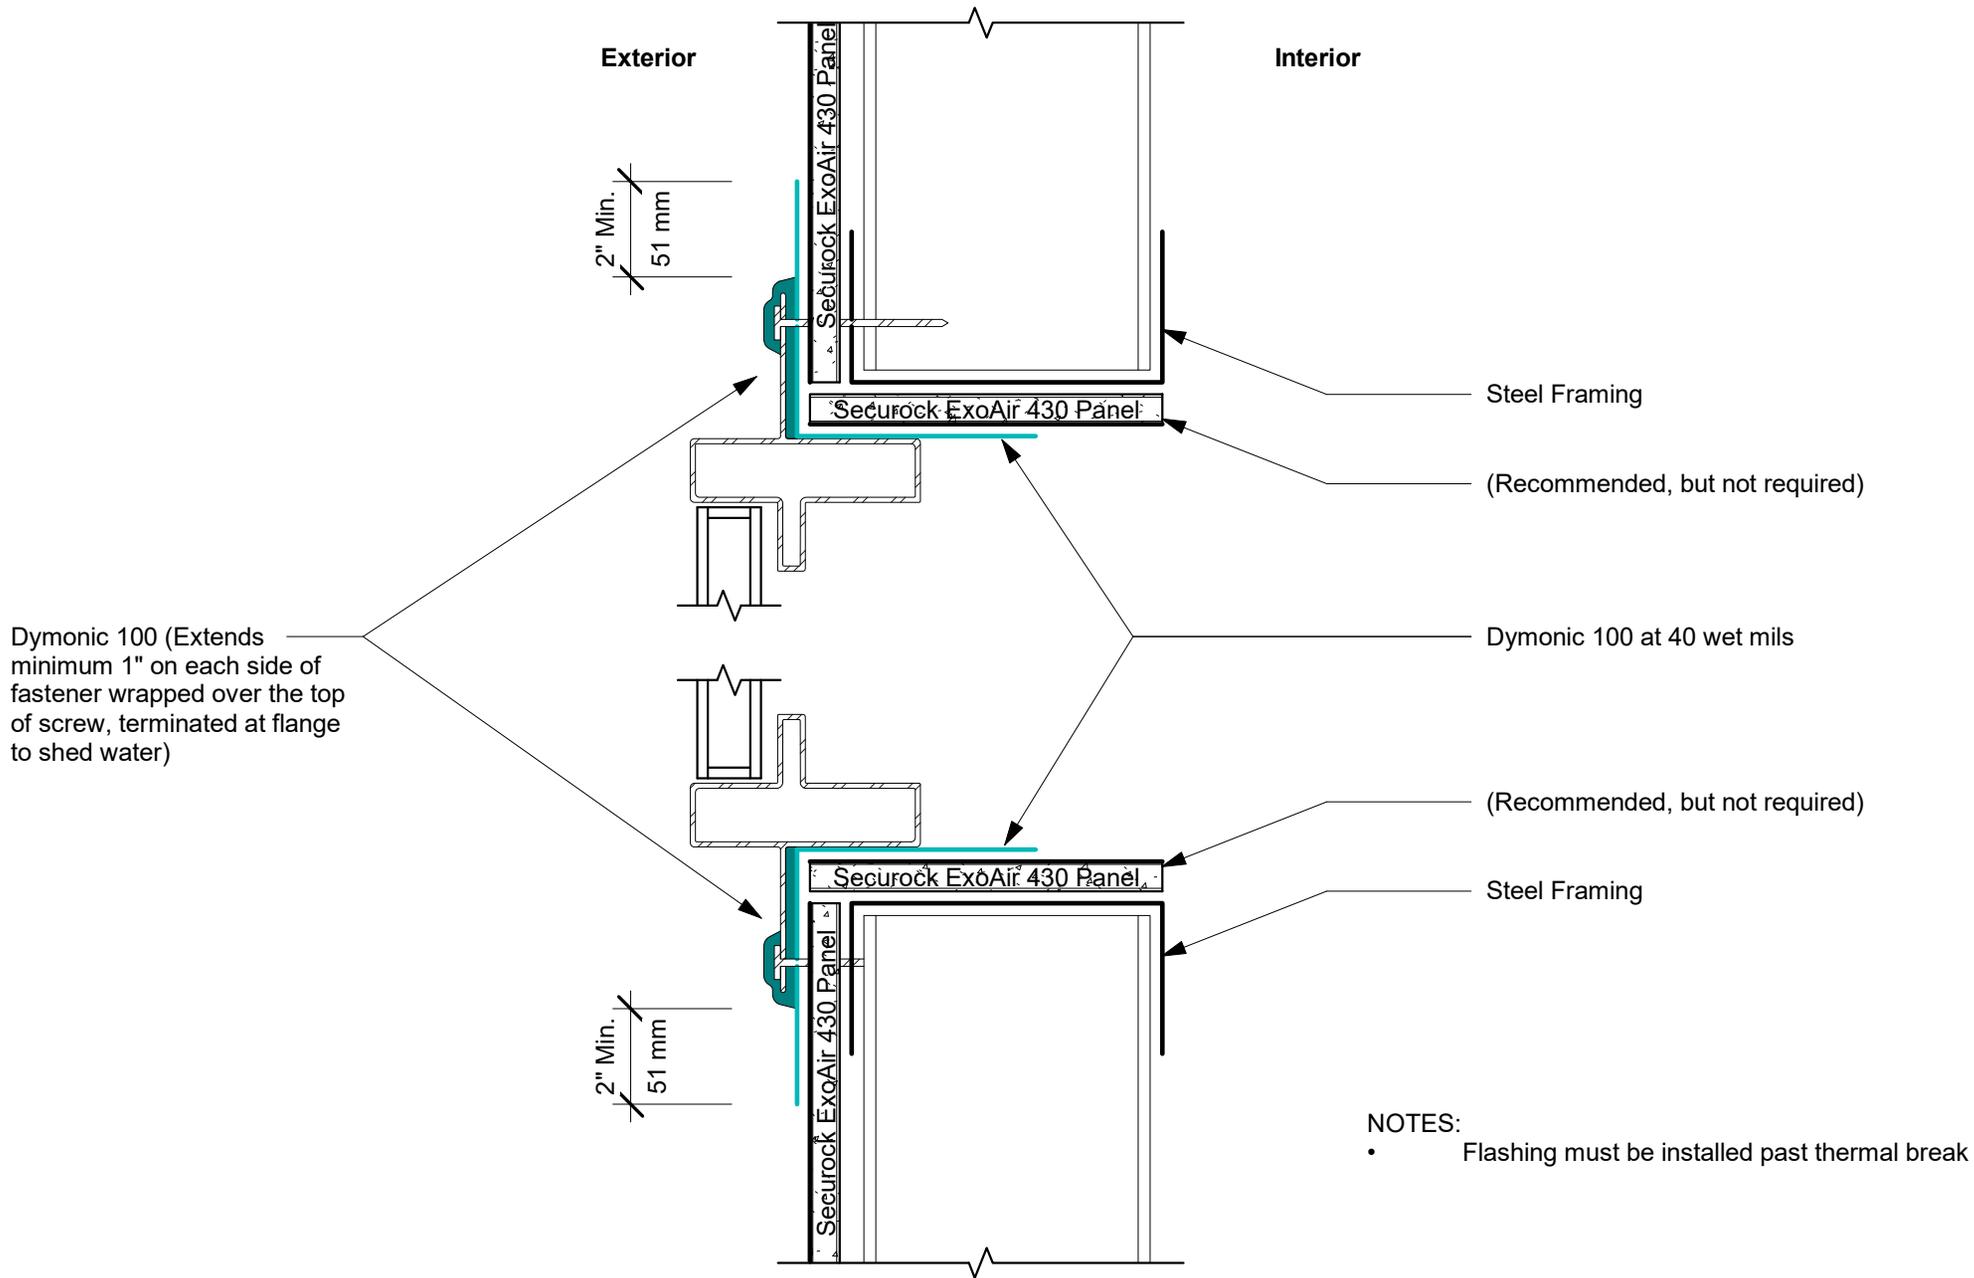


See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.

This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.

The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.

The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.

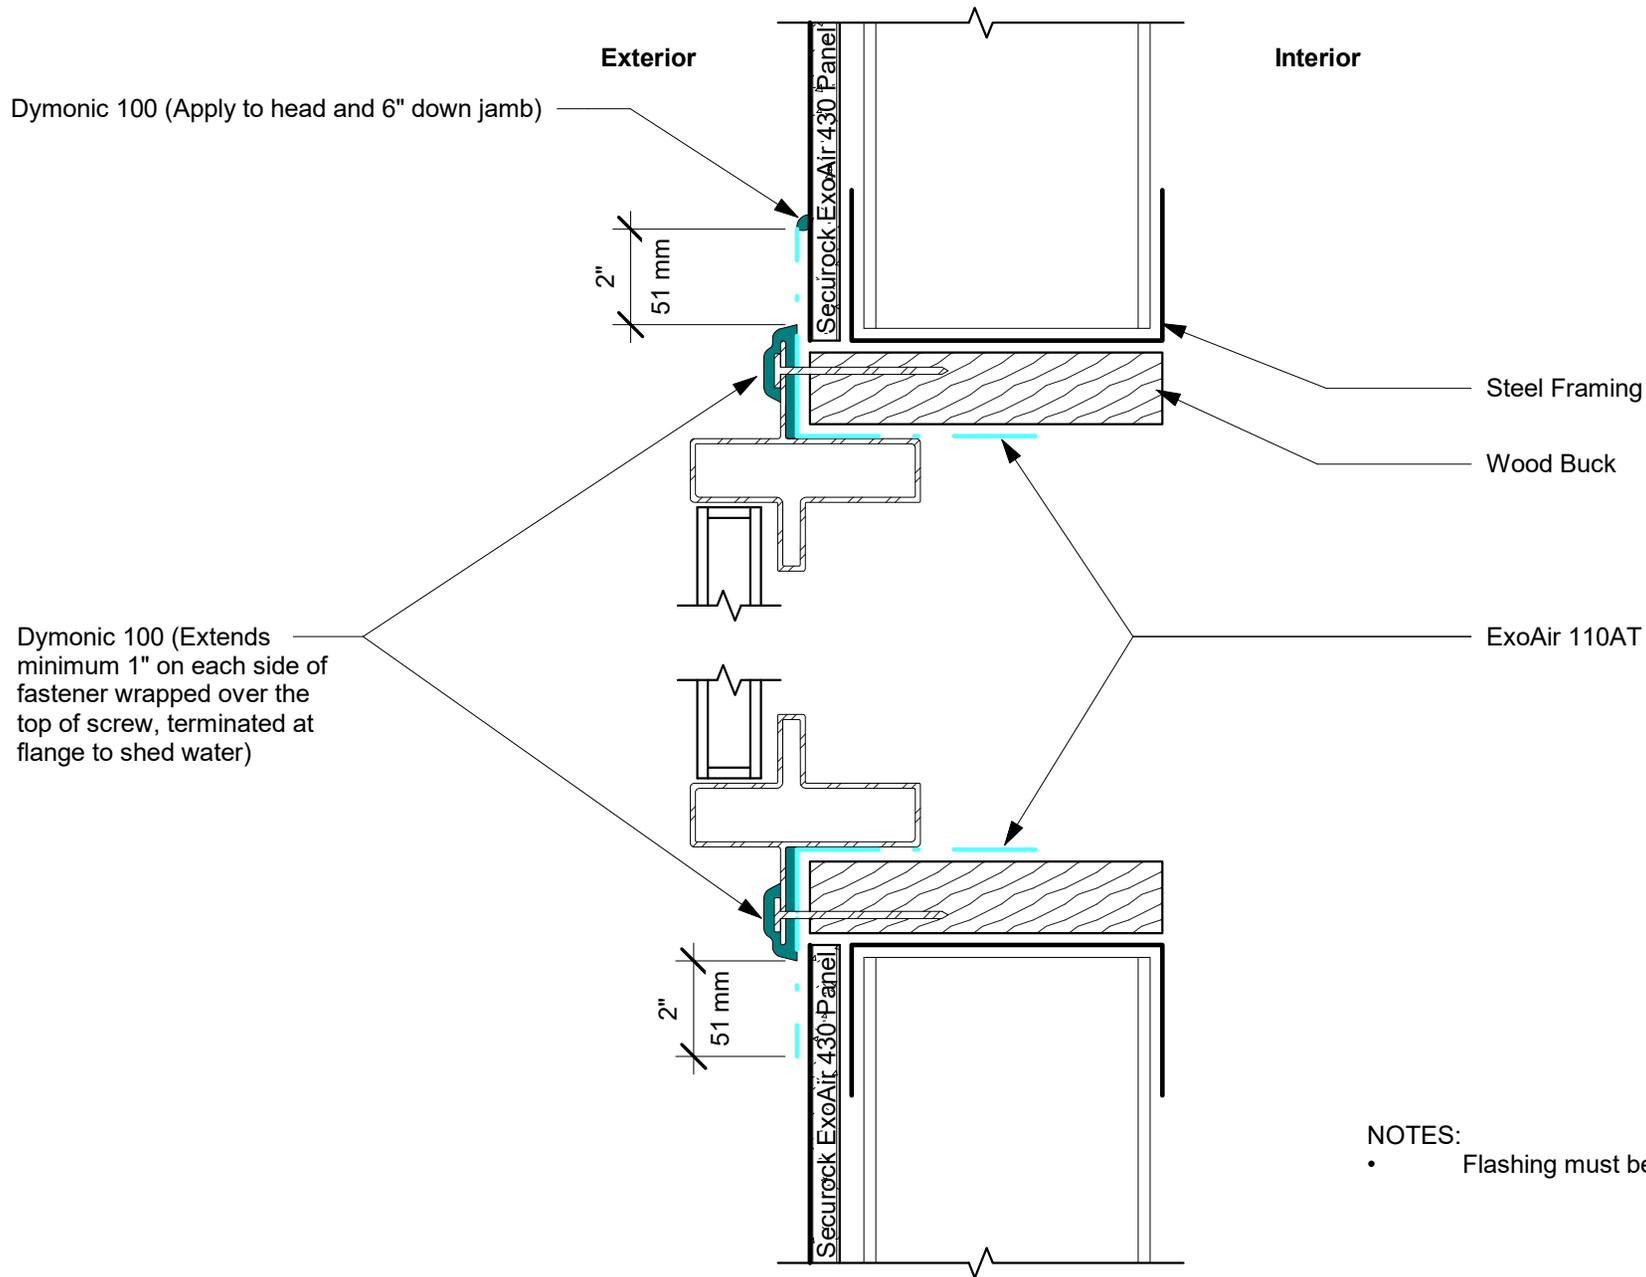

**NOTES:**


- Flashing must be installed past thermal break

See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.*

The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.

The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.

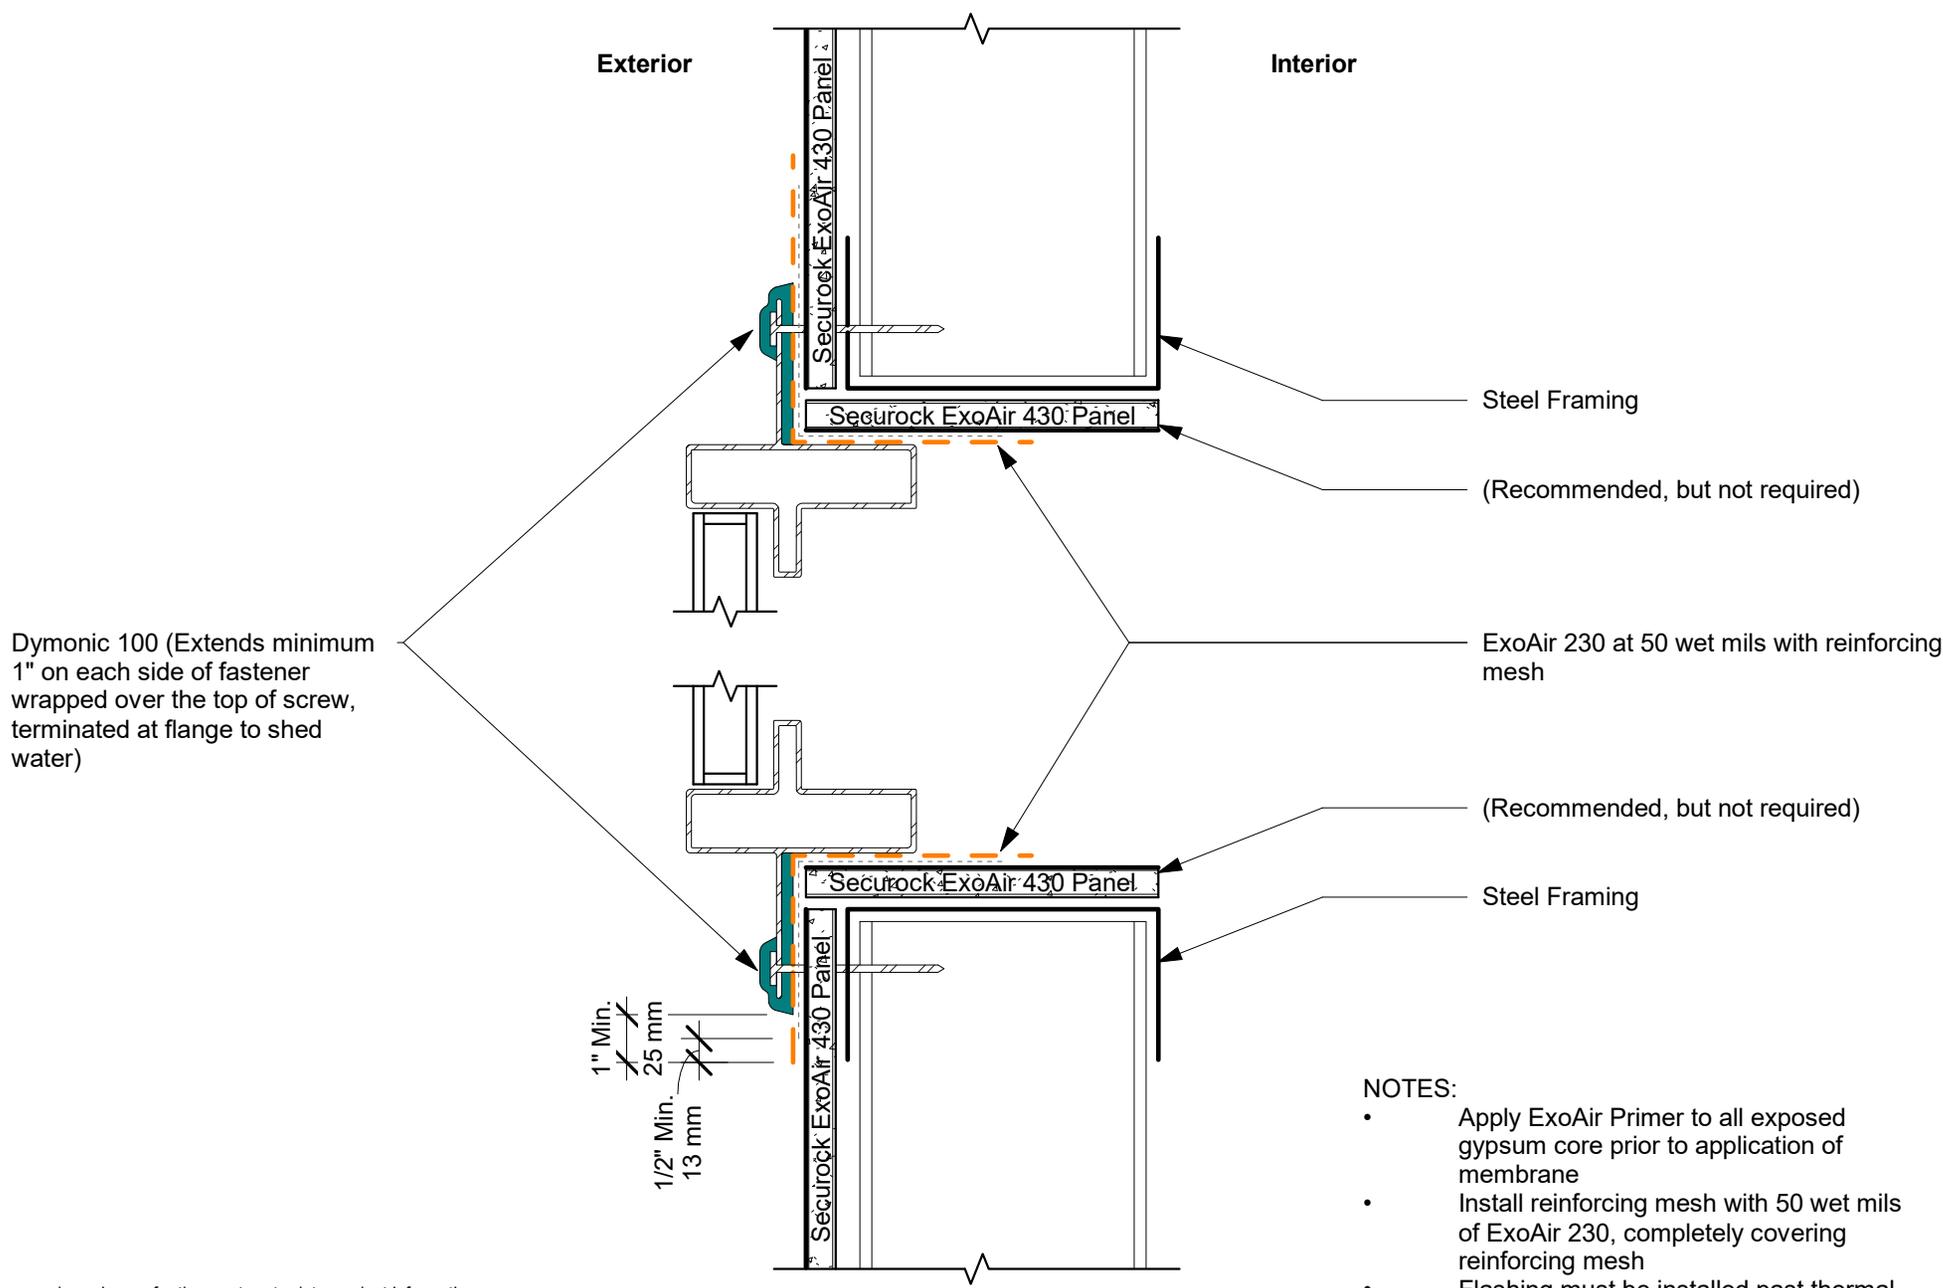

See [seurockexoair.com](http://seurockexoair.com) for the most up-to-date product information.

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.*

The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.  
 The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.



**United States Gypsum Company**  
 550 West Adams Street  
 Chicago, IL 60661  
 USG Technical & Customer Support:  
 800.USG.4YOU (874-4968)

**Tremco Commercial Sealants & Waterproofing**  
 3735 Green Road  
 Beachwood, OH 44122  
 Tremco Technical Support:  
 866.209.2404


Nail Flange - Fluid-Applied Flashing - Panel

Scale: 3" = 1'-0"

Rev. No.	Rev. Date
15845	

Dymonic 100 (Extends minimum 1" on each side of fastener wrapped over the top of screw, terminated at flange to shed water)

1" Min.  
13 mm  
1/2" Min.  
13 mm

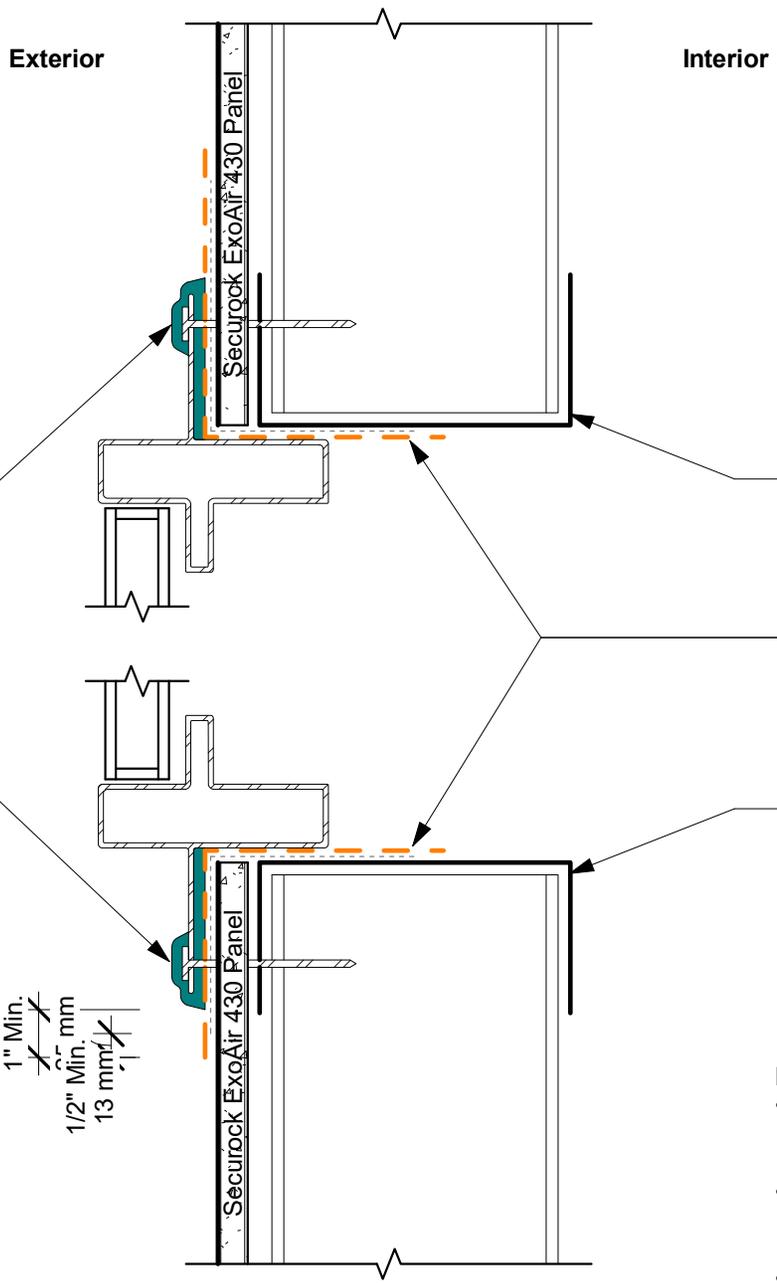

Steel Framing

ExoAir 230 at 50 wet mils with reinforcing mesh

Steel Framing

**NOTES:**

- Apply ExoAir Primer to all exposed gypsum core prior to application of membrane
- Install reinforcing mesh with 50 wet mils of ExoAir 230, completely covering reinforcing mesh
- Flashing must be installed past thermal break

See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.*

The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.  
The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.




**United States Gypsum Company**  
550 West Adams Street  
Chicago, IL 60661  
  
USG Technical & Customer Support:  
800.USG.4YOU (874-4968)

**Tremco Commercial Sealants & Waterproofing**  
3735 Green Road  
Beachwood, OH 44122  
  
Tremco Technical Support:  
866.209.2404

**Nail Flange - Fluid-Applied Flashing - Framing**  
  
Scale: 3" = 1'-0"

Rev. No.	Rev. Date
15846	

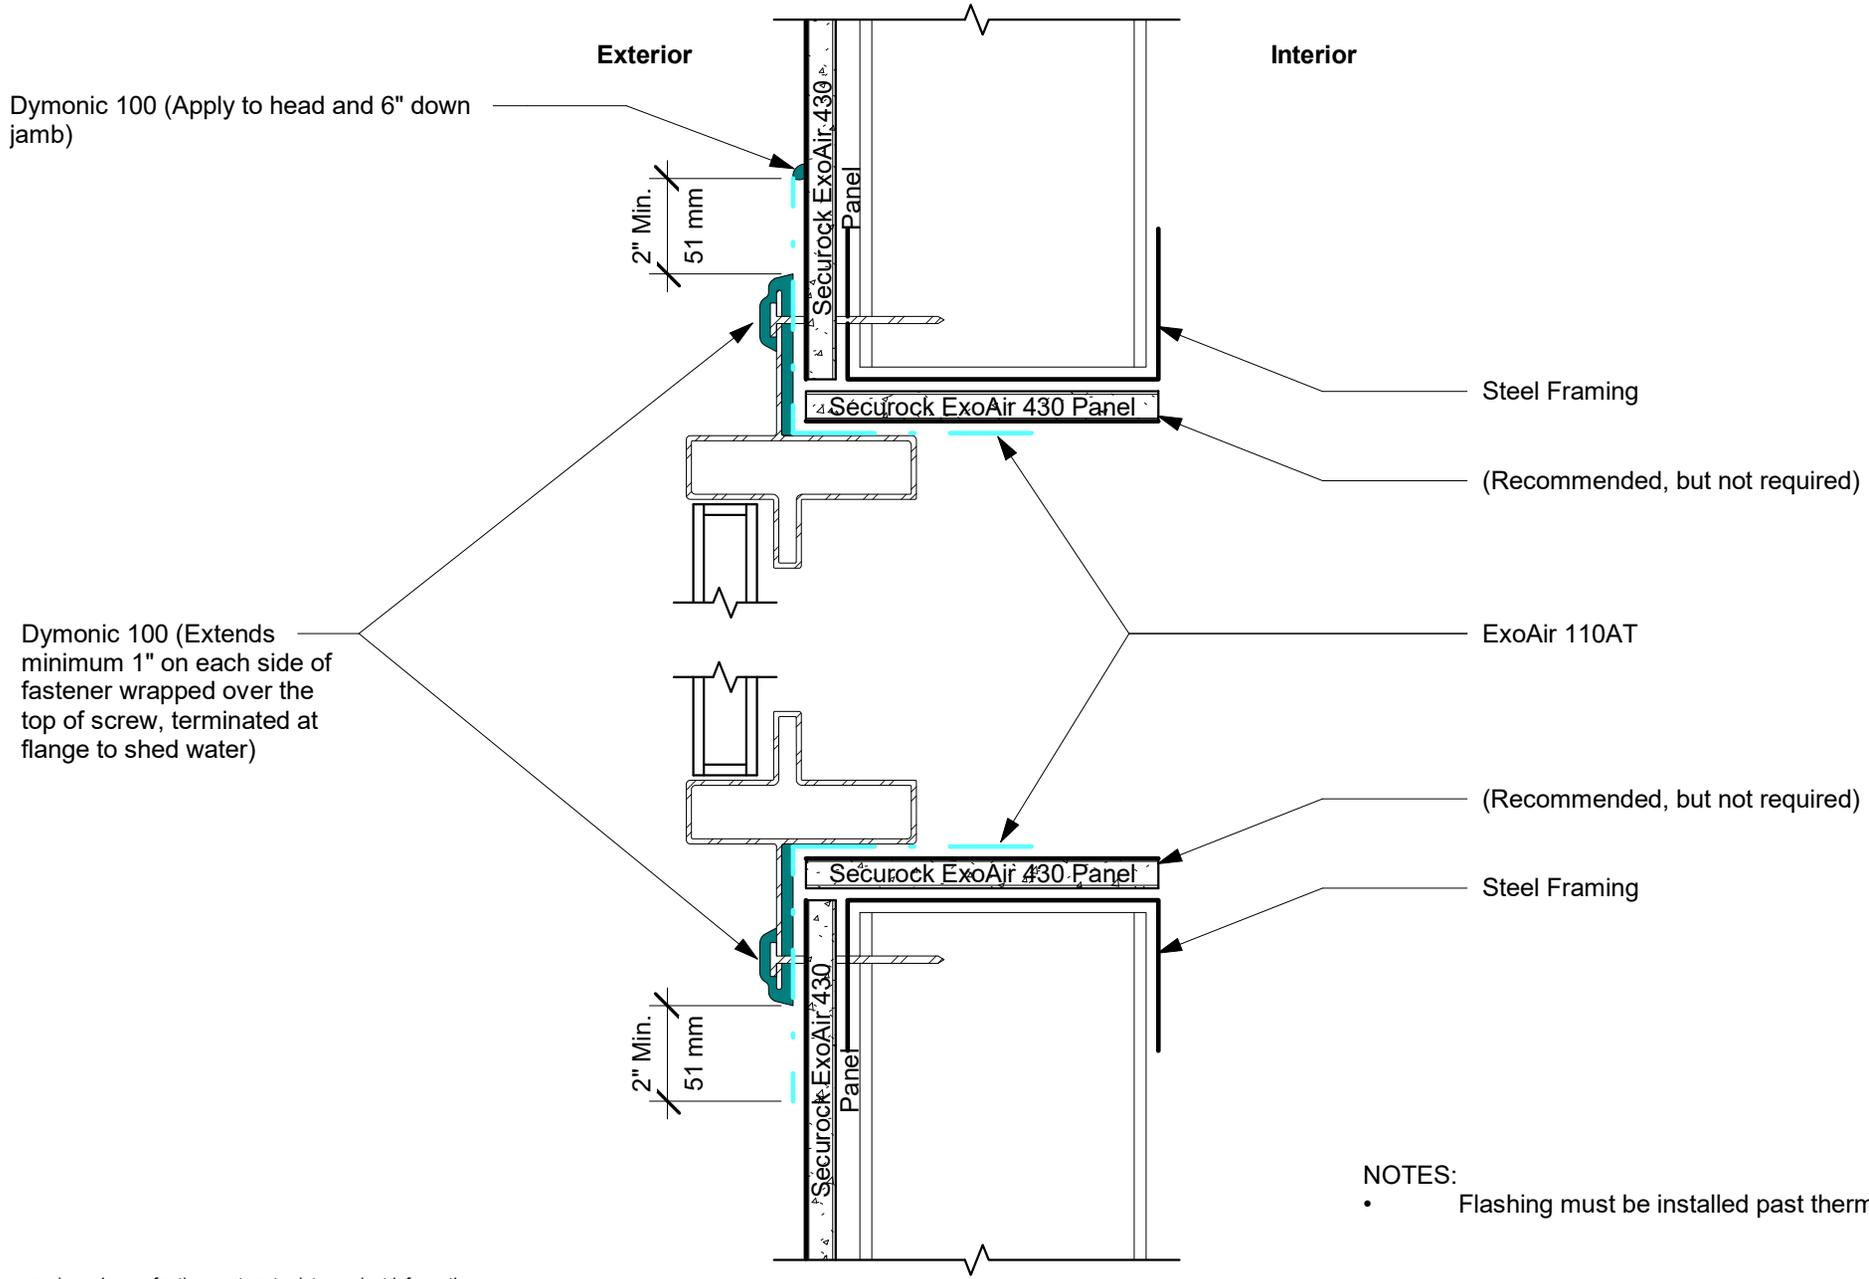

See [securorockexoair.com](http://securorockexoair.com) for the most up-to-date product information.

This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.

The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.  
 The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.




**United States Gypsum Company**  
 550 West Adams Street  
 Chicago, IL 60661  
 USG Technical & Customer Support:  
 800.USG.4YOU (874-4968)

**Tremco Commercial Sealants & Waterproofing**  
 3735 Green Road  
 Beachwood, OH 44122  
 Tremco Technical Support:  
 866.209.2404

Nail Flange - ExoAir 110AT - Panel

Scale: 3" = 1'-0"

Rev. No.	Rev. Date
15847	

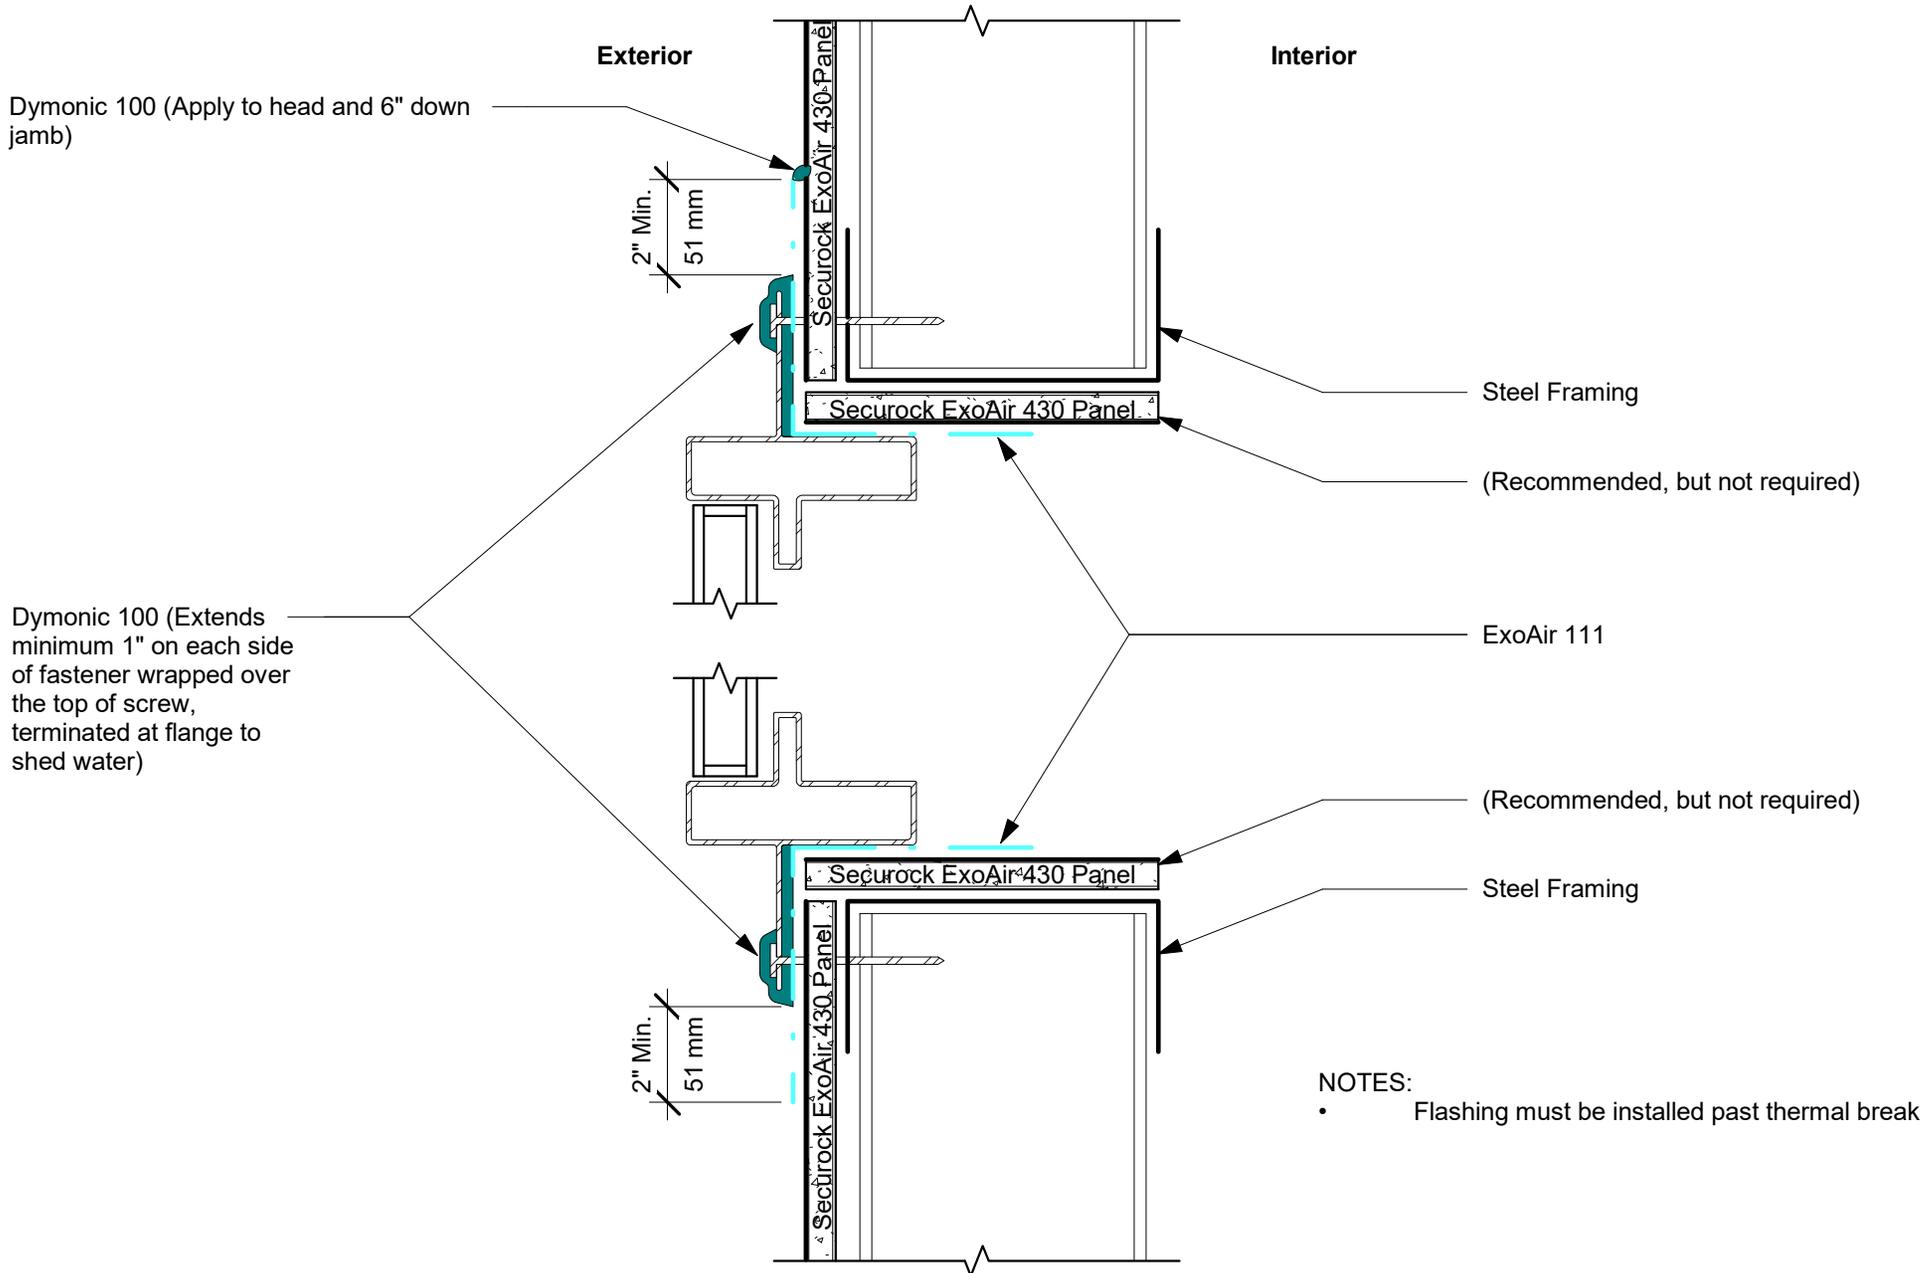


See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.*

The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.

The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.

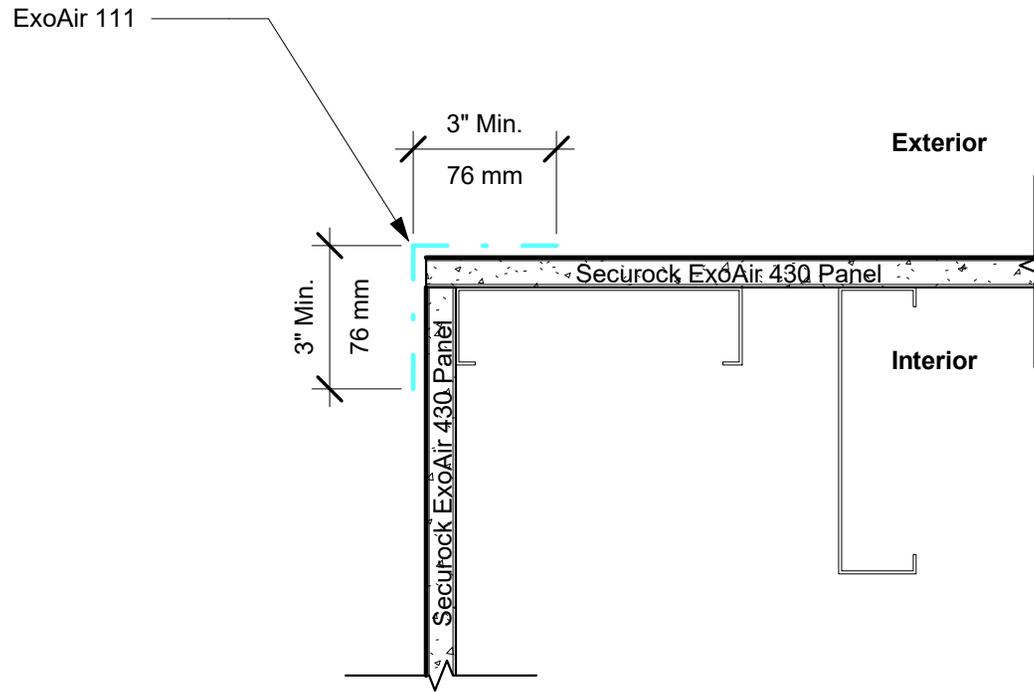

**NOTES:**

- Terminate with Dymonic 100 on any horizontal edge not oriented to shed water or at the end of that day's work

See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information.


*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.*

*The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.*

*The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.*

 <p><b>USG CGC TREMCO</b> PERFORMANCE BUILT IN</p>	<p><b>United States Gypsum Company</b> 550 West Adams Street Chicago, IL 60661</p> <p>USG Technical &amp; Customer Support: 800.USG.4YOU (874-4968)</p>	<p><b>Tremco Commercial Sealants &amp; Waterproofing</b> 3735 Green Road Beachwood, OH 44122</p> <p>Tremco Technical Support: 866.209.2404</p>	<p>Outside Corner - ExoAir 111</p>	<p>Rev. No.    Rev. Date</p>
	<p>Scale: 3" = 1'-0"</p>			<p><b>15947</b></p>

Dymonic 100 at 40 mils

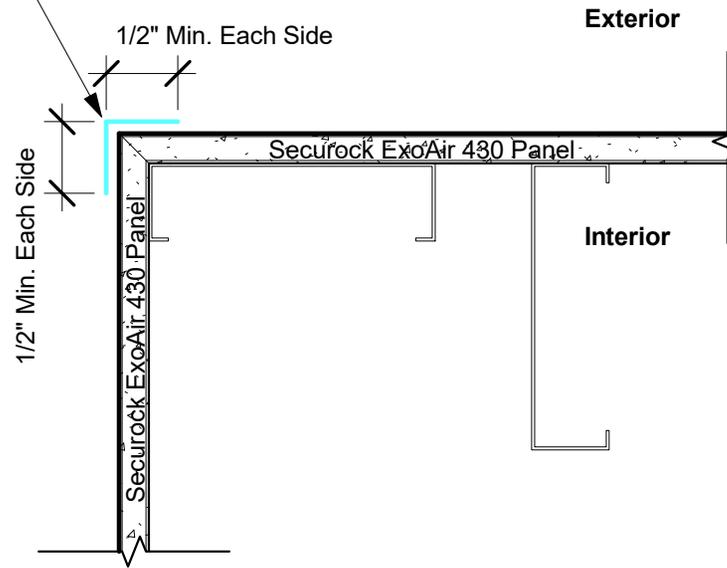

**NOTES:**

- Terminate with Dymonic 100 on any horizontal edge not oriented to shed water or at the end of that day's work

See [securorockexoair.com](http://securorockexoair.com) for the most up-to-date product information.

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional.*

*The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters.*

*The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.*



**United States Gypsum Company**  
550 West Adams Street  
Chicago, IL 60661

USG Technical & Customer Support:  
800.USG.4YOU (874-4968)

**Tremco Commercial Sealants & Waterproofing**  
3735 Green Road  
Beachwood, OH 44122

Tremco Technical Support:  
866.209.2404

Board Milling

Scale: 3" = 1'-0"

Rev. No. Rev. Date

16729