


Dymonic 100  
(Extends minimum 1" on each side of fastener wrapped over the top of screw, terminated at flange to shed water)

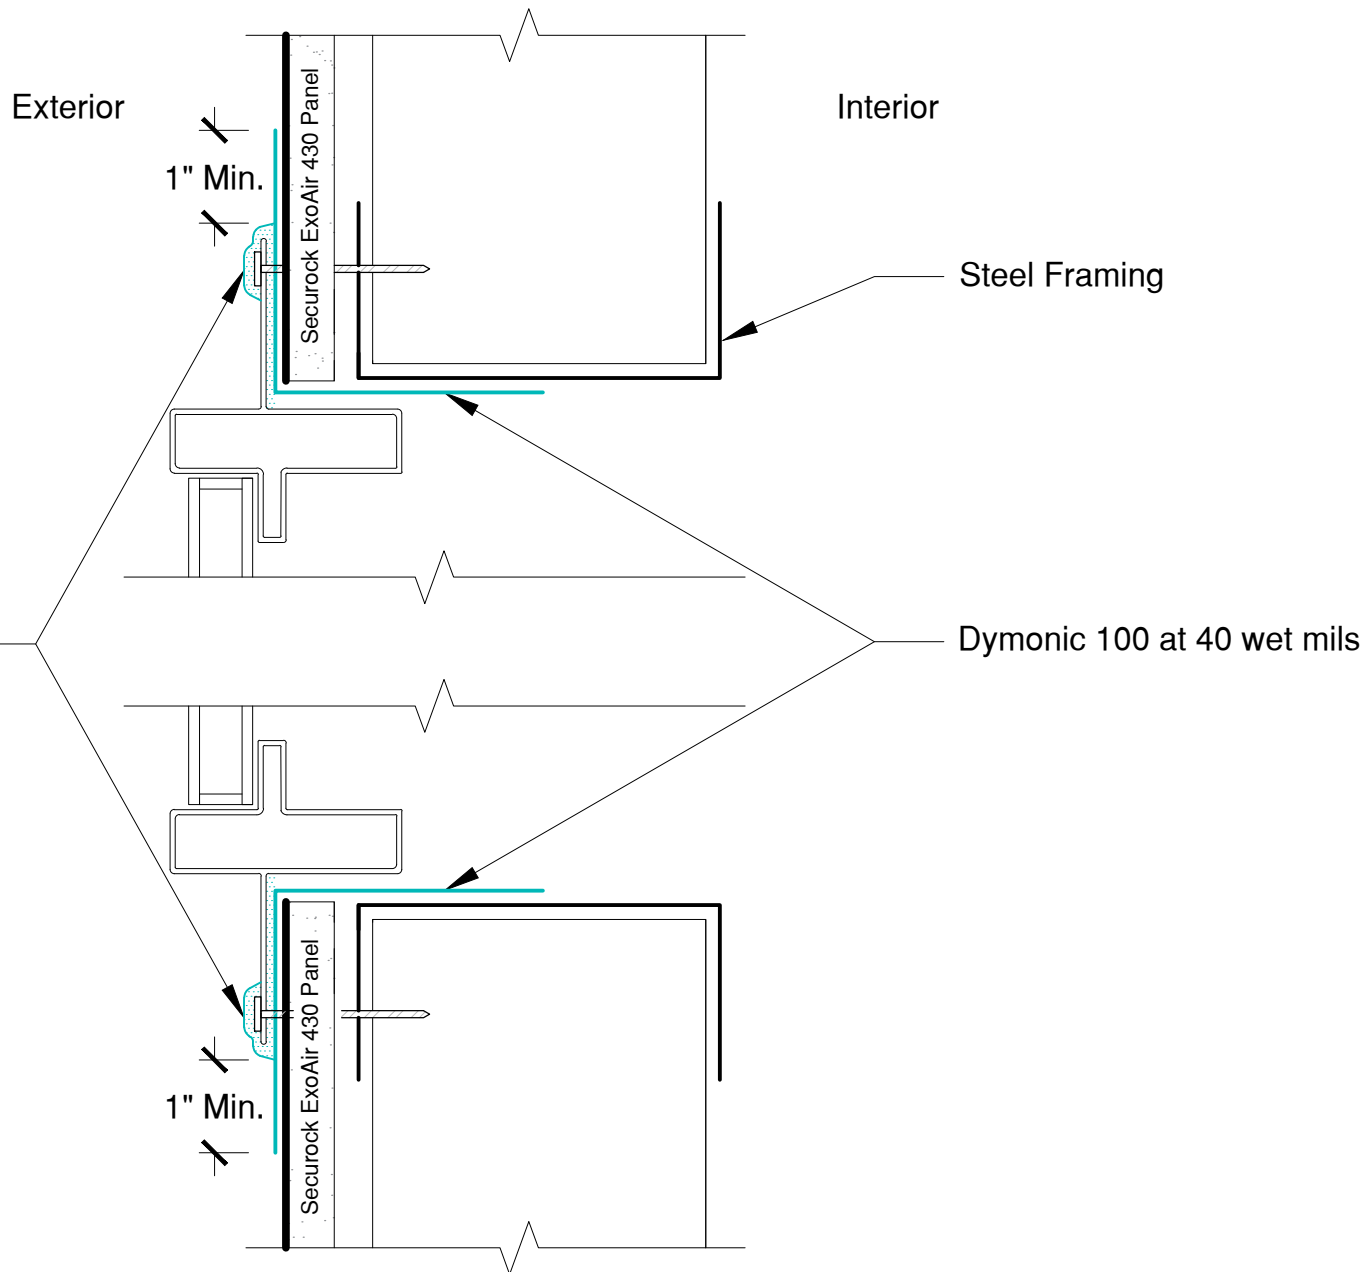

See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional*

*The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters. The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.*

**NOTE:**  
- Flashing must be installed past thermal break



**PERFORMANCE BUILT IN**  
[www.securockexoair.com](http://www.securockexoair.com)

**United States Gypsum Company**  
550 West Adams Street  
Chicago, IL 60661

USG Technical & Customer Support:  
800.USG.4YOU (874-4968)

**Tremco Commercial Sealants & Waterproofing**  
3735 Green Road  
Beachwood, OH 44122

Tremco Technical Support:  
866.209.2404

**SECUROCK® ExoAir® 430 Panel**

Project:  
Detail: Nail Flange - Dymonic 100 - Framing

Drawn by: KAB

Approved by: DM

Scale: NTS

File Name:

**14114**

Date: 3/20/2017

Rev #  
**00**