


# USG Ceilings Plus® Design Solutions


## COLORTEX™ - BARZ®

### ACOUSTIC PANEL SOLUTIONS

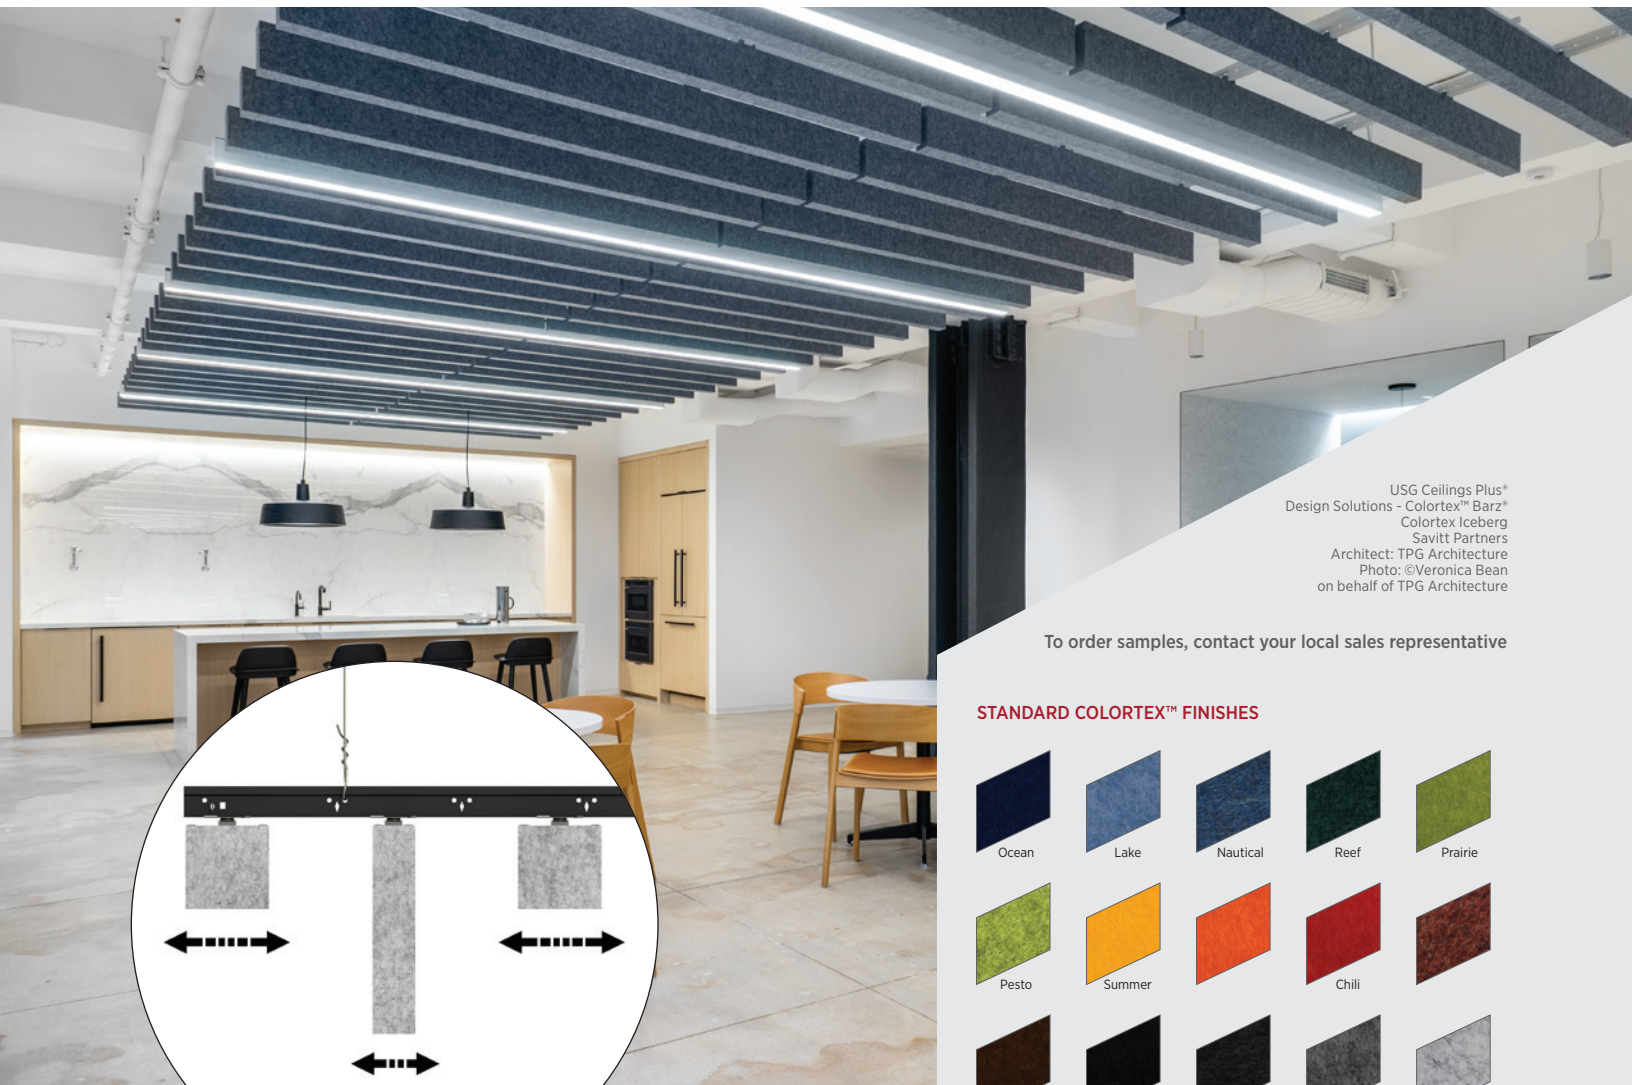

USG Ceilings Plus®  
Design Solutions - Colortex™ Barz®  
Colortex Iceberg  
Savitt Partners  
Architect: TPG Architecture  
Photo: ©Veronica Bean  
on behalf of TPG Architecture

To order samples, contact your local sales representative

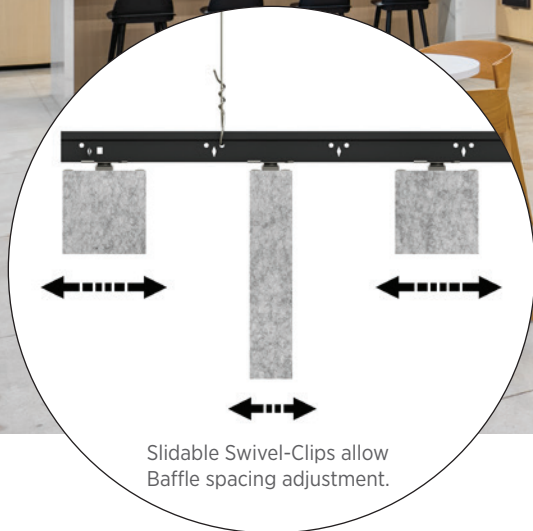


#### FEATURES AND BENEFITS

- Made from 100% recycled materials.
- Uses quick and easy to install swivel-clips that utilizes standard grid.
- Multiple profiles and unlimited spacing allow for endless possibilities.
- Provides excellent acoustic performance with Array-NRC<sup>1</sup> up to 1.20.
- Available in 12mm-thick material.
- Third party integration of diffusers, lights, speakers, sprinklers, wifi, etc. (independently suspended).

#### APPLICATIONS

- Interior Applications
- Pods, Islands, and Clouds
- Wall to Wall Ceilings
- Sloped Ceilings
- New Construction or Renovation
- Downward Accessible

#### STANDARD COLORTEX™ FINISHES

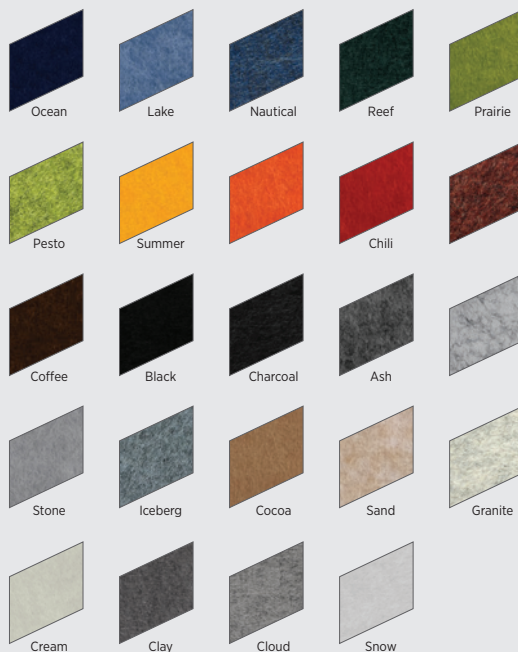

#### WOODGRAIN COLORTEX™ FINISHES



USG Ceilings Plus® Design Solutions  
COLORTEX™ - BARZ®  
ACOUSTIC PANEL SOLUTIONS





ORDER SAMPLES/LITERATURE  
Contact your local sales rep.

FOR MOST UP-TO-DATE  
TECHNICAL INFORMATION  
AND LEED REPORT TOOL  
Contact your local sales rep.

TECHNICAL SERVICES  
Contact your local sales rep.



PERFORMANCE  
OPTIONS

**Declare.** Declare® Labels on select finishes, see usg.ecomedes.com for more details and documentation.

Application	Grid Options	Finish	Accessibility	Thickness	Array-NRC <sup>1</sup>	Fire Rating	Recycled Content	Maintenance
								
Interior	Donn® Brand DX® (15/16" Grid)	24 Standard Colors and 3 Wood Grains	Full Downward	12mm	Up to 1.20+	Class A, ASTM E84 CAN/ULC S102.2	60% Post-consumer/40% Pre-consumer content (hardware excluded)	See Installation Guide


DESIGN PARAMETERS

FULLY INSTALLED SYSTEM

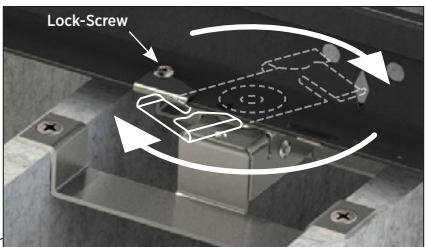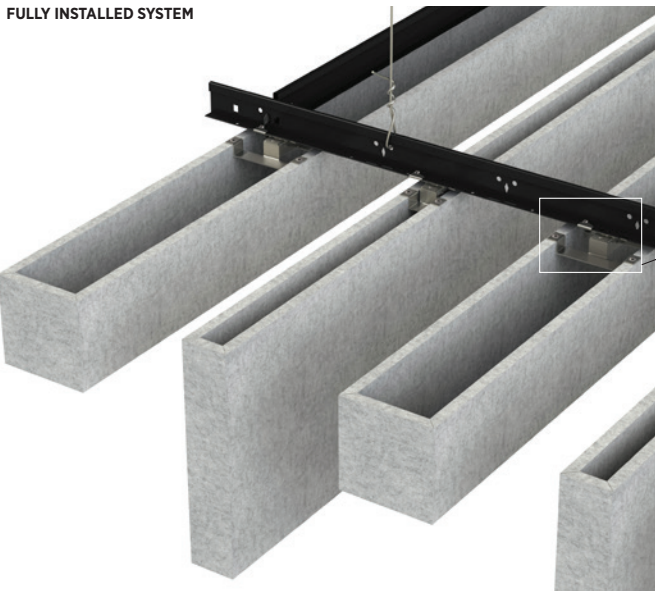

- Swivel-Clip mechanism secures Baffle to Main Tee
- Adjust Baffle spacing & set position with Lock-Screw

**SOLD AS INDIVIDUAL BAFFLE ASSEMBLIES**  
(brackets and swivel clips factory installed)

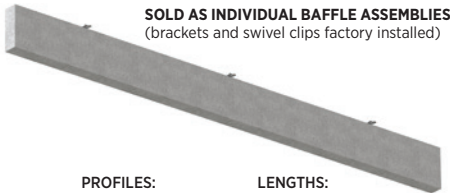

PROFILES:


- 2"W x 2"H
- 2"W x 5"H
- 2"W x 10"H
- 3"W x 2"H
- 3"W x 6"H
- 4"W x 2"H
- 4"W x 4"H
- 4"W x 8"H

LENGTHS:

- 48"L
- 72"L
- 96"L


DETAIL & ACCESSORIES

**INSTALLATION TYPE**

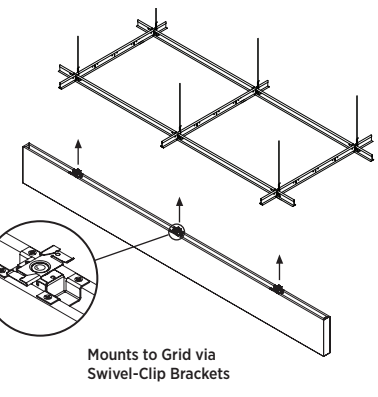


Mounts to Grid via Swivel-Clip Brackets

**JOINT DETAILS**

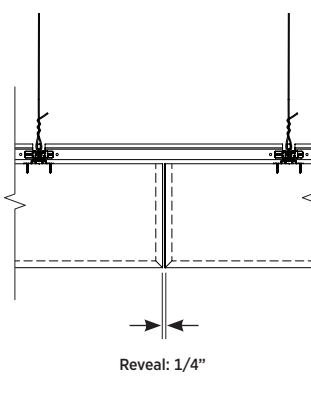

Reveal: 1/4"

**ACCESSORIES**

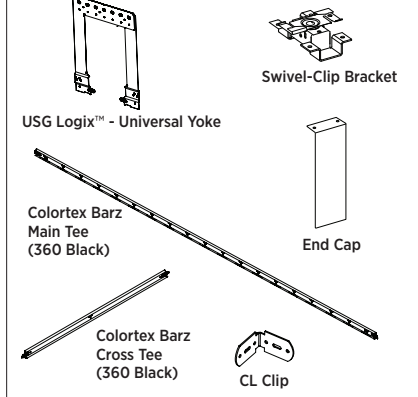

USG Logix™ - Universal Yoke

Colortex Barz Main Tee (360 Black)

Colortex Barz Cross Tee (360 Black)

Swivel-Clip Bracket

End Cap

CL Clip

**Low Emissions (VOC)**  
CDPH 01350 v1.2-2017 compliant, see usg.ecomedes.com for more details and documentation.

PHYSICAL DATA

Additional Documents and Resources

Installation Guide: IC277043  
Architectural Specification  
Cleaning Instructions: IC277043  
Warranty: SC2102

Fire Classification

Surface-burning characteristics  
ASTM E84: Class A  
CAN/ULC S102.2 results as follows:  
Flame Spread: 10  
Smoke Developed: 215

Suspension System

Supporting main tees are classified as Heavy Duty as classified per ASTM C635 when tested in accordance with ASTM E3090 and AC308.

Seismic Compliance

Suspension System is included in ICC ES ESR 1222 for use in Seismic Design Categories A through F when installed according to ASTM C636 and ASTM E580. Alternate installation methods may be used when designed by a registered engineer and approved by the authority having jurisdiction. Test reports for suspension system performance may be available upon request.

Acoustic Performance

1. Array-NRC is calculated per ASTM C423 and varies with Colortex Barz profile size and spacing. Colortex Barz spaced closely together can achieve higher Array-NRC.

Integration

Colortex Barz can accommodate a full range of Third-Party systems for any design intent. Air diffusers, speakers, sprinklers and other ceiling attached accessories can be independently attached to deck within our ceilings. CAD details are available online at [www.usg.com](http://www.usg.com).

Modification

Panels are easily modified in the field with standard tools. See our Installation Guide.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC277037/rev. 7-24  
© 2024 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Manufactured by  
USG Interiors, LLC  
550 West Adams Street  
Chicago, IL 60661

The trademarks USG, CEILINGS PLUS, CGC, Colortex, Barz, Logix, Donn, the USG/CGC logo, the Ceilings Plus logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

